


Quick Install Guide



Wireless N PowerLine Gigabit Router

Package Contents

- DHP-1565 Wireless N PowerLine Gigabit Router
- Ethernet Cable
- Power Adapter
- CD-ROM with Manual

If any of the above items are missing, please contact your reseller.

LEDs (from left to right)

- Power LED** - A solid green light indicates a proper connection to the power supply. The light will be solid red during boot up and during a factory reset.
- Internet LED**- A solid green light indicates that the Internet connection has successfully completed. This LED blinks green during data transmission. A solid orange light indicates that the physical link is up, but the ISP service is down.
- PowerLine AV LED** - A solid light indicates that a Powerline connection is established.

DHP-1565


Start Here

Before You Begin

- Please configure the router with the computer that was last connected directly to your modem.
- You can only use the Ethernet port on your modem. If you were using the USB connection before using the router, then you must turn off your modem, disconnect the USB cable and connect an Ethernet cable to the Internet port on the router, and then turn the modem back on. In some cases, you may need to call your ISP to change connection types (USB to Ethernet).
- If you have DSL and are connecting via PPPoE, make sure you disable or uninstall any PPPoE software such as WinPoet, Broadjump, or Enternet 300 from your computer or you will not be able to connect to the Internet.
- When running the Setup Wizard from the D-Link CD, make sure the computer you are running the CD from is connected to the Internet and online or the wizard will not work. If you have disconnected any hardware, re-connect your computer back to the modem and make sure you are online.

Start Here


Insert the provided CD into the CD-ROM drive on a computer that is **online** and click **Install Router** to start the Quick Router Setup Wizard.



Note: If you do not want to use the wizard, lost your CD, or are running Mac or Linux, you will need to use one of the Manual Setup procedures below.


Manual Setup (Router Mode)

1

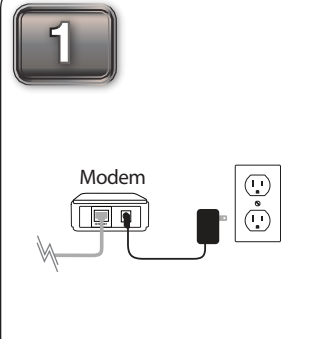


Turn off and unplug your cable or DSL broadband modem.

2

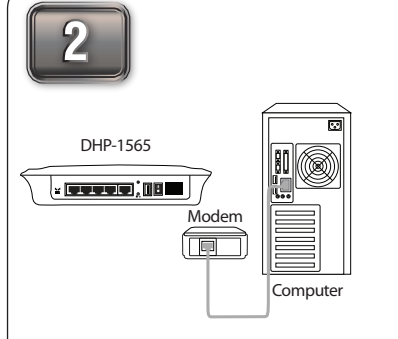


Position your router close to your modem and a computer. Place the router in an open area of your intended work area for better wireless coverage.

3

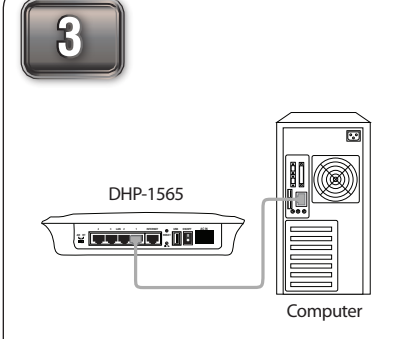


Unplug the Ethernet cable from your modem (or existing router) that is connected to your computer. Plug it into the blue port labeled **1** on the back of your router. The router is now connected to your computer.

4

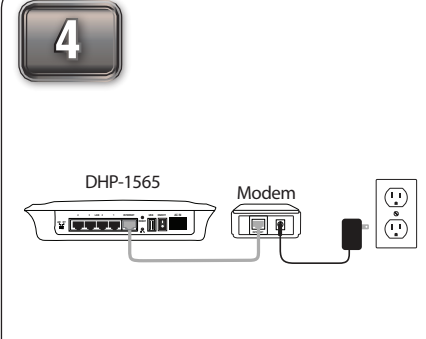


Plug one end of the blue Ethernet cable into the yellow port labeled **INTERNET** on the back of the router. Plug the other end of this cable into the Ethernet port on your modem. Then, reconnect the power adapter to your cable or DSL broadband modem.

5

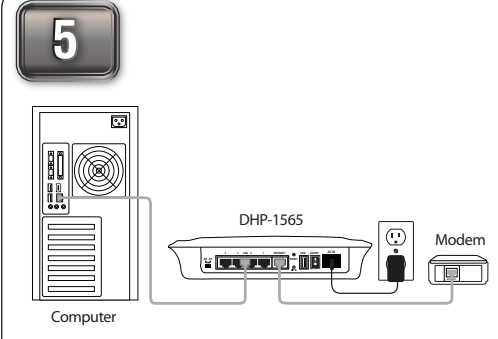

Connect the power adapter into the power port on the back of the router and then plug it into a power outlet. Press the power button and verify that the power LED is lit

6




Open a web browser and enter **http://dlinkrouter** or **http://192.168.0.1**.

Select **Admin** and leave the password box blank. Click **Log In** to continue the setup and follow the Setup Wizard.


Manual Setup (AP Mode)

1

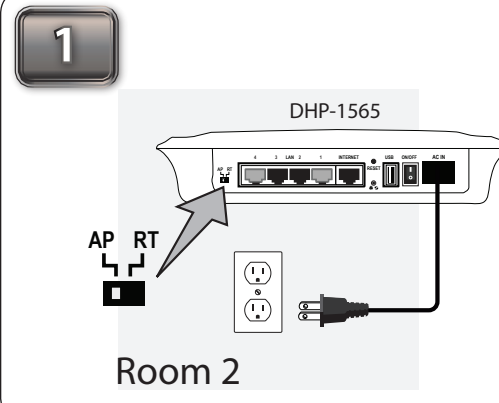


Place the DHP-1565 in a different area of your home. Next, move the switch to **"AP"**. Connect the power cord into the power receptor. Then, plug into a wall outlet and turn on the device.

2

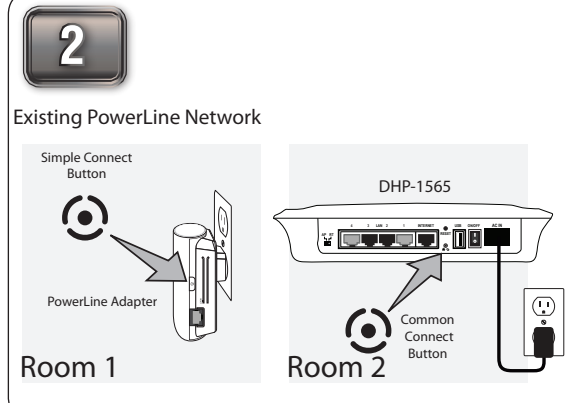


To secure your network, press the Common Connect button for 2 seconds on the DHP-1565. The Power LED will start to blink. Then, within 2 minutes, press the Simple Connect button on the adapter for 2 seconds. Verify if the PowerLine AV LED is on.

3

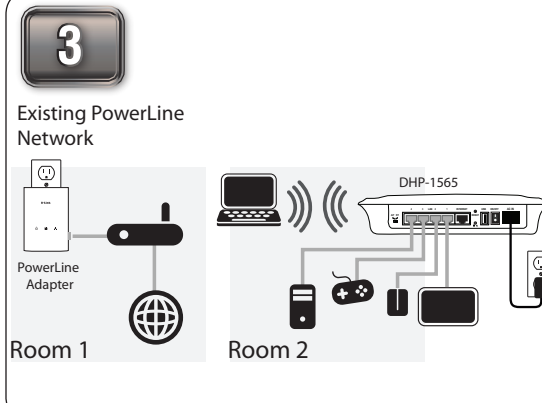

Connect one end of the Ethernet cable to the back of the DHP-1565 and attach the other end of the Ethernet cable to a PC, game console, NAS or TV.


4



Open a web browser and enter **http://dlinkrouterWXYZ** (**WXYZ**: four digit suffix of the PLC MAC Address) in the address field.

Select **Admin** for the user name and leave the password blank. Click **Log In**.


5

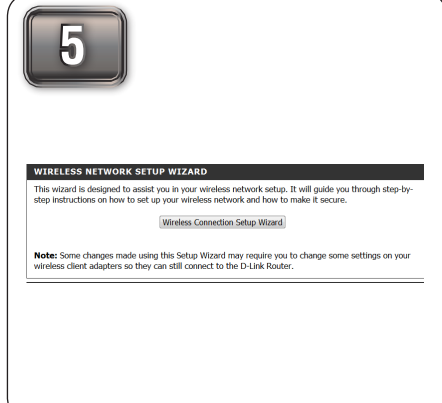

Click the **Wireless Connection Setup Wizard** button to run the wizard. Follow the on-screen instructions to configure your wireless settings


PowerLine Network Security (All Modes)

1

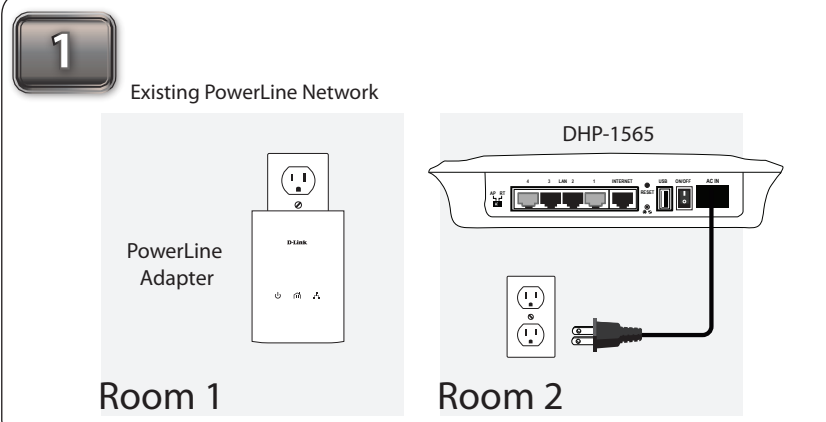


Plug one PowerLine AV 500 Adapter into an AC wall outlet. Verify that the Power LED is lit. If not, insert into another outlet. Now plug the DHP-1565 power chord into an AC wall outlet. Verify the Power LED is lit.

2

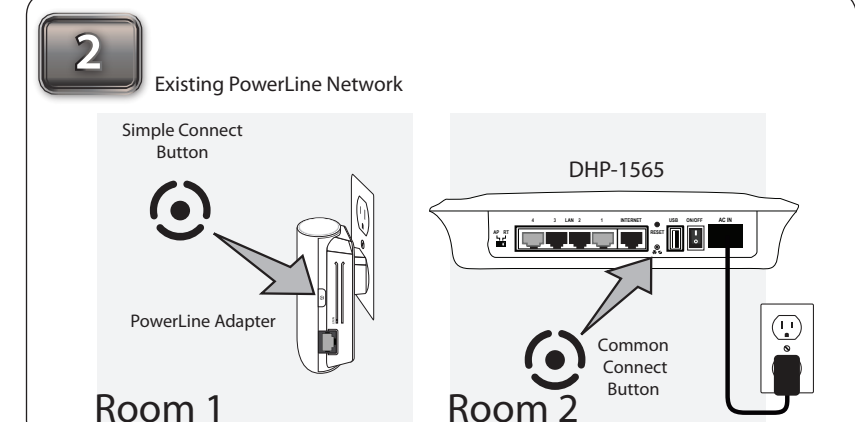

To secure your network, press the Simple Connect button for 2 seconds on one of the adapters. The Power LED will start to blink. Then, within 2 minutes, press the Common Connect button on the DHP-1565 for 2 seconds.

3

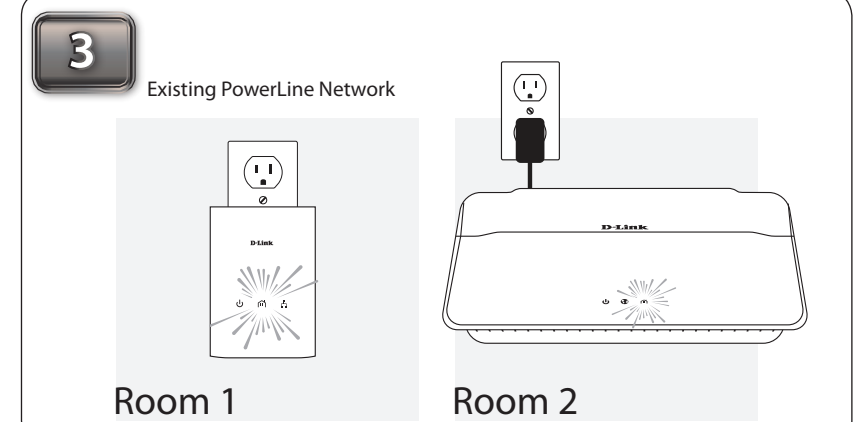

Verify that the PowerLine LED is lit on both the router and the adapter. This indicates that your PowerLine devices are properly connected to each other. If the LED is not lit, connect the adapter(s) in different outlets and repeat Step 2.

Technical Support

U.S. and Canadian customers can contact D-Link technical support through our web site or by phone. You can find software updates and user documentation on the D-Link website as well as frequently asked questions and answers to technical issues.

Before you contact technical support, please have the following ready:

- Model number of the product (e.g. DHP-1565)
- Hardware Revision (located on the label on the bottom of the product (e.g. rev A1))
- Serial Number (s/n number located on the label on the bottom of the product).

United States
Telephone: (877) 453-5465
Internet: <http://support.dlink.com>

Canada
Telephone: (800) 361-5265
Internet: <http://support.dlink.ca>

©2011 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link and the D-Link logo are registered trademarks of D-Link Corporation or its subsidiaries in the United States and/or other countries. Other trademarks or registered trademarks are the property of their respective owners.

Maximum wireless signal rate derived from IEEE Standard 802.11g, 802.11a and 802.11n specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, and network overhead, lower actual data throughput rate. Environmental conditions may adversely affect wireless signal range.

Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted on the package. Visit dlink.com (US) or dlink.ca (Canada) for more details.