




Dell Inspiron 13 1370 Memory Modules Replacement

Written By: Terrence15

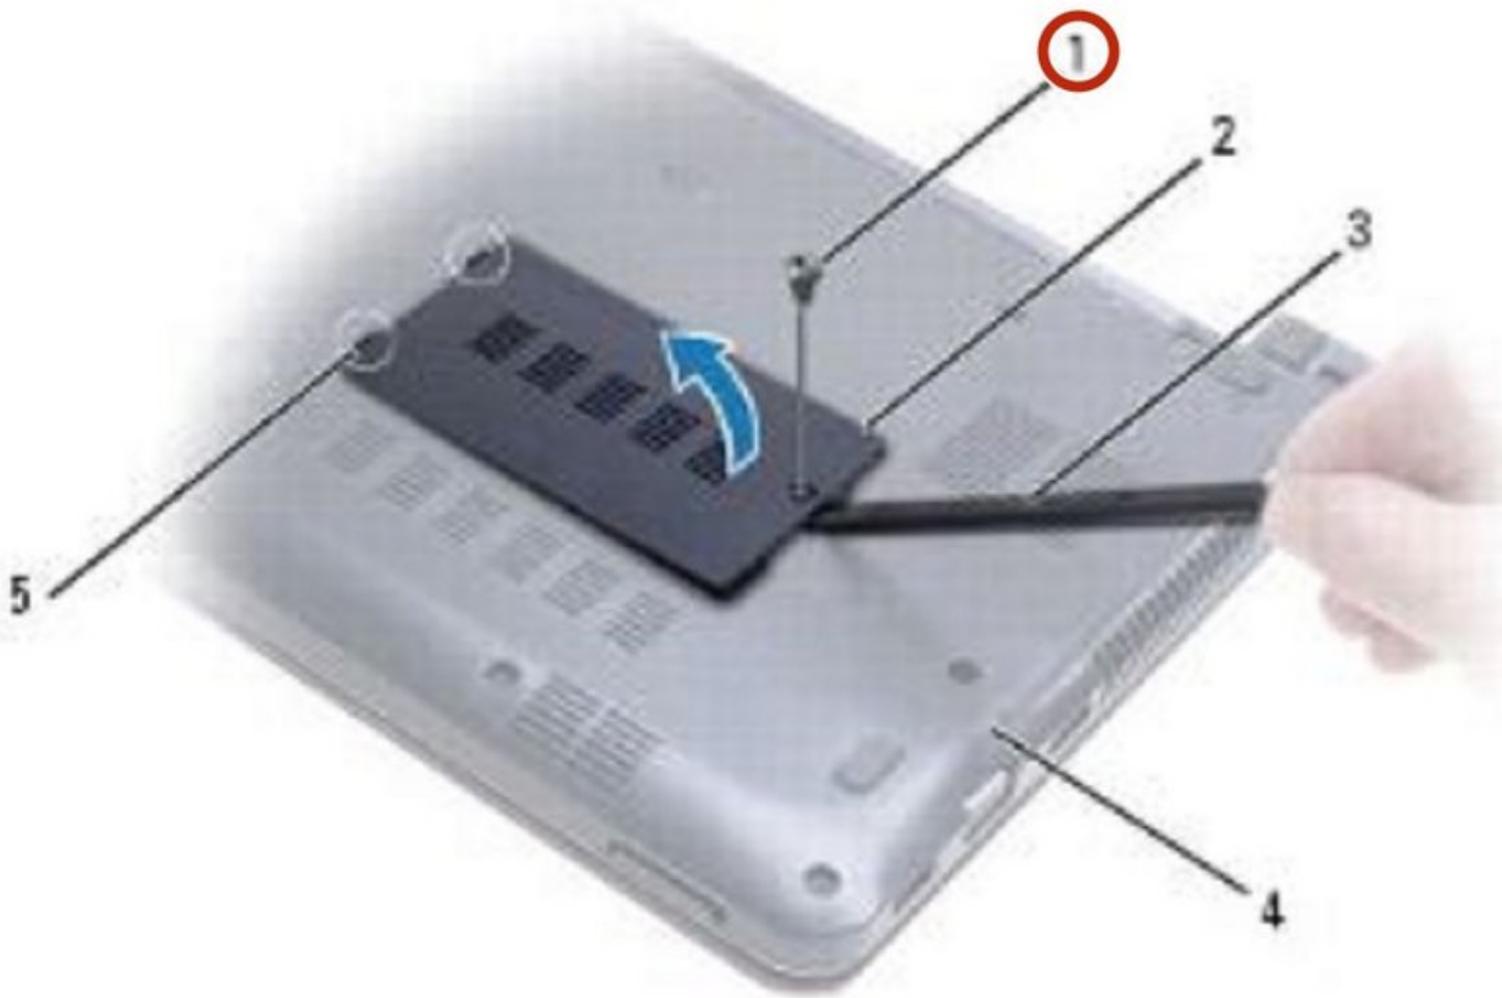


INTRODUCTION

In this guide, we will show you how to remove and replace Memory Modules.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-


Step 1 — Remove the Screw

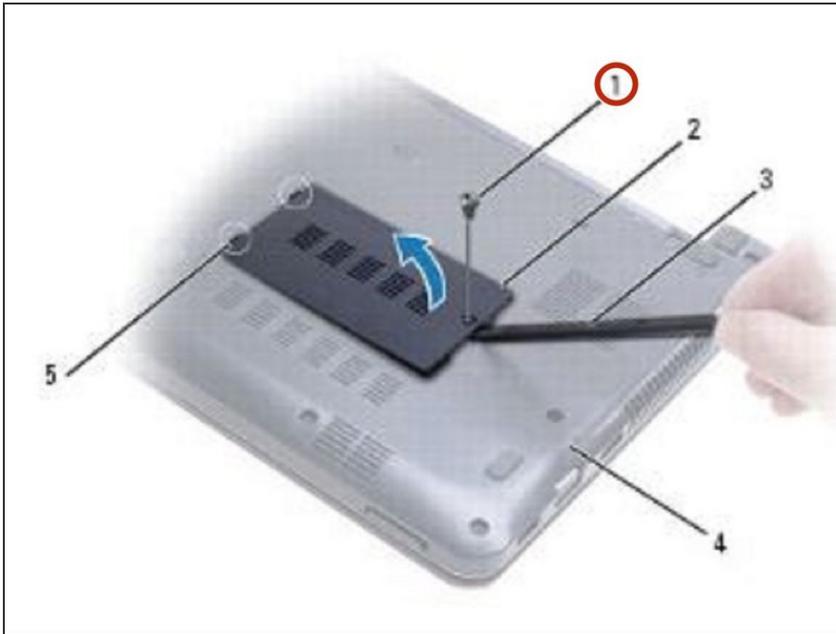

⚠ WARNING: Before working inside your computer, read the safety information that shipped with your computer. Follow the procedures in [Before You Begin](#).


- Remove the screw that secures the memory module cover to the computer base.

Step 2 — Lifting the Memory Module Cover

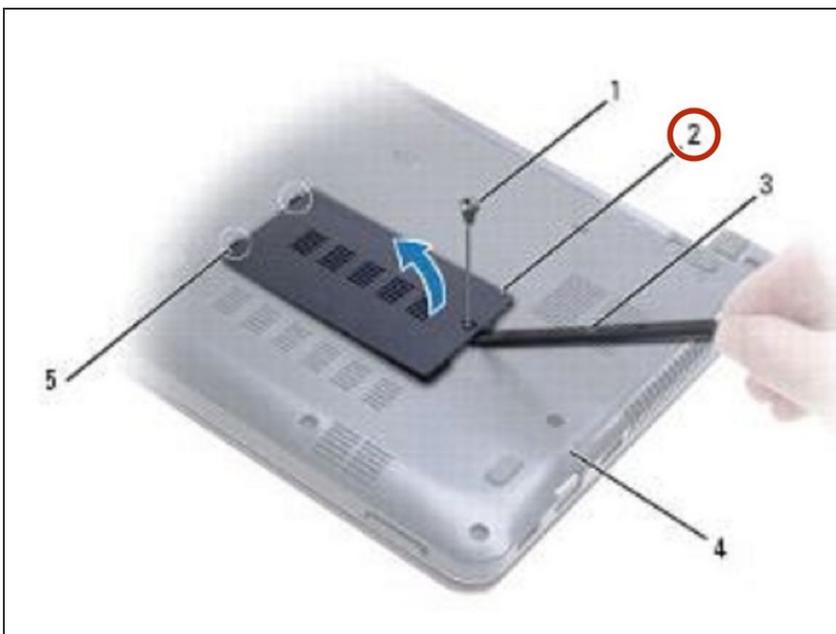

- Use a plastic scribe to lift the memory module cover up at an angle and ease the tabs out of the computer base.



Step 3 — Popping up the Memory Module

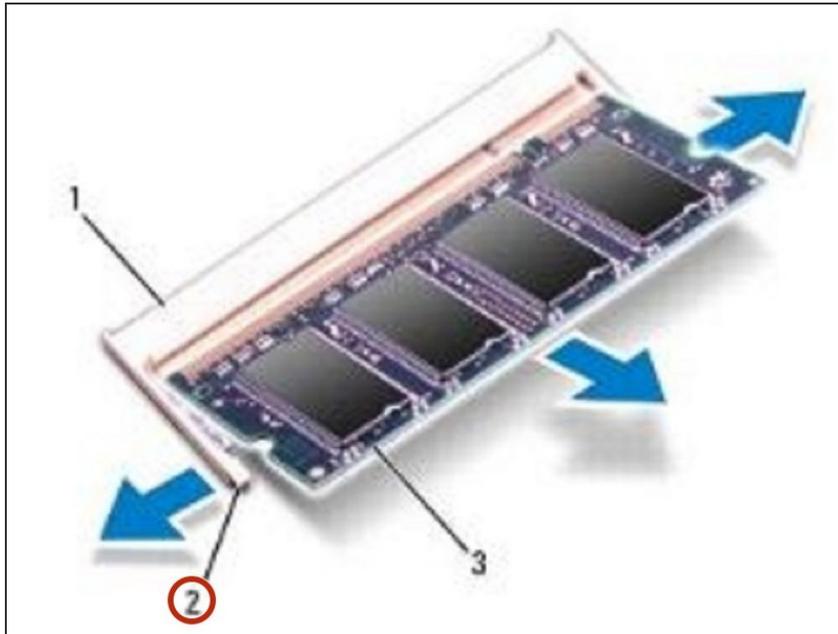

⚠ CAUTION: To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.


- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the module pops up.

Step 4 — Removing the Memory Module

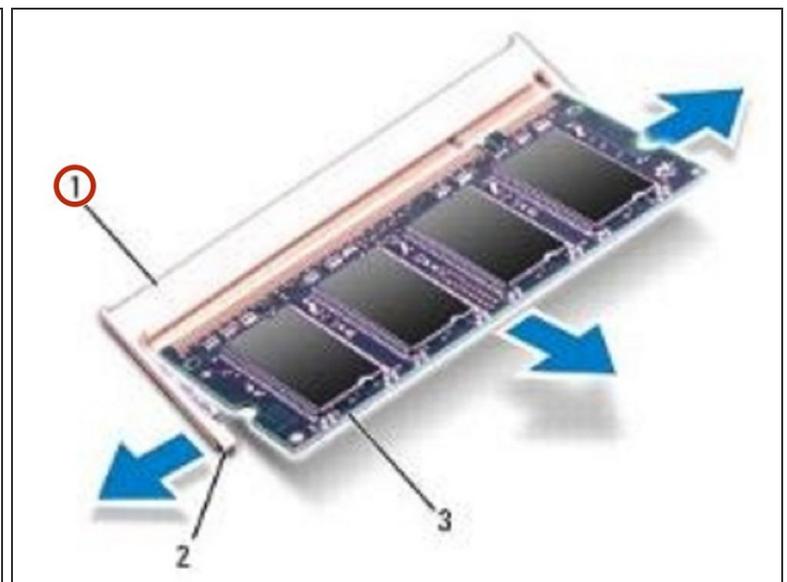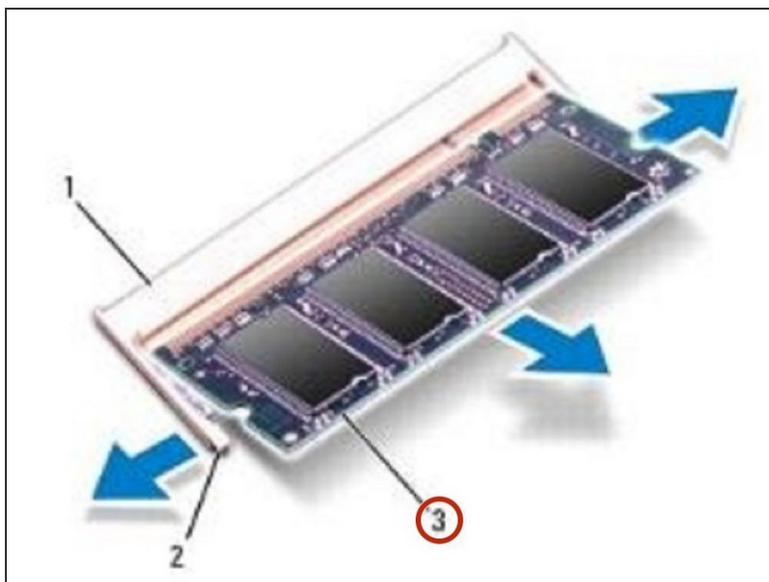


- Remove the memory module from the memory module connector.

Step 5 — Align the Notch

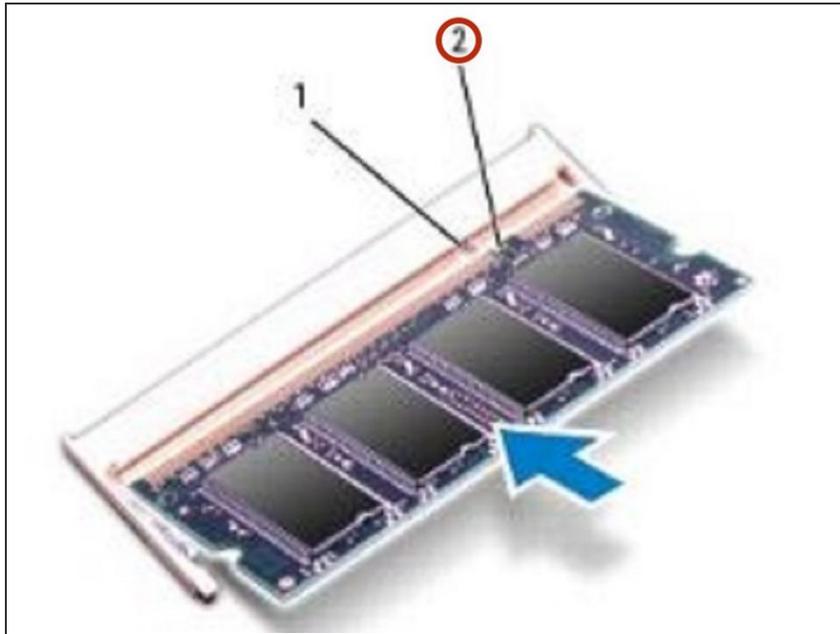

- Align the notch in the **NEW** memory module with the tab in the memory module connector.


Step 6 — Sliding the Memory Module

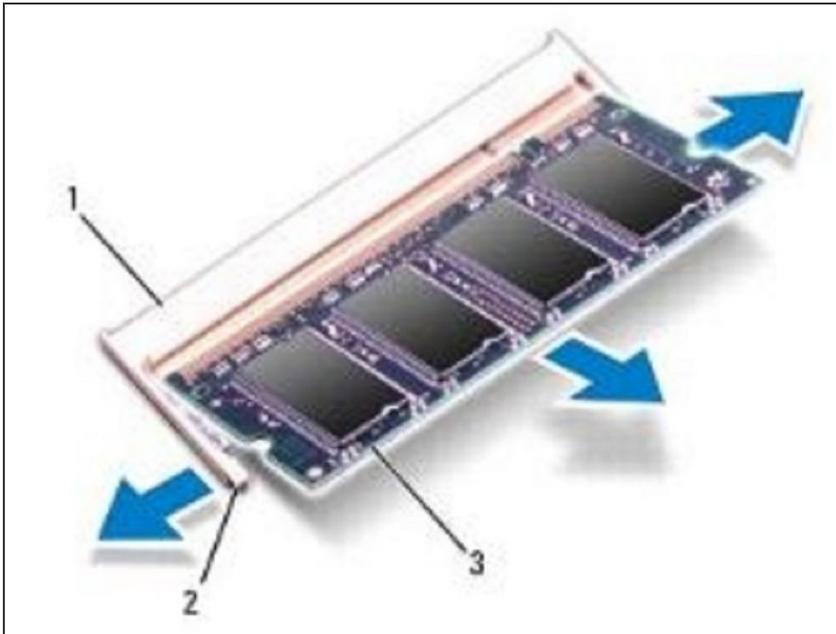

- Slide the memory module firmly into the slot at a 45-degree angle, and press the memory module down until it clicks into place. If you do not hear the click, remove the memory module and reinstall it.


(i) NOTE: If the memory module is not installed properly, the computer may not boot.

Step 7 — Align the Tabs

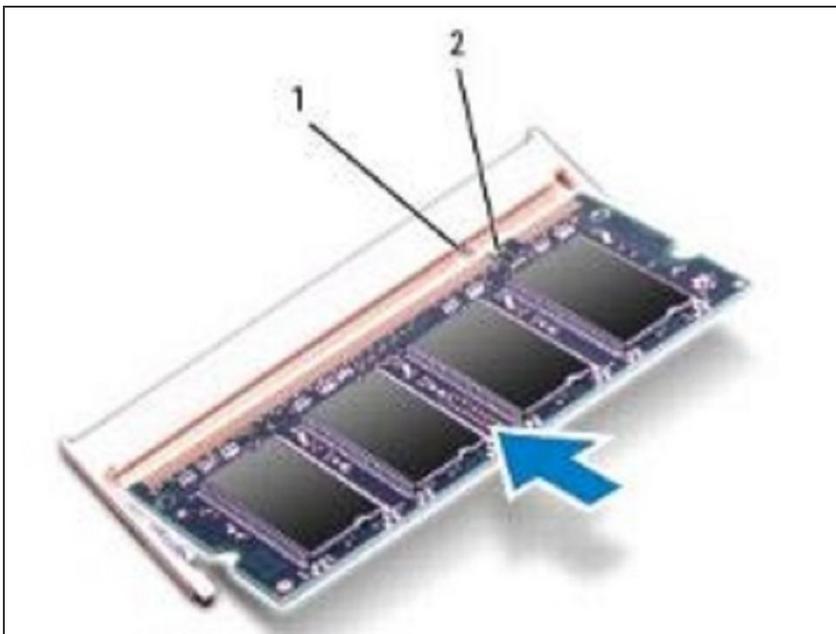

- Align the tabs on the memory module cover with the slots on the computer base and snap the cover into place.

Step 8 — Replace the Screw

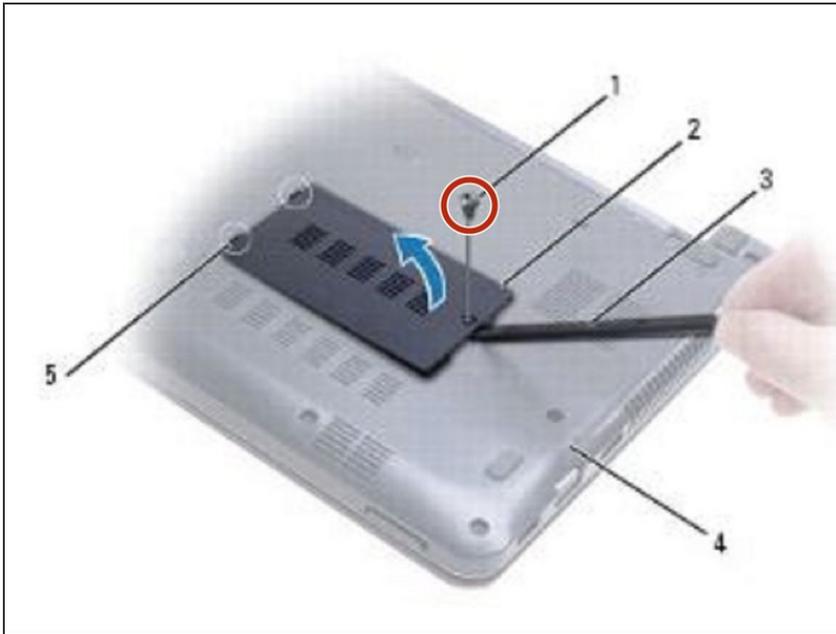

- Replace the screw that secures the memory module cover to the computer base.

To reassemble your device, follow these instructions in reverse order.