



AT&T 585-300-526  
Issue 1  
Comcode 107073959  
December 1993

**DEFINITY® AUDIX® System**  
**Announcement Customization**  
**Standard U.S. TDD**

**Copyright © 1993 AT&T  
All Rights Reserved  
Printed in U.S.A.**

### **Notice**

While reasonable efforts were made to ensure that the information in this document was complete and accurate at the time of printing, AT&T can assume no responsibility for any errors. Changes and corrections to the information contained in this document may be incorporated into future reissues.

### **Your Responsibility for Your System's Security**

You are responsible for the security of your system. AT&T does not warrant that this product is immune from or will prevent unauthorized use of common-carrier telecommunication services or facilities accessed through or connected to it. AT&T will not be responsible for any charges that result from such unauthorized use. Product administration to prevent unauthorized use is your responsibility and your system administrator should read all documents provided with this product to fully understand the features available that may reduce your risk of incurring charges.

### **Federal Communications Commission Statement**

**Part 15: Class B Statement.** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio-frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures

- Reorient the receiving television or radio antenna where this may be done safely.
- To the extent possible, relocate the receiver with respect to the telephone equipment.
- Where the telephone equipment requires ac power, plug the telephone into a different ac outlet so that the telephone equipment and receiver are on different branch circuits.

**Part 68: Network Registration Number.** This equipment is registered with the FCC in accordance with Part 68 of the FCC Rules. It is identified by FCC registration number AS593M-11185-MF-E.

### **Trademarks**

AUDIX is a registered trademark of AT&T.

DEFINITY is a registered trademark of AT&T. In this document, DEFINITY Communications System Generic 3 is often abbreviated to DEFINITY Generic 3 or Generic 3.

UNIX is registered trademark of UNIX Systems laboratories Inc.

### **Ordering Information**

The ordering number for this document is 565-300-526. To order this document, call the AT&T Customer Information Center at 1-600-432-6600 (in Canada, 1-800-255-1242). For more information about AT&T documents, refer to the *Global Business Communications Systems Publications Catalog* (555-000-010).

### **Comments**

To comment on this document, return the comment card at the front of the document.

### **Acknowledgment**

This document was prepared by the GBCS Product Documentation Development group, AT&T Bell Laboratories Denver, CO 80234-2703.

# Contents

---

---

<b>About This Document</b> . . . . .	<b>vii</b>
INTENDED AUDIENCES . . . . .	vii
PREREQUISITE SKILLS OR KNOWLEDGE . . . . .	vii
HOW THIS DOCUMENT IS ORGANIZED . . . . .	vii
HOW TO USE THIS DOCUMENT . . . . .	viii
CONVENTIONS USED IN THIS DOCUMENT . . . . .	viii
TRADEMARKS AND SERVICE MARKS . . . . .	viii
RELATED RESOURCES . . . . .	ix
HOW TO MAKE COMMENTS ABOUT THIS DOCUMENT . . . . .	ix
<b>1. Overview</b> . . . . .	<b>1-1</b>
WHAT ARE FRAGMENTS AND ANNOUNCEMENTS . . . . .	1-1
SYSTEM AND ADMINISTRATIVE ANNOUNCEMENT SETS . . . . .	1-3
U.S. ENGLISH AND U.S. ENGLISH TERSE ANNOUNCEMENT S E T S . . . . .	1-3
INTERNATIONAL LANGUAGE SETS . . . . .	1-4
TELECOMMUNICATIONS DEVICE FOR THE DEAF (TDD) . . . . .	1-4
CUSTOM ANNOUNCEMENT SETS . . . . .	1-5
<b>2. Announcement Customization Procedures</b> . . . . .	<b>2-1</b>
<b>3. Variables in Announcements</b> . . . . .	<b>3-1</b>
<b>A. Standard Announcements</b> . . . . .	<b>A-1</b>

---

---

**B. Fragment/Announcement Cross-Reference . . . . .B-1**

**Index . . . . . IN-1**

## LIST OF FIGURES

Figure 1-1. Sample of How Announcements Link Voice Fragments to Events . . . .	1-2
--	-----



# About This Document

---

---

The DEFINITY AUDIX system allows you to customize system announcements for your specific needs. This document describes how to customize announcements in the AT&T DEFINITY® AUDIX® System R3.0. It covers the customization procedures, and it provides two appendixes containing the announcements and fragments in the standard announcement set.

This document focuses on how to perform customization tasks. Use this document with its companion reference, *DEFINITY AUDIX R3.0 Forms Reference* (585-300-207), which contains detailed information about each administration form needed to perform DEFINITY AUDIX announcement customization.

## INTENDED AUDIENCES

This document is intended for administrators of the DEFINITY AUDIX system who wish to customize system announcements for their company applications.

## PREREQUISITE SKILLS OR KNOWLEDGE

This document assumes that the reader is familiar with using the DEFINITY AUDIX forms. Training for DEFINITY AUDIX administration is available and is strongly recommended.

## HOW THIS DOCUMENT IS ORGANIZED

- Chapter 1, *Overview*, describes the announcements, fragments, and the standard announcement set and provides an overview of how they are used in the DEFINITY AUDIX system.
- Chapter 2, *Announcement Customization Procedures*, describes the major tasks involved in customizing system announcements and fragments.
- Chapter 3, *Variabables in Announcements*, describes the variables encountered in system announcements and how they are used.
- Appendix A, *Standard Announcements*, lists each standard announcement and the fragments (both fragment numbers and text) that compose the announcement.
- Appendix B, *Fragment/Announcement Cross-Reference*, lists for each standard fragment the fragment text and the announcements that use that specific fragment.

## HOW TO USE THIS DOCUMENT

This document describes announcement customization procedures for the DEFINITY AUDIX system. Use this document in conjunction with the *DEFINITY AUDIX R3.0 Forms Reference* (585-300-207). The forms reference document contains specific instructions for using each form

## CONVENTIONS USED IN THIS DOCUMENT

To help you locate and identify information this guide uses visual cues and standard text formats. The following typographic conventions are used in this document:

- Constant -width type identifies information that appears on your computer screen including displays, field names, prompts, and error messages. Constant-width bold type identifies information that you type just as it appears in the document. Here is an example

At the when? prompt type now

If the system is not yet ready to receive your input you receive the following error message:

```
#1: System is not ready; try again in five minutes.
```

- Around-cornered box identifies keyboard keys. For example, an instruction to press the Enter key might appear in this document as:

Press **Enter** .

- A round-cornered box also identifies multiple keyboard keys that must be pressed at the same time (that is, you hold down the first key while pressing the second key and if appropriate, the third key as well). A hyphen separates each key, in this case. For example, an instruction to press and hold **ALT** while typing the letter *d* appears in this document as:

Press **ALT-d** .

- CAPITAL LETTERS enclosed by angle brackets (<>) identify variables, when you or the system must provide a specific value. For example, a variable to determine the calling party's extension appears in a system announcement as <EXTENSION>.
- *Italics* identify announcement and fragment text invoked by the DEFINITY AUDIX system (example: *To record names, press 4.*)

## TRADEMARKS AND SERVICE MARKS

The following trademarked products are mentioned in this document

- AUDIX® is a trademark of AT&T.
- DEFINITY® Communications System is a registered trademark of AT&T.
- UNIX is a registered trademark of UNIX System Laboratories Inc.

## RELATED RESOURCES

In addition to this document DEFINITY AUDIX Documentation includes the following:

- *DEFINITY AUDIX System R3.0 System Description* (585-300-205)
- *DEFINITY AUDIX System R3.0 Feature Descriptions* (585-300-206)
- *DEFINITY AUDIX System R3.0 Installation* (585-300-111)
- *Switch Administration for DEFINITY AUDIX System R3.0* (585-300-509)
- *DEFINITY AUDIX System R3.0 Forms Reference* (585-300-207)
- *DEFINITY AUDIX System R3.0 Administration and Data Acquisition Package* (585-302-502)
- *A Portable Guide to DEFINITY AUDIX Voice Messaging* (585-300-701)
- *DEFINITY AUDIX System Voice Messaging Wallet Card* (585-300-704)
- *AUDIX Business Card Sticker* (585-304-705)
- *DEFINITY AUDIX System R3.0 Quick Reference* (585-300-702)
- *DEFINITY AUDIX System R3.0 Voice Messaging Subscriber Document Artwork* (585-300-703)
- *DEFINITY AUDIX System R3.0 Maintenance* (585-300-110)
- *DEFINITY AUDIX System R3.0 Documentation Guide* (585-300-010)

## HOW TO MAKE COMMENTS ABOUT THIS DOCUMENT

A reader comment card follows the title page. While we have tried to make this document fit your needs, we are interested in your suggestions for improving it and urge you to fill it out.

If the reader comment card has been removed from this document please send your comments to:

AT&T  
Product Documentation Development  
11900 North Pecos Street  
Room 22-2c11  
Denver, Colorado 80234



# 1. Overview

---

While using the DEFINITY AUDIX voice messaging system, you hear voice prompts called *announcements*. Announcements are comprised of separate instructions called *fragments*, which tell you what to do and what your options are. You can change AUDIX announcements to more exactly meet the needs of your business and subscribers. Use commands and procedures described in this document to change announcements.

## WHAT ARE FRAGMENTS AND ANNOUNCEMENTS

To effectively change announcements, you need to understand precisely what fragments and announcements are.

### Fragments

The voice prompts that you hear in AUDIX consist of one or more pieces of recorded text called *fragments*. A fragment can be a recorded word, phrase, or sentence. Each fragment is identified by a alphanumeric code starting with the letter *f*. For example, the voice prompt *Previous login incorrect. Please re-enter extension and pound sign*, is composed of two fragments:

- **f233** *Previous login incorrect. Please re-enter extension,*
- **f224** *and pound sign.*

### Announcements

An *announcement* is actually a placeholder within the system that plays the fragments. For each event that may occur within AUDIX, AUDIX permanently assigns one or more announcements, each identified by number, to that event. AUDIX then assigns fragment number(s) to the announcement numbers.

Thus, when a caller or subscriber completes an event (normally pushing a button), AUDIX processes the announcement number assigned to that event and then plays the fragments assigned to that announcement. Each announcement is identified by a code starting with the letter **a**, also known as the announcement number. For instance, **a10** is announcement 10.

Look at the sample event sequence in Figure 1-1. Announcement a815 marks the point where fragments are played when the caller connects to AUDIX. The *us-eng* voice prompt at this point says *Welcome to AUDIX. For help at any time, press \*H*. As the caller continues to press more keys additional announcements trigger AUDIX to play the assigned fragments.

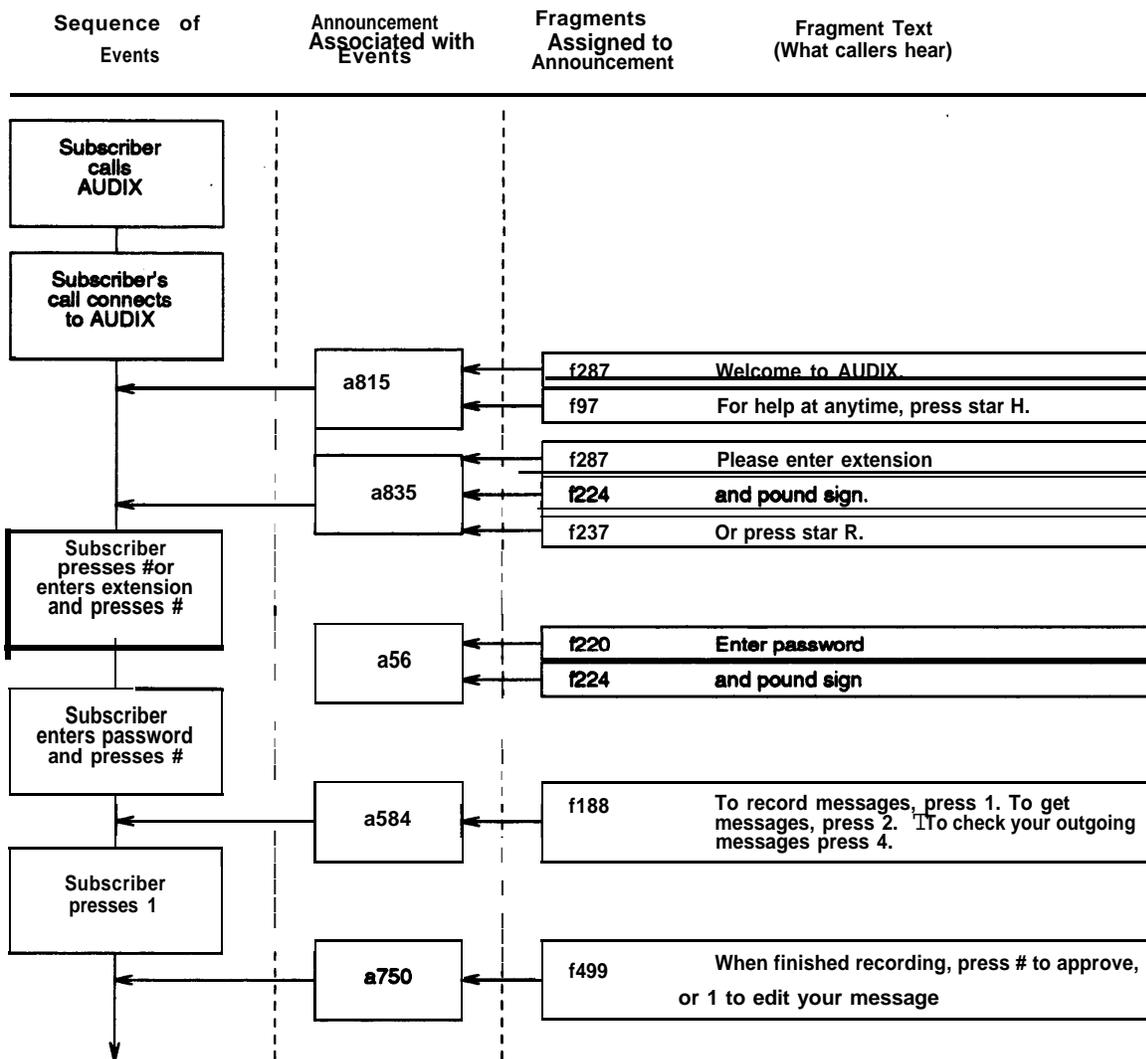


Figure 1-1. Sample of How Announcements Link Voice Fragments to Events

Announcements are fixed in place. You cannot use an announcement number to mark a different point in the AUDIX system. Therefore, you cannot add, change, or delete an announcement number. However, you *can* add change, or delete fragments assigned to announcements — and thereby change announcements.

See Appendix A, “Standard Announcements,” for a complete list of announcements. See Appendix B, “Fragment/Announcement Cross-Reference” for a complete list of fragments.

## SYSTEM AND ADMINISTRATIVE ANNOUNCEMENT SETS

Announcement sets are identified to AUDIX as either *system* or *administrative*. *System* means that this announcement set is the default announcement set for all system prompts and announcements. *Administrative* means that the set can be customized.

A set can be **both** system and administrative. When this is true, announcement set changes will become immediately effective for AUDIX users. Therefore you should test and verify your changes to the administrative announcement set before identifying it as the system set using the corresponding fields on the SYSTEM-PARAMETERS FEATURES form.

The default system announcement set is the U.S. English (*us-eng*) announcement set.

You also use the SYSTEM\_PARAMETERS FEATURES form to replace the *us-eng* version with the terse version as the system announcement set.

## U.S. ENGLISH AND U. S. ENGLISH TERSE ANNOUNCEMENT SETS

An *announcement set* is a collection of announcements.

The U.S. English system comes with two announcement set versions: U.S. English (*us-eng*) and U. S. English terse (*us-eng-t*). Each set contains all the announcements and fragments necessary to prompt subscribers.

The *us-eng* announcement set is installed as the system by default. The terse set of announcements may be optionally used. The terse version contains all of the announcements in the *us-eng* version, but individual announcements contain fewer words while conveying the same message. For example, the *us-eng* announcement **a2** is “Partial entry deleted.” The *us-eng-t* version of their announcement is “deleted.”

## INTERNATIONAL LANGUAGE SETS

DEFINITY AUDIX now offers seven language announcement sets. The following are the available languages and the corresponding announcement set name:

Language	Announcement set
<b>Standard U.S. English</b>	us-eng
<b>Terse U.S. English</b>	us-eng-t
<b>123 U.S. English</b>	us-123
<b>TDD ENGLISH</b>	us-told
<b>British English</b>	british
<b>Latin Spanish (Español)</b>	lat-span
<b>French Canadian (Canadien Français)</b>	french-c

You may specify these, or your own custom announcement set in the Login Announcement Set, Call Answer primary Announcement Set, and Call Answer Secondary Announcement Set fields on the CLASS OF SERVICE and SUBSCRIBER forms.

## TELECOMMUNICATIONS DEVICE FOR THE DEAF (TDD)

People with certain types of communication impairments (such as deafness) often rely on a teletype-like machine, called a TDD (Telecommunication Device for the Deaf), when interacting over telephone lines. Although originally intended as a voice messaging system, Definity AUDIX now supports TDD messaging as well. A specialized TDD announcement set is provided for this purpose.

In general, AUDIX TDD messaging works the same way as voice messaging. All of the AUDIX touchtone commands (such as \*H, \*D, etc.) work in exactly the same manner. The chief distinction is that rather than speaking and listening, TDD users type on their TDD keyboard and read the text that appears on their TDD display.

There is, however, one aspect of TDD communication that may cause occasional problems for the user. The problems stem from the fact that TDD communication is *moded* and therefore a TDD will be in one of two modes: “letters” mode or “numbers and figures” mode. If the user’s TDD gets out of synchronization with AUDIX, that is if one of them is in letters mode and the other numbers/figures, the text that appears on the user’s display will make no sense to the user.



If an incoming message on a TDD is a meaningless string of characters, the TDD may be in the wrong mode. To change modes, press the appropriate mode reset button; letters reset if the current characters are numbers, or numbers reset if the current characters are letters. If you do not have mode reset buttons, type any letter to change numbers to letters, or type any number to change letters to numbers.

TDDs rely on the Baudot communications protocol, in which the same five-bit code may represent either a letter or a non-alphabetic character, such as a number or figure. For example, the binary code 00001 is both the letter E and the number 3, depending on which mode the TDD is in. If a receiving TDD is set to letters mode (by receiving the five-bit code 11111), then the TDD assumes all subsequent five-bit character codes received are letters. By contrast if a receiving TDD is set to numbers/figures mode (by receiving the five-bit code 1101 1), then the TDD assumes all subsequent five-bit character codes received are numbers and figures. When a TDD is not in the same mode as the device that is transmitting to it, the characters that display on the receiving TDD will make no sense to the user.

All DEFINITY AUDIX TDD announcements contain the appropriate mode reset codes to ensure that the receiving TDD stays mode-synchronized with the DEFINITY AUDIX system during announcement playback. A reset code at the beginning of each fragment identifies whether the first character of that fragment is a letter or a number/figure. When recording custom fragments, be sure to type the appropriate reset code at the beginning of each fragment.

It is the administrator's responsibility to ensure mode synchronization when recording custom announcements. Some TDDs have both a letters key and a numbers/figures key for switching to the indicated mode. If the first character in an announcement is a letter, press the letters key before you type anything else; or, if the first character in an announcement is a number or figure press the numbers/figures" key before you type anything else.

Most TDDs do not have a letters key and a numbers/figures key. If you do not have separate letters and numbers/figures keys, synchronization of modes is more inconvenient but can be accomplished in the following way:

- If the first character you need to type is a letter, enter a slash (/); then press the spacebar a few times before you start typing. This causes the system to insert a letters mode reset signal in the message.
- If the first character you need to type is a number or figure, type *x*, or another number; then press the spacebar a few times before you start typing. This causes the system to insert a numbers/figures mode reset signal in the message.

For more information on the TDD, refer to *DEFINITY AUDIX Features Descriptions*, (585-300-206).

## CUSTOM ANNOUNCEMENT SETS

You can create and activate custom announcement sets with customized messages that meet the specific needs of your business and system users. Creating a custom announcement set consists of four steps:

1. Adding the new announcement set name to the system
2. Copying into this new set the announcements from another set
3. Changing the announcements and fragments in the custom set
4. Activating the custom set

The next chapter describes in detail how to do this.

## 2. Announcement Customization Procedures

---

You can customize announcements in the following ways:

- Re-record a fragment
- Eliminate a fragment
- Add a fragment

How you customize announcements depends on the announcement and whether the fragments contained in that announcement are used in other system announcements.

The following procedures describe how to create a new announcement set, and how to alter an announcement by re-recording a fragment, eliminating a fragment, or adding a fragment. Refer to *DEFINITY AUDIX System R3.0 Forms Reference (585-300-207)* for a complete description of how to use the forms.



If you are customizing TDD announcement fragments, the procedure is the same as customizing other announcement sets. As described in Telecommunications Device for the Deaf (TDD) in the *Overview* chapter, be sure each customized fragment begins with a reset code. If using TDD for recording, all commands to AUDIX are still through the **touchtone** keypad; TDD is used in place of listening or speaking.

### Creating a New Announcement Set

Before you customize announcements, you should create a customized announcement set and identify it as an *administrative* set

Creating a custom announcement set rather than simply changing the set received with the AUDIX set accomplishes two things: 1) you can identify this set as administrative so that the changes do not immediately impact the users; and 2) this prevents your changes from being replaced with a system upgrade.

The second page of the SYSTEM-PARAMETERS FEATURES form identifies the active and administrative announcement sets. Since you can make recorded changes only to the administrative announcement version, you must identify your custom set as administrative before making changes.

Make a copy of the announcement set you wish to change, as follows:

1. Enter `add annc -set new-annc-set-name`, where *new-annc-set-name* is the name that you wish to give to the new announcement set.
2. Enter `copy annc-set` to bring up the ANNOUNCEMENT SETS form.
3. Enter the name of the existing announcement set in the From Announcement Set field.
4. Enter the name that you gave to the new announcement set in the To Announcement Set field



The copy will take place over several minutes. The Admin Log indicates when finished using a “cpas” type log entry.

5. Enter `change system-parameters features` to bring up the SYSTEM PARAMETERS FEATURES form.
6. Enter the name of the new announcement set in the Administrative field on the second page of this form.

## Re-Recording a Fragment

There are at least two announcements you may want to change when you customize your DEFINITY AUDIX system:

- the default call answer greeting a caller hears when routed to a subscriber’s DEFINITY AUDIX mailbox
- the default voice mail greeting a subscriber hears when calling DEFINITY AUDIX directly.

However, the procedure for re-recording a fragment is the same for any announcement, as described below:

1. Using Appendix A, *Standard Announcements*, note the number of the announcement you want to change. This appendix lists each announcement by number, and the text and number of each fragment contained in the announcement. Then decide which fragment(s) you want to change for that announcement.
2. Using Appendix B, *Fragment/Announcement Cross-Reference*, verify that the fragment is used only in those announcement(s) that you expect to be affected by your changes.



the fragment because of how it would affect the rest of the announcements. In this instance, create a new fragment following the *Adding a Fragment to an Announcement* instructions in this chapter.

3. Use the SYSTEM PARAMETER FEATURES form to designate the correct announcements set that you plan to change as the administrative version.
4. Use the ANNOUNCEMENT form to verify that the announcement you plan to change is actually composed of the fragments you expect.
5. Use the SUBSCRIBER form to confirm that you have permission to change announcements (you must have `ay` in the Announcement Control field).
6. Use your touch-tone phone to log in to the DEFINITY AUDIX system.
7. At the activity menu press **(9)** (For security purposes, this option is not included in the voiced options you hear.) If you hear *Invalid entry. For help at any time, press star H*, you do not have . announcement control permission.
8. When you hear *To record names, press (4)*, *To play names, press (5)*, press **(1)** to change the fragment. (For security purposes, this option is not included in the voiced options you hear, but plays out if you press **(\*) (H)** for help.)
9. Enter the fragment ID as prompted and then **(#)**. For example, for f287, enter **(2)(8)(7)(#)**.
10. Enter the changed `fragment` when prompted. You can use all the normal voice mail editing capabilities on your touch-tone phone to make sure the new fragment is exactly how you want it to sound.
11. When you are satisfied with the recoding, press **(#)** to approve it.
12. Use the SYSTEM—PARAMEERSFEATURES form to designate the modified announcement set as the active version. If the active and administrative announcement versions are already the same, then both versions now contain the new fragment.

## Eliminating a Fragment from an Announcement

You may modify some announcements by simply eliminating an existing fragment from that specific announcement. For example, you could modify the default voice mail greeting (*Welcome to AUDIX. For help at anytime, press \*H*) to just say *For help at any time, press \*H*. by removing fragment f287 (*Welcome to AUDIX*) from the list of fragments that compose the announcement (in this case, announcement a815).

1. Using appendix B, note the number of the announcement you want to change.
2. Listen to the fragment to verify the fragment is the one you want to change.
3. Verify that the specified announcement set is designated as administrative on the SYSTEM PARAMETER FEATURE form.

4. Use the ANNOUNCEMENT form to eliminate the fragment from appearing in the announcement.
  - a. Enter the announcement set name in the Announcement Set field.
  - b. Enter the announcement ID in the Announcement ID field in this case a815.
  - c. Press **(Enter)** to display the fragment composition of the announcement. For this example, the fragment composition is f287, f97.
  - d. Replace f287 with f0 (f0 replaces f287 with silence) and press **(Enter)**.

Announcement a815 is now composed of fragments f0 and f97; Callers simply hear *For help at any time, press \*H*.

5. Use the SYSTEM-PARAMETERS FEATURE form to designate the modified announcement set as the active version. If the active and administrative announcement versions are the same, then both versions now contain the new fragment.

## Adding a Fragment to an Announcement

To change the contents of a fragment for specific announcement you must substitute an existing fragment or create a new fragment for the specific announcements you want to change. This leaves the old fragment intact for existing announcements that you want to remain unchanged.

For example, both announcement a812 and announcement a834 use fragment f87, *This call is experiencing difficulties*. If you want to change this fragment for announcement a812 only, you must create a new fragment to associate with announcement a812 in place of fragment f87. This leaves fragment f87 and its association with announcement a834 intact.

1. Using Appendix A, *Standard Announcements*, note the number of the fragments you want to change. Using Appendix B, *Fragment/Announcement Cross-Reference*, verify that the fragments are used only by announcements you expect to be affected by your changes.
2. Use the ANNOUNCEMENT form to verify that the announcement you plan to change is actually composed of the fragments you expect.
3. Use the SYSTEM-PARAMETERS FEATURE form to determine if an administrative announcement version is active.



You can record or re-record fragments only in the administrative announcement version. If there is an active announcement version **and** it is the version you want to change, make sure that it is also specified as the administrative version.

When you are sure that the correct copy of the announcement set is designated as the administrative version, go to the next step.

4. Use the SUBSCRIBER form to confirm that you have permission to change announcements, indicated by y in the Announcement Control field.

5. Use your touch-tone phone to log in to the DEFINITY AUDIX system.
6. At the activity menu, press **(9)** (For security purposes, this option is not included in the voiced options you hear.) If you hear *Entry not understood. Try again.*, you do not have announcement control permission.
7. When you hear *To record names, press 4. To play names, press 5*, press **(1)** to change fragments. (For security purposes, this option is not included in the voiced options you hear.)
8. Enter the new fragment ID as prompted; in this case enter an unused number such as f4000, for instance, **(4) (0) (0) (0) (#)**.



The fragment numbers 4000-4999 are reserved for customer use. Using other numbers could jeopardize the integrity of your custom fragments and announcements if these numbers are used for new fragments in later versions or updates to DEFINITY AUDIX.

9. Enter the fragment when prompted. For example, your new fragment might be *This call is experiencing difficulties and cannot continue at this time*. You can use all the normal voice mail editing capabilities on your touch-tone phone to make sure the new fragment is exactly the way you want it.
10. When you are satisfied with the new fragment press **(#)** to approve it.
11. Use the ANNOUNCEMENT form to add the new fragment in this case f4000, to announcement a812 in place of fragment f87.
  - a. Enter the announcement set name in the Announcement Set field.
  - b. Enter the announcement number, in this case a812, in the Announcement ID field.
  - c. Press **(Enter)** to display the numbers of the fragments that compose the announcement (fragment text does not display). To determine the text for each listed fragment, refer to Appendix B, *Announcement/Fragment Cross-Reference*. For this example, announcement a812, the fragment composition is as follows:
    - f87: This call is experiencing difficulties.
    - f1007: To playback, press 2-3.
  - d. Rewrite the fields to reflect the new composition in this case 4000,1007 and press **(Enter)**.  
Announcement a812 is now composed of the following fragments:
    - f4000: This call is experiencing difficulties and cannot continue at this time.
    - f1007: To playback, press 2-3.
 Meanwhile, announcement a834 still uses fragment f87 as before.
12. Use the SYSTEM\_PARAMETERS FEATURES form to designate the modified announcement set as the active version. If the active and administrative announcement versions are the same, then both versions now contain the new fragment.

As an alternative to the above example, you could also create a new fragment f4000 with *and cannot continue at this time* to use in addition to fragment f87 instead of replacing it in announcement a812.

Be careful when you make changes to announcements and fragments. There are several things you can do to ensure your modifications are correct. When in doubt, save the announcement sets **before** making changes to the fragments. Be sure you know which announcements contain the fragment you are about to change. This helps you to avoid inadvertently changing announcements you did not want to change.

After you make the change, test the change to make sure it is accurate. Be sure to record any changes you make into the appropriate appendix in this manual. Doing this saves you both time and confusion later if you make additional modifications.

## 3. Variables in Announcements

---

In the DEFINITY AUDIX system, some announcements are variable — in other words the contents of an announcement may change depending on changing times, dates, and/or subscriber inputs. Within system announcements, variables are always represented by a word or words in all capital letters. For example, announcement 110 (**a110**) is made up of fragment 663 (f663) and **DATE**:

```
f663 : Message waiting notification is not active and this message
has an expiration date of
<DATE>
```

**DATE** is the variable and will change according to the appropriate date.

Some announcements may have more than one variable. For instance, **a287** is

```
f47 : Call from
<NAME>
f262 : received
<TIME>
<DATE>
f86: extension
<BUTTONS >
```

**NAME** is the variable identifying the person who called. **TIME** is the variable time AUDIX received the call. **DATE** is the date AUDIX received the call. **BUTTONS** is the variable extension of the person who called.

In addition, some announcements may include different fragments at different times depending on whether or not certain conditions are met by the variable. Look at **a344**, for example.

```
f741: Private, priority message sent to
<NAME>
IF (NUMBER>0)
THEN
f2: and
<NUMBER>
IF (NUMBER==1)
THEN
f602: other
ELSE
f217: others
ENDIF
ENDIF
```

This announcement can state three different messages depending on the value of the variable **NUMBER**:

1. If the variable **NUMBER** is equal to 0, the announcement is:

```
f741: Private, priority message sent to  
<NAME>
```

2. If the variable **NUMBER** is equal to 1, the announcement is:

```
f741: Private, priority message sent to  
<NAME>  
f2: and  
<NUMBER>  
f602: other.
```

3. If the variable **NUMBER** is greater than 1, the announcement is:

```
f741: Private, priority message sent to  
<NAME>  
f2: and  
<NUMBER>  
f217: others.
```

Occasionally, you will see some announcements that call in other announcements in addition to the fragments they use. For example, many announcements call in a873, an announcement that determines the length of a message. This value is used in many announcement scenarios. However, rather than including this involved routine in every announcement that uses this value, it is written as a separate subroutine in a separate announcement. Then the announcements that use this value just call in a873 to determine message length — a process that actually saves a lot of system space.

## A. Standard Announcements

This appendix lists all of the announcements in the DEFINITY AUDIX announcement set for the Telecommunications Device for the Deaf (TDD), as well as the associated fragments and text.

announcement	Fragment and Text
a1	IF (NUMBER=0) THEN f776 THE SYSTEM GREETING ELSE NUMBER ENDIF f745 ACTIVE. f823 FOR ALL CALLS
a2	f936 PARTIAL ENTRY DELETED.
a3	(f350+NUMBER(3)) (f310=NUMBER(1)) a905(NUMBER(2))
a4	f46 TO ACCESS YOUR MAILBOX, DIAL STAR-R. f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO. f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.
a5	f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a6	f561 YOU ARE ADDRESSING YOUR MESSAGE. f285 TO ADD A MEMBER ENTER EXTENSION f224 AND POUND SIGN. f328 TO DELETE THE PREVIOUS ENTRY, DIAL STAR-D. TO ADD A MAILING LIST YOU HAVE ALREADY CREATED, OR A PUBLIC LIST OWNED BY OTHERS, DIAL STAR-L. TO REVIEW OR MODIFY THE LIST YOU ARE CREATING, DIAL STAR-1. TO APPROVE THE LIST YOU ARE CREATING AND MOVE ONTO THE NEXT STEP, DIAL POUND. f58 FOR NAME ADDRESSING, DIAL STAR-A.

Announcement	Fragment and Text
a7	f561 YOU ARE ADDRESSING YOUR MESSAGE. f286 TO ADD A MEMBER, ENTER LAST NAME f224 AND POUND SIGN. f328 TO DELETE THE PREVIOUS ENTRY, DIAL STAR-D. TO ADD A MAILING LIST YOU HAVE ALREADY CREATED, OR A PUBLIC LIST OWNED BY OTHERS, DIAL STAR-L. TO REVIEW OR MODIFY THE LIST YOU ARE CREATING, DIAL STAR-1. TO APPROVE THE LIST YOU ARE CREATING AND MOVE ONTO THE NEXT STEP, DIAL POUND. f148 FOR EXTENSION ADDRESSING, DIAL STAR-A.
a8	f46 TO ACCESS YOUR MAILBOX, DIAL STAR-R. f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.
a9	f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a10	f306 YOU ARE CHANGING YOUR PASSWORD. f212 PLEASE ENTER PASSWORD AGAIN FOR CONFIRMATION. TO DELETE THE PASSWORD YOU JUST ENTERED, DIAL STAR-D. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a11	f233 PREVIOUS LOGIN INCORRECT. PLEASE RE-ENTER EXTENSION f224 AND POUND SIGN.
a12	f233 PREVIOUS LOGIN INCORRECT. PLEASE RE-ENTER EXTENSION f224 AND POUND SIGN. f330 OR ENTER JUST THE POUND SIGN IF IT'S YOUR PHONE.
a13	f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.

Announcement	Fragment and Text
a14	f306 YOU ARE CHANGING YOUR PASSWORD. f210 PLEASE ENTER A NEW PASSWORD f224 AND POUND SIGN. f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a15	f555 TO ACCESS YOUR MAILBOX, DIAL STAR-R. f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO. f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a16	f306 YOU ARE CHANGING YOUR PASSWORD. f212 PLEASE ENTER PASSWORD AGAIN FOR CONFIRMATION. TO DELETE THE PASSWORD YOU JUST ENTERED, DIAL STAR-D. f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a17	f555 TO ACCESS YOUR MAILBOX, DIAL STAR-R. f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a18	f555 TO ACCESS YOUR MAILBOX, DIAL STAR-R. f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a19	f327 YOU ARE CREATING A MAILING LIST. f285 TO ADD A MEMBER, ENTER EXTENSION f224 AND POUND SIGN. f328 TO DELETE THE PREVIOUS ENTRY, DIAL STAR-D. TO ADD A MAILING LIST YOU HAVE ALREADY CREATED, OR A PUBLIC LIST OWNED BY OTHERS, DIAL STAR-L. TO REVIEW OR MODIFY THE LIST YOU ARE CREATING, DIAL STAR-I. TO APPROVE THE LIST YOU ARE CREATING AND MOVE ONTO THE NEXT STEP, DIAL POUND. f58 FOR NAME ADDRESSING, DIAL STAR-A. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.

Announcement	Fragment and Text
a20	<p>f327 YOU ARE CREATING A MAILING LIST.                      f286 TO ADD A MEMBER, ENTER LAST NAME                      f224 AND POUND SIGN.                      f328 TO DELETE THE PREVIOUS ENTRY, DIAL STAR-D. TO ADD A MAILING LIST YOU HAVE ALREADY CREATED, OR A PUBLIC LIST OWNED BY OTHERS, DIAL STAR-L. TO REVIEW OR MODIFY THE LIST YOU ARE CREATING, DIAL STAR-1. TO APPROVE THE LIST YOU ARE CREATING AND MOVE ONTO THE NEXT STEP, DIAL POUND.                      f148 FOR EXTENSION ADDRESSING, DIAL STAR-A.                      f235 TO RESTART AT THE ACTIVITYMENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.                      f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a21	<p>f821 YOU ARE ADMINISTERING CALL TYPES.</p>
a22	<p>f821 YOU ARE ADMINISTERING CALL TYPES.                      f798 PRIME TIME IS                          TIME                      f524 TO                          TIME (2)                      f788 TO IDENTIFY CALLS AS OUT-OF-HOURS, DIAL 3.                      f789 OTHERWISE, DIAL 4.</p>
a23	<p>f821 YOU ARE ADMINISTERING CALL TYPES.                      f785 SAME GREETING USED FOR ALL CALLS.                      f786 TO IDENTIFY CALLS AS INTERNAL AND EXTERNAL, DIAL 1.                      f787 TO IDENTIFY CALLS AS BUSY AND NO-ANSWER, DIAL 2.</p>

Announcement	Fragment and Text
a24	<p>f503 YOU ARE ADMINISTERING YOUR ATTENDANT MENU.</p> <p>f502 TO RECORD ATTENDANT MENU, DIAL 1. TO PLAY BACK ATTENDANT MENU, DIAL ZERO.</p> <p>f550 TO REWIND YOUR ATTENDANT MENU, DIAL 2. TO DELETE IT, DIAL STAR-D. TO STOP PLAYBACK OF YOUR ATTENDANT MENU, DIAL 3</p> <p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMAND S.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f235 TO RESTART AT THE ACTIVITYMENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a25	<p>f373 YOU ARE CHOOSING WHETHER TO INCLUDE ORIGINAL MESSAGE WITH YOUR REPLY. TO INCLUDE THE ORIGINAL, DIAL "Y" FOR YES. TO SEND ONLY YOUR REPLY, DIAL 'N' FOR NO.</p> <p>f235 TO RESTART AT THE ACTIVITYMENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a26	<p>f299 YOU ARE ADMINISTERING YOUR GREETING.</p> <p>f5 TO RECORD PERSONAL GREETING, DIAL 1. TO SEE PERSONAL GREETING, DIAL ZERO. TO SELECT WHICH GREETING TO USE, DIAL STAR-POUND.</p> <p>f39 TO DELETE, DIAL STAR-D. TO STOP PLAYBACK, DIAL 3.</p> <p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a27	f46 TO ACCESS YOUR MAILBOX, DIAL STAR-R.
a28	<p>f529 YOU ARE CHANGING YOUR OUTCALLING OPTIONS.</p> <p>f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.</p> <p>f527 TO CHANGE NUMBER DIAL 1. TO CHANGE TIMES, DIAL 2. FOR INSTRUCTIONS ON ENTERING YOUR OUTCALLING NUMBER DIAL 3.</p> <p>f528 TO TURN ON, DIAL "Y". TO TURN OFF, DIAL "N".</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a29	<p>f347 YOU ARE ADDING A LIST.</p> <p>f111 PLEASE ENTER LIST ID</p> <p>f224 AND POUND SIGN.</p> <p>f366 TO SPECIFY A DIFFERENT OWNER BY EXTENSION, DIAL STAR-D.</p> <p>f363 TO APPROVE THE LIST YOU ARE CREATING, DIAL POUND.</p>

Announcement	Fragment and Text
a30	<p>f302 YOU ARE RECORDING ANNOUNCEMENT FRAGMENTS. ENTER FRAGMENT ID FOLLOWED BY POUND SIGN. REFER TO ADMIN MANUAL FOR CORRECT ID.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a31	<p>f347 YOU ARE ADDING A LIST.</p> <p>f111 PLEASE ENTER LIST ID</p> <p>f224 AND POUND SIGN.</p> <p>f367 TO SPECIFY A DIFFERENT OWNER BY NAME, DIAL STAR-D.</p> <p>f363 TO APPROVE THE LIST YOU ARE CREATING, DIAL POUND.</p>
a32	<p>f303 YOU ARE RECORDING NAMES. ENTER EXTENSION</p> <p>f224 AND POUND SIGN.</p> <p>f235 TO RESTART AT THE ACTIVITYMENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>F282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a33	<p>f382 YOU ARE SCHEDULING YOUR MESSAGE FOR DELIVERY.</p> <p>f341 ENTER THE NUMBER OF THE MONTH, ONE THROUGH TWELVE, THEN TWO DIGITS FOR THE DAY OF THE MONTH, THEN THE POUND SIGN.</p> <p>f487 TO DELETE TIME, DIAL STAR-D. TO DEFAULT REST OF THE DELIVERY TIME, DIAL POUND.</p>
a34	<p>f108 YOU ARE RECORDING A MESSAGE.</p> <p>f167 TO APPROVE, DIAL POUND. TO RECORD FROM HERE, DIAL 1.773 PLAY BACK DIAL 2-3.</p> <p>f389 TO DELETE, DIAL STAR-D.</p> <p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>F292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p>

Announcement	Fragment and Text
a35	f816 YOU ARE PLAYING BACK A PERSONAL GREETING. f753 ENTER GREETING NUMBER. f913 IF FINISHED, DIAL POUND.
a36	f817 YOU ARE RECORDING A PERSONAL GREETING. f753 ENTER GREETING NUMBER. f913 IF FINISHED, DIAL POUND.
a37	f820 YOU ARE SELECTING WHICH GREETING TO ACTIVATE.
a38	f368 YOU ARE ENTERING THE NUMBER FOR A NEW LIST. PLEASE ENTER A NUMBER UP TO SIX DIGITS LONG f224 AND POUND SIGN. f369 TO REPLACE AN EXISTING LIST, ENTER THAT LIST'S NUMBER, f224 AND POUND SIGN. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a39	f358 YOU ARE IDENTIFYING A LIST AS PRIVATE OR PUBLIC. f14 TO MAKE PRIVATE, DIAL 1. TO MAKE PUBLIC, DIAL 2. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.

Announcement	Fragment and Text
a40	<p>f370 THESE ARE ENTRIES IN YOUR LIST.</p> <p>f294 TO ADD ENTRIES, DIAL 1.</p> <p>f371 TO REWIND TO CURRENT ENTRY, DIAL 2. TO REWIND TO PREVIOUS ENTRIES, DIAL 2 AS MANY TIMES AS NECESSARY. TO CONTINUE PLAYBACK OF LIST, DIAL 3.</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE “HEARING” AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE “HEARING” YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f372 TO SKIP TO NEXT ENTRY, DIAL POUND. TO DELETE CURRENT ENTRY, DIAL STAR-D.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a41	<p>f360 YOU ARE SCANNING MAILING LISTS. TO REVIEW LIST MEMBERS, DIAL ZERO. TO REWIND TO PREVIOUS LIST, DIAL 2. TO CONTINUE SCANNING LISTS, DIAL 3.</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE “HEARING” AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE “HEARING” YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f361 TO SKIP TO NEXT LIST, DIAL POUND. TO DELETE LIST, DIAL STAR-D.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a42	<p>f587 YOU ARE REVIEWING A LIST.</p> <p>f586 TO SKIP, DIAL POUND.</p> <p>f371 TO REWIND TO CURRENT ENTRY, DIAL 2. TO REWIND TO PREVIOUS ENTRIES, DIAL 2 AS MANY TIMES AS NECESSARY. TO CONTINUE PLAYBACK OF LIST, DIAL 3.</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE “HEARING” AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE “HEARING” YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a43	<p>f359 YOU ARE CHANGING THE STATUS OF YOUR LIST. TO MODIFY STATUS, DIAL “Y” FOR YES OR “N” FOR NO.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a44	<p>f370 THESE ARE ENTRIES IN YOUR LIST.</p> <p>f333 TO ADD ENTRIES TO THE LIST OR TO CHANGE STATUS OF LIST, DIAL 1.</p> <p>f371 TO REWIND TO CURRENT ENTRY, DIAL 2. TO REWIND TO PREVIOUS ENTRIES, DIAL 2 AS MANY TIMES AS NECESSARY. TO CONTINUE PLAYBACK OF LIST, DIAL 3.</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f372 TO SKIP TO NEXT ENTRY, DIAL POUND. TO DELETE CURRENT ENTRY, DIAL STAR-D.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a45	<p>f327 YOU ARE CREATING A MAILING LIST.</p> <p>f329 YOU HAVE NOT YET ENTERED ENOUGH CHARACTERS TO IDENTIFY A SPECIFIC SUBSCRIBER. TO ENTER THE LETTER Q, DIAL 7. FOR Z, DIAL 9.</p> <p>f484 ENTER MORE CHARACTERS FOLLOWED BY THE POUND SIGN. IF YOU JUST COMPLETED ENTERING THE LAST NAME, ENTER THE FIRST NAME.</p> <p>f225 AND POUND SIGN.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a46	f815 YOU ARE ADMINISTERING YOUR PERSONAL GREETINGS.

Announcement	Fragment and Text
a47	<p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE “HEARING” AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE “HEARING” YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p>
a48	<p>f549 YOU ARE ADMINISTERING YOUR ATTENDANT MENU. TO CREATE ATTENDANT MENU, DIAL 1.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a49	<p>f108 YOU ARE RECORDING A MESSAGE.</p> <p>f13 TO RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN.</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4.(USEFUL IF YOUR TDD IS HAVING TROUBLE “HEARING” AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE “HEARING” YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p>
a50	<p>f299 YOU ARE ADMINISTERING YOUR GREETING.</p> <p>f36 TO RECORD A PERSONAL GREETING, DIAL 1.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a51	<p>f306 YOU ARE CHANGING YOUR PASSWORD.</p> <p>f210 PLEASE ENTER A NEW PASSWORD</p> <p>f224 AND POUND SIGN.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a52	f591 TO CHANGE YOUR OUTCALLING PHONE NUMBER DIAL 1. TO SEE FURTHER INSTRUCTIONS ON PROGRAMMING A PAGER, DIAL "Y". TO RETURN TO OUTCALLING ADMINISTRATION, DIAL "N."
a53	f566 YOU ARE RESPONDING TO AN OUTCALL NOTIFYING YOU OF NEW MESSAGES. f551 TO ACCESS YOUR MESSAGES, f278 PLEASE ENTER EXTENSION f224 AND POUND SIGN. f543 TO AVOID FURTHER NOTIFICATION OF THESE MESSAGES, DIAL STAR-POUND. f567 EITHER LOGGING IN OR DIALING STAR-POUND WILL RESULT IN THE OUTCALL BEING CANCELED FOR THE NEW MESSAGES CURRENTLY IN YOUR MAILBOX. IF ADDITIONAL NEW MESSAGES ARRIVE, ANOTHER OUTCALL WILL BE SCHEDULED.
a54	f347 YOU ARE ADDING A LIST. f362 IF YOU OWN THE LIST, DIAL POUND. IF SOMEONE ELSE OWNS THE LIST f364 ENTER OWNER'S EXTENSION f224 AND POUND SIGN. f298 TO SPECIFY OWNER BY NAME, DIAL STAR-A.
a55	f347 YOU ARE ADDING A LIST. f362 IF YOU OWN THE LIST, DIAL POUND. IF SOMEONE ELSE OWNS THE LIST f365 ENTER OWNER'S NAME f224 AND POUND SIGN. f297 TO SPECIFY OWNER BY EXTENSION, DIAL STAR-A.
a56	f220 ENTER PASSWORD f224 AND POUND SIGN.
a57	f307 YOU ARE PLAYING ANNOUNCEMENTS. f221 ENTER ANNOUNCEMENT ID AND POUND SIGN. REFER TO ADMIN MANUAL FOR CORRECT ID. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.

Announcement	Fragment and Text
a58	<p>f308 YOU ARE PLAYING ANNOUNCEMENT FRAGMENTS.</p> <p>f222 ENTER FRAGMENT ID AND POUND SIGN. REFER TO ADMIN MANUAL FOR CORRECT ID.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a59	<p>f309 YOU ARE PLAYING NAMES.</p> <p>f223 PLEASE ENTER EXTENSION</p> <p>f224 AND POUND SIGN.</p> <p>f235 TO RESTART AT THE ACTIVITY MEW, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a60	<p>f278 PLEASE ENTER EXTENSION</p> <p>f224 AND POUND SIGN.</p>
a61	<p>f357 YOU ARE CHOOSING BETWEEN SUBSCRIBERS WHOSE NAMES MATCH YOUR ENTRY. TO INDICATE NO SUBSCRIBERS MATCH, DELETE ENTRY BY DIALING STAR-D. TO CHANGE TO EXTENSION ADDRESSING AND DELETE YOUR ENTRY, DIAL STAR-A.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a62	f323 YOU ARE RESPONDING TO A PIECE OF INCOMING MAIL. f486 TO REPLY TO SENDER BY MAIL, DIAL 1. f 4 1 TO FORWARD MESSAGE WITH COMMENT AT BEGINNING, DIAL 2. f126 TO FORWARD MESSAGE WITH COMMENT AT END, DIAL 3. f8 TO RECORD A NEW MESSAGE, DIAL 4. f1434 TO RETURN TO GETTING MESSAGES, DIAL POUND. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a63	f348 YOU ARE SPECIFYING A MAILING LIST TO REVIEW. f111 PLEASE ENTER LIST ID f224 AND POUND SIGN. f366 TO SPECIFY A DIFFERENT OWNER BY EXTENSION, DIAL STAR-D. f363 TO APPROVE THE LIST YOU ARE CREATING, DIAL POUND. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a64	f348 YOU ARE SPECIFYING A MAILING LIST TO REVIEW. f111 PLEASE ENTER LIST ID f224 AND POUND SIGN. f367 TO SPECIFY A DIFFERENTOWNER BY NAME, DIAL STAR-D. f363 TO APPROVE THE LIST YOU ARE CREATING, DIAL POUND. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.

Announcement	Fragment and Text
a65	<p>f348 YOU ARE SPECIFYING A MAILING LIST TO REVIEW.</p> <p>f362 IF YOU OWN THE LIST, DIAL POUND. IF SOMEONE ELSE OWNS THE LIST</p> <p>f364 ENTER OWNER'S EXTENSION</p> <p>f224 AND POUND SIGN.</p> <p>f298 TO SPECIFY OWNER BY NAME, DIAL STAR-A.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a66	<p>f348 YOU ARE SPECIFYING A MAILING LIST TO REVIEW.</p> <p>f362 IF YOU OWN THE LIST, DIAL POUND. IF SOMEONE ELSE OWNS THE LIST</p> <p>f365 ENTER OWNER'S NAME</p> <p>f224 AND POUND SIGN.</p> <p>f297 TO SPECIFY OWNER BY EXTENSION, DIAL STAR-A.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a67	<p>f348 YOU ARE SPECIFYING A MAILING LIST TO REVIEW.</p> <p>f329 YOU HAVE NOT YET ENTERED ENOUGH CHARACTERS TO IDENTIFY A SPECIFIC SUBSCRIBER. TO ENTER THE LETTER Q, DIAL 7. FOR Z, DIAL 9.</p> <p>f484 ENTER MORE CHARACTERS FOLLOWED BY THE POUND SIGN. IF YOU JUST COMPLETED ENTERING THE LAST NAME, ENTER THE FIRST NAME.</p> <p>f225 AND POUND SIGN.</p> <p>f148 FOR EXTENSION ADDRESSING, DIAL STAR-A.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a68	<p>f518 YOU ARE CREATING A TDD MESSAGE THAT WILL BE DELIVERED TO THE PERSON SPECIFIED IN YOUR MESSAGE AS SOON AS POSSIBLE. PLEASE BE AWARE THAT, IN ORDER TO FORWARD THIS MESSAGE TO THE RECIPIENT, SOMEONE WILL HAVE TO PLAY BACK THE NAME AND NUMBER PORTION.</p> <p>f13 TO RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN.</p> <p>f304 TO PLAY BACK MESSAGE, DIAL 2-3. TO DELETE YOUR MESSAGE, DIAL STAR-D. TO APPROVE YOUR MESSAGE, DIAL POUND.</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f46 TO ACCESS YOUR MAILBOX, DIAL STAR-R.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a69	<p>f517 YOU ARE ENTERING THE NUMBER OF THE PERSON FOR WHOM YOU ARE LEAVING A MESSAGE. THIS MAYBE THE COMPLETE NUMBER YOU DIALED OR SIMPLY THE EXTENSION. FOR A FASTER RESPONSE, TERMINATE YOUR ENTRY WITH A POUND SIGN.</p> <p>f46 TO ACCESS YOUR MAILBOX, DIAL STAR-R.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT' AUDIX, DIAL STAR-STAR-X.</p> <p>f516 O LEAVE A MESSAGE THAT WILL BE DELIVERED AS SOON AS POSSIBLE,</p> <p>f380 PLEASE WAIT.</p>

Announcement	Fragment and Text
a70	<p>f517 YOU ARE ENTERING THE NUMBER OF THE PERSON FOR WHOM YOU ARE LEAVING A MESSAGE. THIS MAYBE THE COMPLETE NUMBER YOU DIALED OR SIMPLY THE EXTENSION. FOR A FASTER RESPONSE, TERMINATE YOUR ENTRY WITH A POUND SIGN.</p> <p>f46 TO ACCESS YOUR MAILBOX, DIAL STAR-R.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p> <p>f274 PLEASE MAKE ENTRY SOON, OR BE DISCONNECTED.</p>
a71	<p>f517 YOU ARE ENTERING THE NUMBER OF THE PERSON FOR WHOM YOU ARE LEAVING A MESSAGE. THIS MAYBE THE COMPLETE NUMBER YOU DIALED OR SIMPLY THE EXTENSION. FOR A FASTER RESPONSE, TERMINATE YOUR ENTRY WITH A POUND SIGN.</p> <p>f46 TO ACCESS YOUR MAILBOX, DIAL STAR-R.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p> <p>f515 TO BE TRANSFERRED TO AN OPERATOR,</p> <p>f380 PLEASE WAIT.</p>

Announcement	Fragment and Text
a72	<p>f375 YOU ARE GETTING YOUR INCOMING MESSAGES. TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RESPOND TO THE MESSAGE, DIAL 1.</p> <p>f376 TO SKIP TO THE NEXT HEADER, DIAL THE POUND SIGN. TO PLAY BACK THE HEADER, REWIND BY DIALING 2, THEN PLAY BY DIALING 3. TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.</p> <p>f577 TO HOLD THE MESSAGE IN ITS CURRENT CATEGORY, DIAL STAR-STAR-H.</p> <p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f377 TO DELETE MESSAGE DIAL STAR-D.</p>
a73	<p>f378 YOU ARE CHECKING THE STATUS OF YOUR OUTGOING MESSAGES.</p> <p>f474 TO PLAY BACK, DIAL ZERO. TO CHANGE OR SEND AGAIN, DIAL 1.</p> <p>f376 TO SKIP TO THE NEXT HEADER, DIAL THE POUND SIGN. TO PLAY BACK THE HEADER, REWIND BY DIALING 2, THEN PLAY BY DIALING 3. TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.</p> <p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f377 TO DELETE MESSAGE DIAL STAR-D.</p>

Announcement	Fragment and Text
a74	<p>f819 YOU ARE SCANNING YOUR PERSONAL GREETINGS.  f781 TO SKIP TO THE NEXT GREETING, DIAL THE POUND SIGN.  f756 TO SEE GREETING  NUMBER  f760 DIAL ZERO.  f758 TO DELETE, DIAL STAR-D.  f839 TO REWIND TO THE PREVIOUS GREETING, DIAL 2.  f707 IF FINISHED, DIAL STAR-POUND.  f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)  f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p>
a75	<p>f385 TO APPROVE DELIVERY TIME, DIAL POUND. TO MODIFY DELIVERY TIME, DIAL STAR-D AND WAIT FOR FURTHER INSTRUCTIONS.</p>
a76	<p>f305 YOU ARE AT THE ACITVITY MENU.  f983 TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2.70 RECORD OR CHANGE THE TDD GREETING SEEN BY CALLERS, DIAL 3.  f48 TO CHECK YOUR OUTGOING MESSAGES, DIAL 4. TO ADMINISTER MAILING LISTS, PERSONAL DIRECTORY, PASSWORD, OR ACCOUNT NAME, DIAL 5. TO CHANGE OUTCALLING INFORMATION, DIAL 6. TO SCAN INCOMING MESSAGES AU'SOMATICALLY, DIAL 7. TORE-LOGON, DIAL STAR-STAR-R.  f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a77	<p>f305 YOU ARE AT THE ACTIVITY MENU</p> <p>F984 TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO ADMINISTER ATTENDANT MENU, DIAL 3.</p> <p>f48 TO CHECK YOUR OUTGOING MESSAGES, DIAL 4. TO ADMINISTER MAILING LISTS, PERSONAL DIRECTORY, PASSWORD, OR ACCOUNT NAME, DIAL 5. TO CHANGE OUTCALLING INFORMATION, DIAL 6. TO SCAN INCOMING MESSAGES AUTOMATICALLY, DIAL 7. TO RE-LOGON, DIAL STAR-STAR-R.</p> <p>F291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a78	<p>f324 YOU ARE SELECTING WHICH GREETING WILL BE PLAYED TO CALLERS. IF YOU WANT YOUR PERSONAL GREETING TO BE PLAYED, DIAL "Y" FOR YES. IF YOU DIAL "N" FOR NO, THE SYSTEM GREETING WILL BE USED.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a79	<p>f536 YOU ARE SPECIFYING YOUR OUTCALLING TIME PERIOD. THE TIME YOU SPECIFY WILL BE RESTRICTED BY THE TIMES ALLOWED BY THE SYSTEM ADMINISTRATOR</p> <p>f545 TO DELETE OWN TIME, DIAL STAR-D.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a80	<p>f536 YOU ARE SPECIFYING YOUR OUTCALLING TIME PERIOD. THE TIME YOU SPECIFY WILL BE RESTRICTED BY THE TIMES ALLOWED BY THE SYSTEM ADMINISTRATOR</p> <p>f535 FOR OUTCALLING ANY TIME, DIAL 1. FOR OUTCALLING DURING PRIME TIME, DIAL 2. TO SPECIFY YOUR TIMES, DIAL 3. FOR SYSTEM OUTCALLING SCHEDULE, DIAL 4.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>fl17 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a81	<p>f378 YOU ARE CHECKING THE STATUS OF YOUR OUTGOING MESSAGES.</p> <p>f376 TO SKIP TO THE NEXT HEADER, DIAL THE POUND SIGN. TO PLAY BACK THE HEADER, REWIND BY DIALING 2, THEN PLAY BY DIALING 3. TO SKIP TO THE NEXT' CATEGORY, DIAL STAR-POUND.</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f379 TO DELETE STATUS INFORMATION, DIAL STAR-D.</p>
a82	<p>f374 YOU ARE CHOOSING WHETHER TO FILE THIS MESSAGE. TO FILE A COPY, DIAL "Y" FOR YES. TO SEND WITHOUT FILING A COPY, DIAL "N" FOR NO.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a83	<p>f326 YOU ARE DOING SYSTEM ADMINISTRATION. TO RECORD NAMES, DIAL 4. TO PLAY NAMES, DIAL 5. TO RECORD A MACHINE NAME, DIAL 6. TO PLAY A MACHINE NAME, DIAL 7. TO RECORD FRAGMENTS, DIAL 1. TO PLAY FRAGMENTS, DIAL 2. TO PLAY ANNOUNCEMENTS, DIAL 3.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a84	<p>f382 YOU ARE SCHEDULING YOUR MESSAGE FOR DELIVERY.</p> <p>f488 TO SPECIFY IMMEDIATE DELIVERY, DIAL POUND. OTHERWISE</p> <p>f340 ENTER THE HOUR, ONE THROUGH TWELVE, THEN TWO DIGITS FOR THE MINUTES, THEN "A" FOR AM OR "P" FOR PM, AND THE POUND SIGN.</p>
a85	<p>f323 YOU ARE RESPONDING TO A PIECE OF INCOMING MAIL.</p> <p>f486 TO REPLY TO SENDER BY MAIL, DIAL 1.</p> <p>f41 TO FORWARD MESSAGE WITH COMMENT AT BEGINNING, DIAL 2.</p> <p>f126 TO FORWARD MESSAGE WITH COMMENT AT END, DIAL 3.</p> <p>f8 TO RECORD A NEW MESSAGE, DIAL 4.</p> <p>f163 TO CALL SENDER, DIAL ZERO.</p> <p>f1434 TO RETURN TO GETTING MESSAGES, DIAL POUND.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a86	<p>f378 YOU ARE CHECKING THE STATUS OF YOUR OUTGOING MESSAGES.                      f381 TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RE-RECORD MESSAGE BEFORE DELIVERY, DIAL 1.                      f376 TO SKIP TO THE NEXT HEADER, DIAL THE POUND SIGN. TO PLAY BACK THE HEADER REWIND BY DIALING 2, THEN PLAY BY DIALING 3. TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.                      f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)                      f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.                      f377 TO DELETE MESSAGE, DIAL STAR-D.</p>
a87	<p>f278 PLEASE ENTER EXTENSION                      f224 AND POUND SIGN.                      f330 OR ENTER JUST THE POUND SIGN IF IT'S YOUR PHONE.</p>
a88	<p>f818 YOU HAVE JUST RECORDED                      f7S4 GREETING                      NUMBER                      f766 TO USE THIS GREETING FOR ALL CALLS, DIAL 1.                      f913 IF FINISHED, DIAL POUND.</p>
a89	<p>f818 YOU HAVE JUST RECORDED                      f754 GREETING                      NUMBER                      f767 TO USE THIS GREETING FOR ALL CALLS, DIAL ZERO. FOR BUSY CALLS, DIAL 1. FOR NO-ANSWER CALLS, DIAL 2.</p>
a90	<p>f384 PLEASE ENTER NUMBER OF MONTH, THEN TWO DIGITS FOR DAY, AND POUND SIGN.</p>
a91	<p>f818 YOU HAVE JUST RECORDED                      f754 GREETING                      NUMBER                      f764 TO USE THIS GREETING FOR ALL CALLS, DIAL ZERO. FOR INTERNAL CALLS, DIAL 1. FOR EXTERNAL CALLS, DIAL 2.</p>

Announcement	Fragment and Text
a92	f910 YOU ARE ATTEMPTING TO PLAY AN ANNOUNCEMENT THAT NEEDS ADDITIONAL INPUT BEFORE IT CAN BE PLAYED. f384 PLEASE ENTER NUMBER OF MONTH, THEN TWO DIGITS FOR DAY, AND POUND SIGN.
a93	f307 YOU ARE PLAYING ANNOUNCEMENTS. f254 TO PLAY THE ACTIVE VERSION, DIAL 1. f338 TO PLAY THE ADMIN VERSION, DIAL 2. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a94	f308 YOU ARE PLAYING ANNOUNCEMENT FRAGMENTS. f254 TO PLAY THE ACTIVE VERSION, DIAL 1. f338 TO PLAY THE ADMIN VERSION, DIAL 2. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a95	f309 YOU ARE PLAYING NAMES. f279 ENTER ANNOUNCEMENT SET AND POUND SIGN. f280 FOR ADMIN VERSION, DIAL 2. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.

Announcement	Fragment and Text
a96	<p>f503 YOU ARE ADMINISTERING YOUR ATTENDANT MENU.</p> <p>f502 TO RECORD ATTENDANT MENU, DIAL 1.70 PLAY BACK ATTENDANT MENU, DIAL ZERO.</p> <p>f550 TO REWIND YOUR ATTENDANT MENU, DIAL 2. TO DELETE IT, DIAL STAR-D. TO STOP PLAYBACK OF YOUR ATTENDANT MENU, DIAL 3.</p> <p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a97	<p>f529 YOU ARE CHANGING YOUR OUTCALLING OPTIONS.</p> <p>f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.</p> <p>f527 TO CHANGE NUMBER DIAL 1. TO CHANGE TIMES, DIAL 2. FOR INSTRUCTIONS ON ENTERING YOUR OUTCALLING NUMBER, DIAL 3.</p> <p>f528 O TURN ON, DIAL "Y". TO TURN OFF, DIAL "N.</p> <p>f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a98	<p>f11 YOU ARE RECORDING MACHINE NAMES.</p> <p>f6 ENTER MACHINE IDENTIFICATION.</p> <p>f224 AND POUND SIGN.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a99	<p>f549 YOU ARE ADMINISTERING YOUR ATTENDANT MENU. TO CREATE ATTENDANT MENU, DIAL 1.</p> <p>f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a100	<p>f138 YOU ARE REVIEWING MACHINE NAMES.</p> <p>f6 ENTER MACHINE IDENTIFICATION.</p> <p>f224 AND POUND SIGN.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT' AUDIX, DIAL STAR-STAR-X.</p>
a101	<p>f518 YOU ARE CREATING A TDD MESSAGE THAT WILL BE DELIVERED TO THE PERSON SPECIFIED IN YOUR MESSAGE AS SOON AS POSSIBLE. PLEASE BE AWARE THAT, IN ORDER TO FORWARD THIS MESSAGE TO THE RECIPIENT, SOMEONE WILL HAVE TO PLAY BACK THE NAME AND NUMBER PORTION.</p> <p>f13 TO RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN.</p> <p>f304 TO PLAY BACK MESSAGE, DIAL 2-3. TO DELETE YOUR MESSAGE, DIAL STAR-D. TO APPROVE YOUR MESSAGE, DIAL POUND.</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f555 TO ACCESS YOUR MAILBOX, DIAL STAR-R.</p> <p>F282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a102	<p>f517 YOU ARE ENTERING THE NUMBER OF THE PERSON FOR WHOM YOU ARE LEAVING A MESSAGE. THIS MAYBE THE COMPLETE NUMBER YOU DIALED OR SIMPLY THE EXTENSION. FOR A FASTER RESPONSE, TERMINATE YOUR ENTRY WITH A POUND SIGN.</p> <p>f555 TO ACCESS YOUR MAILBOX, DIAL STAR-R.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p> <p>f516 TO LEAVE A MESSAGE THAT WILL BE DELIVERED AS SOON AS POSSIBLE,</p> <p>f380 PLEASE WAIT.</p>
a103	<p>f517 YOU ARE ENTERING THE NUMBER OF THE PERSON FOR WHOM YOU ARE LEAVING A MESSAGE. THIS MAYBE THE COMPLETE NUMBER YOU DIALED OR SIMPLY THE EXTENSION. FOR A FASTER RESPONSE, TERMINATE YOUR ENTRY WITH A POUND SIGN.</p> <p>f555 TO ACCESS YOUR MAILBOX, DIAL STAR-R.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p> <p>f274 PLEASE MAKE ENTRY SOON, OR BE DISCONNECTED.</p>
a104	<p>f517 YOU ARE ENTERING THE NUMBER OF THE PERSON FOR WHOM YOU ARE LEAVING A MESSAGE. THIS MAYBE THE COMPLETE NUMBER YOU DIALED OR SIMPLY THE EXTENSION. FOR A FASTER RESPONSE, TERMINATE YOUR ENTRY WITH A POUND SIGN.</p> <p>f555 TO ACCESS YOUR MAILBOX, DIAL STAR-R.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p> <p>f515 TO BE TRANSFERRED TO AN OPERATOR,</p> <p>f380 PLEASE WAIT.</p>
a105	<p>f536 YOU ARE SPECIFYING YOUR OUTCALLING TIME PERIOD. THE TIME YOU SPECIFY WILL BE RESTRICTED BY THE TIMES ALLOWED BY THE SYSTEM ADMINISTRATOR.</p> <p>f545 TO DELETE OWN TIME DIAL STAR-D.</p> <p>f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a106	<p>f536 YOU ARE SPECIFYING YOUR OUTCALLING TIME PERIOD. THE TIME YOU SPECIFY WILL BE RESTRICTED BY THE TIMES ALLOWED BY THE SYSTEM ADMINISTRATOR</p> <p>f535 FOR OUTCALLING ANY TIME, DIAL 1. FOR OUTCALLING DURING PRIME TIME, DIAL 2. TO SPECIFY YOUR TIMES, DIAL 3. FOR SYSTEM OUTCALLING SCHEDULE, DIAL 4.</p> <p>f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a107	<p>f138 YOU ARE REVIEWING MACHINE NAMES.</p> <p>f279 ENTER ANNOUNCEMENT SET AND POUND SIGN.</p> <p>f280 FOR ADMIN VERSION, DIAL 2.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a108	<p>f529 YOU ARE CHANGING YOUR OUTCALLING OPTIONS.</p> <p>f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.</p> <p>f527 TO CHANGE NUMBER, DIAL 1. TO CHANGE TIMES, DIAL 2. FOR INSTRUCTIONS ON ENTERING YOUR OUTCALLING NUMBER, DIAL 3.</p> <p>f528 TO TURN ON,, DIAL "Y". TO TURN OFF, DIAL "N".</p> <p>f135 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a109	<p>f669 WITH THE CURRENT SETTINGS, THIS LOGIN ANNOUNCEMENT WILL BE INTERRUPTIBLE AND THE LOGIN ANNOUNCEMENT HAS AN EXPIRATION DATE OF DATE</p>
al 10	<p>f663 MESSAGE WAITING NOTIFICATION IS NOT ACTIVE AND THIS MESSAGE HAS AN EXPIRATION DATE OF DATE</p>

Announcement	Fragment and Text
a111	f668 WITH THE CURRENT SETTINGS, THIS LOGIN ANNOUNCEMENT WILL BE NON-INTERRUPTIBLE AND THE LOGIN ANNOUNCEMENT HAS AN EXPIRATION DATE OF DATE
al12	f664 MESSAGE WAITING NOTIFICATION IS ACTIVE AND THIS MESSAGE HAS AN EXPIRATION DATE OF DATE
al13	<p>f305 YOU ARE AT THE ACTIVITY MENU.</p> <p>f23 TO RECORD MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO ADMINISTER YOUR GREETING, DIAL 3.</p> <p>f48 TO CHECK YOUR OUTGOING MESSAGES, DIAL 4. TO ADMINISTER MAILING LISTS, PERSONAL DIRECTORY, PASSWORD, OR ACCOUNT NAME DIAL 5. TO CHANGE OUTCALLING INFORMATION, DIAL 6. TO SCAN INCOMING MESSAGES AUTOMATICALLY, DIAL 7. TO RE-LOGON, DIAL STAR-STAR-R.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
al14	<p>f305 YOU ARE AT THE ACTIVITY MENU.</p> <p>f984 TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO ADMINISTER ATTENDANT MENU, DIAL 3.</p> <p>f48 TO CHECK YOUR OUTGOING MESSAGES, DIAL 4. TO ADMINISTER MAILING LISTS, PERSONAL DIRECTORY, PASSWORD, OR ACCOUNT NAME DIAL 5. TO CHANGE OUTCALLING INFORMATION, DIAL 6. TO SCAN INCOMING MESSAGES AUTOMATICALLY, DIAL 7. TO RE-LOGON, DIAL STAR-STAR-R.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
al15	<p>f305 YOU ARE AT THE ACTIVITY MENU.</p> <p>f986 TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO RECORD OR CHANGE THE TDD GREETINGS SEEN BY CALLERS, DIAL 3.</p> <p>f48 TO CHECK YOUR OUTGOING MESSAGES, DIAL 4. TO ADMINISTER MAILING LISTS, PERSONAL DIRECTORY, PASSWORD, OR ACCOUNT NAME DIAL 5. TO CHANGE OUTCALLING INFORMATION, DIAL 6. TO SCAN INCOMING MESSAGES AUTOMATICALLY, DIAL 7. TO RE-LOGON, DIAL STAR-STAR-R.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
al16	<p>f493 YOU ARE REQUESTING A TRANSFER.</p> <p>f562 ENTER THE NUMBER</p> <p>f563 DIGIT EXTENSION</p> <p>f119 YOU WISH TO CALL</p> <p>f224 AND POUND SIGN.</p> <p>f115 TO TRANSFER USING NAMES INSTEAD, DIAL STAR-A.</p> <p>f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
al17	<p>f493 YOU ARE REQUESTING A TRANSFER.</p> <p>f562 ENTER THE NUMBER</p> <p>f563 DIGIT EXTENSION</p> <p>f119 YOU WISH TO CALL</p> <p>f224 AND POUND SIGN.</p> <p>f115 TO TRANSFER USING NAMES INSTEAD, DIAL STAR-A.</p> <p>f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
al18	<p>f847 YOU ARE AUTOMATICALLY SCANNING YOUR INCOMING MESSAGES. TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RESPOND TO OR FORWARD THE MESSAGE, DIAL 1.</p> <p>f849 TO SKIP TO THE NEXT MESSAGE, DIAL THE POUND SIGN. TO PLAY BACK THE HEADER, REWIND BY DIALING 2, THEN PLAY BY DIALING 3. TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.</p> <p>f577 TO HOLD THE MESSAGE IN ITS CURRENT CATEGORY, DIAL STAR-STAR-H.</p> <p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f377 TO DELETE MESSAGE DIAL STAR-D.</p>
al19	<p>f305 YOU ARE AT THE ACTIVITY MENU.</p> <p>f985 TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2.</p> <p>f48 TO CHECK YOUR OUTGOING MESSAGES, DIAL 4. TO ADMINISTER MAILING LISTS, PERSONAL DIRECTORY, PASSWORD, OR ACCOUNT NAME, DIAL 5. TO CHANGE OUTCALLING INFORMATION, DIAL 6. TO SCAN INCOMING MESSAGES AUTOMATICALLY, DIAL 7. TO RE-LOGON, DIAL STAR-STAR-R.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a120	<p>f305 YOU ARE AT THE ACTIVITY MENU.</p> <p>f984 TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO ADMINISTER ATTENDANT MENU, DIAL 3.</p> <p>f48 TO CHECK YOUR OUTGOING MESSAGES, DIAL 4. TO ADMINISTER MAILING LISTS, PERSONAL DIRECTORY, PASSWORD, OR ACCOUNT NAME, DIAL 5. TO CHANGE OUTCALLING INFORMATION, DIAL 6. TO SCAN INCOMING MESSAGES AUTOMATICALLY, DIAL 7. TO RE-LOGON, DIAL STAR-STAR-R.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a121	<p>f305 YOU ARE AT THE ACTIVITY MENU.</p> <p>f986 TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO RECORD OR CHANGE THE TDD GREETINGS SEEN BY CALLERS, DIAL 3.</p> <p>f48 TO CHECK YOUR OUTGOING MESSAGES, DIAL 4. TO ADMINISTER MAILING LIST'S, PERSONAL DIRECTORY, PASSWORD, OR ACCOUNT NAME, DIAL 5. TO CHANGE OUTCALLING INFORMATION, DIAL 6. TO SCAN INCOMING MESSAGES AUTOMATICALLY, DIAL 7. TORE-LOGON, DIAL STAR-STAR-R.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W, TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

announcement	Fragment and Text
a122	<p>f848 YOU ARE AUTOMATICALLY SCANNING YOUR INCOMING MESSAGES. TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RESPOND TO THE MESSAGE, DIAL 1.</p> <p>f1149 TO SKIP TO THE NEXT MESSAGE DIAL THE POUND SIGN. TO PLAY BACK THE HEADER, REWIND BY DIALING 2, THEN PLAY BY DIALING 3. TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.</p> <p>f577 TO HOLD THE MESSAGE IN ITS CURRENT CATEGORY, DIAL STAR-STAR-H.</p> <p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING AUDIX.") TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f377 TO DELETE MESSAGE, DIAL STAR-D.</p>
a123	<p>f323 YOU ARE RESPONDING TO A PIECE OF INCOMING MAIL.</p> <p>f41 TO FORWARD MESSAGE WITH COMMENT AT BEGINNING, DIAL 2.</p> <p>f126 TO FORWARD MESSAGE WITH COMMENT AT END, DIAL 3.</p> <p>f8 TO RECORD A NEW MESSAGE DIAL 4.</p> <p>f1434 TO RETURN TO GETTING MESSAGES, DIAL POUND.</p> <p>f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
al24	<p>f491 YOU ARE GETTING YOUR INCOMING MESSAGES. TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RESPOND TO THE MESSAGE, DIAL 1.</p> <p>f376 TO SKIP TO THE NEXT HEADER, DIAL THE POUND SIGN. TO PLAY BACK THE HEADER, REWIND BY DIALING 2, THEN PLAY BY DIALING 3. TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.</p> <p>f577 TO HOLD THE MESSAGE IN ITS CURRENT CATEGORY, DIAL STAR-STAR-H.</p> <p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f377 TO DELETE MESSAGE, DIAL STAR-D.</p>
a125	<p>f305 YOU ARE AT THE ACTIVITY MENU.</p> <p>f985 TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2.</p> <p>f48 TO CHECK YOUR OUTGOING MESSAGES, DIAL 4. TO ADMINISTER MAILING LISTS, PERSONAL DIRECTORY, PASSWORD, OR ACCOUNT NAME, DIAL 5. TO CHANGE OUTCALLING INFORMATION, DIAL 6. TO SCAN INCOMING MESSAGES AUTOMATICALLY, DIAL 7. TO RE-LOGON, DIAL STAR-STAR-R.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a126	<p>f323 YOU ARE RESPONDING TO A PIECE OF INCOMING MAIL.                      f486 TO REPLY TO SENDER BY MAIL, DIAL 1.                      f8 TO RECORD A NEW MESSAGE, DIAL 4.                      f1434 TO RETURN TO GETTING MESSAGES, DIAL POUND.                      f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.                      f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a127	<p>f305 YOU ARE AT THE ACTIVITY MENU.                      f983 TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO RECORD OR CHANGE THE TDD GREETING SEEN BY CALLERS, DIAL 3.                      f48 TO CHECK YOUR OUTGOING MESSAGES, DIAL 4. TO ADMINISTER MAILING LISTS, PERSONAL DIRECTORY, PASSWORD, OR ACCOUNT NAME, DIAL 5. TO CHANGE OUTCALLING INFORMATION, DIAL 6. TO SCAN INCOMING MESSAGES AUTOMATICALLY, DIAL 7. TORE-LOGON, DIAL STAR-STAR-R.                      f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.                      f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.                      f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a128	<p>f323 YOU ARE RESPONDING TO A PIECE OF INCOMING MAIL.                      f8 TO RECORD A NEW MESSAGE, DIAL 4.                      f1434 TO RETURN TO GETTING MESSAGES, DIAL POUND.                      f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.                      f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a129	f305 YOU ARE AT THE ACTIVITY MENU. f985 TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. f48 TO CHECK YOUR OUTGOING MESSAGES, DIAL 4. TO ADMINISTER MAILING LISTS, PERSONAL DIRECTORY, PASSWORD, OR ACCOUNT NAME, DIAL 5. TO CHANGE OUTCALLING INFORMATION, DIAL 6. TO SCAN INCOMING MESSAGES AUTOMATICALLY, DIAL 7. TO RE-LOGON, DIAL STAR-STAR-R. f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a130	f659 MESSAGE WAITING NOTIFICATION WILL ALERT ALL LOCAL SUBSCRIBERS ABOUT THIS MESSAGE. THIS OPTION SHOULD BE USED SPARINGLY, BECAUSE IT CAN IMPACT SYSTEM PERFORMANCE.
a131	f725 YOU ARE ADDING ENTRIES TO YOUR PERSONAL DIRECTORY. f832 PLEASE ENTER EXTENSION AND POUND SIGN. f833 TO DELETE CURRENT ENTRY, DIAL STAR-D. f58 FOR NAME ADDRESSING, DIAL STAR-A. f913 IF FINISHED, DIAL POUND.
a132	f725 YOU ARE ADDING ENTRIES TO YOUR PERSONAL DIRECTORY. f799 ENTER LAST NAME f224 AND POUND SIGN. f833 TO DELETE CURRENT ENTRY, DIAL STAR-D. f148 FOR EXTENSION ADDRESSING, DIAL STAR-A. f913 IF FINISHED, DIAL POUND.
a133	f657 YOU ARE CHOOSING OPTIONS FOR THIS BROADCAST MESSAGE.
a134	f654 THE MESSAGE WILL BE BROADCAST AND PRIVATE.
a135	f649 THE MESSAGE WILL BE BROADCAST.

Announcement	Fragment and Text
a136	f723 YOU ARE ADMINISTERING YOUR PERSONAL DIRECTORY. f706 TO ADD ENTRIES, DIAL 1. TO REVIEW ALL ENTRIES, DIAL 2. TO REVIEW A SPECIFIC ENTRY, DIAL 3. f913 IF FINISHED, DIAL POUND.
a137	f325 YOU ARE ADMINISTERING YOUR LISTS. TO CREATE A MAILING LIST, DIAL 1. TO PLAY A S WARY OF ALL YOUR LISTS, DIAL 2. TO REVIEW A PARTICULAR LIST, DIAL 3.
a138	f665 YOU ARE CHOOSING OPTIONS FOR THIS LOGIN ANNOUNCEMENT.
a139	f650 THE MESSAGE WILL BE A LOGIN ANNOUNCEMENT.
a140	f652 A BROADCAST MESSAGE IS DELIVERED TO EVERY SUBSCRIBER ON THIS MACHINE. YOU MAY ALSO ADDRESS BROADCAST MESSAGES TO SUBSCRIBERS ON OTHER MACHINES.
a141	f655 A LOGIN ANNOUNCEMENT WILL BE PLAYED EACH TIME ANY SUBSCRIBER LOGS ONTO THIS MACHINE. YOU MAY ALSO ADDRESS A LOGIN MESSAGE TO SUBSCRIBERS ON OTHER MACHINES.
a142	f670 NON-INTERRUPTIBLE STATUS FORCES EACH SUBSCRIBER TO PLAY BACK THE ENTIRE LOGIN ANNOUNCEMENT EVERY TIME THEY LOG ONTO THIS MACHINE.
a143	f670 NON-INTERRUPTIBLE STATUS FORCES EACH SUBSCRIBER TO PLAY BACK THE ENTIRE LOGIN ANNOUNCEMENT EVERY TIME THEY LOG ONTO THIS MACHINE. f626 TO SPECIFY EXPIRATION DATE, DIAL 2. f671 EXPIRATION DATE SPECIFIES THE LAST DAY THIS LOGIN ANNOUNCEMENT WILL BE AVAILABLE TO SUBSCRIBERS. THE DEFAULT EXPIRATION DATE IS THE SECOND DAY AFTER THE SCHEDULED DELIVERY DATE. f661 TO APPROVE THESE OPTIONS, DIAL POUND. f774 IF YOU HAVE ADDRESSED THIS MESSAGE AND WISH TO DELIVER IT IMMEDIATELY, DIAL STAR-STAR-POUND.
a144	f646 A PRIORITY MESSAGE WILL BE DELIVERED BEFORE OTHER MESSAGES AND WILL BE FLAGGED FOR SPECIAL ATTENTION IN THE RECIPIENT'S MAILBOX.

Announcement	Fragment and Text
a145	f645 PRIVATE MESSAGES CANNOT BE FORWARDED BY THE RECIPIENTS.
a146	f662 MESSAGE WAITING NOTIFICATION IS ACTIVE. f628 TO DEACTIVATE MESSAGE WAITING NOTIFICATION, DIAL 1. f659 MESSAGE WAITING NOTIFICATION WILL ALERT ALL LOCAL SUBSCRIBERS ABOUT THIS MESSAGE. THIS OPTION SHOULD BE USED SPARINGLY, BECAUSE IT CAN IMPACT SYSTEM PERFORMANCE. f626 TO SPECIFY EXPIRATION DATE, DIAL 2.
a147	f288 YOU ARE IN THE NAMES DIRECTORY. TO FIND A SUBSCRIBER'S EXTENSION, ENTER THE LAST NAME FOLLOWED BY THE POUND SIGN. TO ENTER THE LETTER Q, DIAL 7. FOR Z, DIAL 9. TO LOOK UP BY EXTENSION INSTEAD DIAL STAR-A. f277 TO EXIT DIRECTORY, DIAL POUND. f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. f110 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT' AUDIX, DIAL STAR-STAR-X.
a148	f666 WITH THE CURRENT SETTINGS, THIS LOGIN ANNOUNCEMENT WILL BE NON-INTERRUPTIBLE.
a149	f643 YOU ARE CHOOSING OPTIONS FOR THIS MESSAGE. THERE ARE NO OPTIONS CURRENTLY SET. f612 TO MAKE PRIVATE, DIAL 1. f645 PRIVATE MESSAGES CANNOT BE FORWARDED BY THE RECIPIENTS.
a150	f610 YOU ARE RECORDING YOUR NAME. YOU CAN ACCESS OTHER AUDIX FEATURES AFTER YOU RECORD YOUR NAME. AS YOU USE AUDIX YOUR NAME WILL BE INCLUDED IN SYSTEM ANNOUNCEMENTS THAT YOU AND OTHER T'DD USERS WILL SEE. DIAL 1 AND, AFTER YOU SEE THE "GA" PROMPT, PLEASE USE YOUR TDD TO TYPE YOUR FIRST AND LAST NAME AS YOU WOULD LIKE OTHERS TO SEE IT. AFTER TYPING YOUR NAME, DIAL 1 AGAIN.
a151	F611 YOU ARE RECORDING YOUR NAME. TO RECORD YOUR NAME, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN. TO PLAY BACK YOUR RECORDING, DIAL 2-3. TO APPROVE YOUR RECORDING, DIAL POUND. NOTE: YOU MUST FINISH TYPING YOUR NAME IN TWELVE SECONDS OR LESS.

Announcement	Fragment and Text
a152	f322 YOU ARE IN THE NUMBERS DIRECTORY. TO FIND A SUBSCRIBER'S NAME ENTER THE EXTENSION FOLLOWED BY THE POUND SIGN. TO LOOKUP BY NAME INSTEAD, DIAL STAR-A. f277 TO EXIT DIRECTORY, DIAL POUND. f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. f110 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a153	f838 YOU ARE SELECTING WHICH MESSAGES WILL RECEIVE OUTCALLS.
a154	f916 TO SEND MESSAGE, DIAL POUND, OR ENTER A DELIVERY OPTION. TO SEE A LIST OF OPTIONS, DIAL ZERO.
a155	f644 YOU ARE CHOOSING OPTIONS FOR THIS MESSAGE. WITH THE CURRENT SETTINGS,
a156	f648 THE MESSAGE WILL BE PRIORITY.
a157	f726 YOU ARE REVIEWING ALL ENTRIES IN YOUR PERSONAL DIRECTORY. f372 TO SKIP TO NEXT ENTRY, DIAL POUND. TO DELETE CURRENT ENTRY, DIAL STAR-D. f852 TO REWIND TO THE CURRENT ENTRY, DIAL 2. TO REWIND TO PREVIOUS ENTRIES, DIAL 2 AS MANY TIMES AS NECESSARY.
a158	f729 YOU ARE REVIEWING A SPECIFIC ENTRY IN YOUR PERSONAL DIRECTORY. TO DELETE THE CURRENT ENTRY, DIAL STAR-D. TO REVIEW ANOTHER ENTRY, ENTER THE ALIAS FOLLOWED BY THE POUND SIGN.
a159	f305 YOU ARE AT THE ACTIVITY MENU. f986 TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO RECORD OR CHANGE THE TDD GREETINGS SEEN BY CALLERS, DIAL 3. f48 TO CHECK YOUR OUTGOING MESSAGES, DIAL 4. TO ADMINISTER MAILING LISTS, PERSONAL DIRECTORY, PASSWORD, OR ACCOUNT NAME, DIAL 5. TO CHANGE OUTCALLING INFORMATION, DIAL 6. TO SCAN INCOMING MESSAGES AUTOMATICALLY, DIAL 7. TORE-LOGON, DIAL STAR-STAR-R. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.

Announcement	Fragment and Text
a160	<p>f660 EXPIRATION DATE SPECIFIES THE LAST DAY THIS BROADCAST MESSAGE WILL BE AVAILABLE TO SUBSCRIBERS. THE EXPIRATION DATE DOES NOT APPLY TO A BROADCAST MESSAGE ALREADY RECEIVED BY A SUBSCRIBER AND SAVED IN THEIR MAILBOX. THE DEFAULT EXPIRATION DATE IS THE SECOND DAY AFTER THE SCHEDULED DELIVERY DATE.</p> <p>f661 TO APPROVE THESE OPTIONS, DIAL POUND.</p> <p>f774 IF YOU HAVE ADDRESSED THIS MESSAGE AND WISH TO DELIVER IT IMMEDIATELY, DIAL STAR-STAR-POUND.</p>
a161	<p>f800 YOU ARE SPECIFYING THE EXPIRATION DATE.</p> <p>f660 EXPIRATION DATE SPECIFIES THE LAST DAY THIS BROADCAST MESSAGE WILL BE AVAILABLE TO SUBSCRIBERS. THE EXPIRATION DATE DOES NOT APPLY TO A BROADCAST MESSAGE ALREADY RECEIVED BY A SUBSCRIBER AND SAVED IN THEIR MAILBOX. THE DEFAULT EXPIRATION DATE IS THE SECOND DAY AFTER THE SCHEDULED DELIVERY DATE.</p> <p>f384 PLEASE ENTER NUMBER OF MONTH, THEN TWO DIGITS FOR DAY, AND POUND SIGN.</p> <p>f831 TO EXIT THE EXPIRATION DATE OPTIONS, DIAL STAR-POUND.</p> <p>f774 IF YOU HAVE ADDRESSED THIS MESSAGE AND WISH TO DELIVER IT IMMEDIATELY, DIAL STAR-STAR-POUND.</p>
a162	<p>f800 YOU ARE SPECIFYING THE EXPIRATION DATE.</p> <p>f671 EXPIRATION DATE SPECIFIES THE LAST DAY THIS LOGIN ANNOUNCEMENT WILL BE AVAILABLE TO SUBSCRIBERS. THE DEFAULT EXPIRATION DATE IS THE SECOND DAY AFTER THE SCHEDULED DELIVERY DATE.</p> <p>f384 PLEASE ENTER NUMBER OF MONTH, THEN TWO DIGITS FOR DAY, AND POUND SIGN.</p> <p>f831 TO EXIT THE EXPIRATION DATE OPTIONS, DIAL STAR-POUND.</p> <p>f774 IF YOU HAVE ADDRESSED THIS MESSAGE AND WISH TO DELIVER IT IMMEDIATELY, DIAL STAR-STAR-POUND.</p>
a163	<p>f671 EXPIRATION DATE SPECIFIES THE LAST DAY THIS LOGIN ANNOUNCEMENT WILL BE AVAILABLE TO SUBSCRIBERS. THE DEFAULT EXPIRATION DATE IS THE SECOND DAY AFTER THE SCHEDULED DELIVERY DATE.</p> <p>f661 TO APPROVE THESE OPTIONS, DIAL POUND.</p> <p>f774 IF YOU HAVE ADDRESSED THIS MESSAGE AND WISH TO DELIVER IT IMMEDIATELY, DIAL STAR-STAR-POUND.</p>

Announcement	Fragment and Text
a164	f651 THE MESSAGE WILL BE PRIVATE AND PRIORITY.
a165	f703 YOU ARE AT SUBSCRIBER ADMINISTRATION. f700 TO ADMINISTER MAILING LISTS, DIAL 1. TO ADMINISTER PERSONAL DIRECTORY, DIAL 2. f701 TO CHANGE YOUR PASSWORD, DIAL 4.
a166	f703 YOU ARE AT SUBSCRIBER ADMINISTRATION. f700 TO ADMINISTER MAILING LISTS, DIAL 1. TO ADMINISTER PERSONAL DIRECTORY, DIAL 2. f701 TO CHANGE YOUR PASSWORD, DIAL 4. f702 TO RECORD YOUR NAME, DIAL 5.
a167	f736 YOU ARE RECORDING YOUR NAME. AS YOU USE AUDIX YOUR NAME WILL BE INCLUDED IN SYSTEM ANNOUNCEMENTS THAT YOU AND OTHER TDD USERS WILL SEE. f608 WAIT FOR THE "GA" PROMPT, THEN TYPE YOUR NAME. WHEN YOU HAVE FINISHED TYPING YOUR NAME, DIAL 1.
a168	f323 YOU ARE RESPONDING TO A PIECE OF INCOMING MAIL. f486 TO REPLY TO SENDER BY MAIL, DIAL 1. f8 TO RECORD A NEW MESSAGE, DIAL 4. f163 TO CALL SENDER, DIAL ZERO. f1434 TO RETURN TO GETTING MESSAGES, DIAL POUND. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a169	f323 YOU ARE RESPONDING TO A PIECE OF INCOMING MAIL. f8 TO RECORD A NEW MESSAGE DIAL 4. f163 TO CALL SENDER, DIAL ZERO. f1434 TO RETURN TO GETTING MESSAGES, DIAL POUND. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.

Announcement	Fragment and Text
a170	f323 YOU ARE RESPONDING TO A PIECE OF INCOMING MAIL. f41 TO FORWARD MESSAGE WITH COMMENT AT BEGINNING, DIAL 2. f126 TO FORWARD MESSAGE WITH COMMENT AT END, DIAL 3. f8 TO RECORD A NEW MESSAGE, DIAL 4. f163 TO CALL SENDER, DIAL ZERO. f1434 TO RETURN TO GETTING MESSAGES, DIAL POUND. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a171	f493 YOU ARE REQUESTING A TRANSFER f987 ENTER LAST NAME OF THE PERSON f119 YOU WISH TO CALL f224 AND POUND SIGN. f290 IF YOU WISH TO SPECIFY A NON-AUDIX SUBSCRIBER, FIRST CHANGE TO EXTENSION ADDRESSING BY DIAL STAR-A. f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a172	f493 YOU ARE REQUESTING A TRANSFER f987 ENTER LAST NAME OF THE PERSON f119 YOU WISH TO CALL f224 AND POUND SIGN. f290 IF YOU WISH TO SPECIFY A NON-AUDIX SUBSCRIBER, FIRST CHANGE TO EXTENSION ADDRESSING BY DIAL STAR-A. f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.

Announcement	Fragment and Text
a173	NAME
a174	NAME f822 AS YOU USE AUDIX YOUR NAME WILL BE INCLUDED IN SYSTEM ANNOUNCEMENTS THAT YOU AND OTHER TDD USERS WILL SEE. WAIT FOR THE "GA" PROMPT, THEN TYPE YOUR NAME. AFTER TYPING YOUR NAME, DIAL 1.
a175	NAME f146 TO CONTINUE, DIAL POUND. f143 TO STEP BACK AGAIN, DIAL 2.
a176	NAME f146 TO CONTINUE, DIAL POUND.
a177	NAME f680 IS BUSY. SORRY, YOU CANNOT LEAVE A MESSAGE BECAUSE THIS USER'S MAILBOX IS FULL.
a178	NAME f197 CANNOT STEP BACK.
a179	NAME f75 TO SKIP, DIAL POUND. TO DELETE, DIAL STAR-D. f294 TO ADD ENTRIES, DIAL 1.
a180	NAME f586 TO SKIP, DIAL POUND.
a181	NAME f218 DELETED.
a182	NAME f679 IS NOT AVAILABLE. SORRY, YOU CANNOT LEAVE A MESSAGE BECAUSE THIS USERS MAILBOX IS FULL.
a183	NAME NUMBER f63 NEW f601 PRIORITY IF (NUMBER=1) THEN f160 MESSAGE ELSE f168 MESSAGES. ENDIF

Announcement	Fragment and Text
a184	NAME NUMBER+NUMBER(2) f63 NEW f345 MAIL IF (NUMBER+NUMBER(2)==1) THEN f160 MESSAGE ELSE f168 MESSAGES. ENDIF f17 INCLUDING NUMBER f601 PRIORITY IF (NUMBER==1) THEN f160 MESSAGE ELSE f168 MESSAGES. ENDIF
a185	NAME NUMBER f63 NEW f345 MAIL IF (NUMBER==1) THEN f160 MESSAGE ELSE f168 MESSAGES. ENDIF
a186	NAMEEXT
a187	NAMEEXT f74 DELETED.

Announcement	Fragment and Text
a188	NAMEEXT f722 WAS NOT ADDED TO YOUR PERSONAL DIRECTORY.
a189	NAMEEXT f728 DELETED.
a190	NUMBER+NUMBER(2) f63 NEW f345 MAIL IF (NUMBER+NUMBER(2)==1) T H E N f160 MESSAGE ELSE f168 MESSAGES. ENDIF f17 INCLUDING NUMBER f601 PRIORITY IF (NUMBER=1) T H E N f160 MESSAGE ELSE f168 MESSAGES. ENDIF
a191	f236 TRY AGAIN f109 LATER. f95 PLEASE DISCONNECT.
a192	f234 TO RESPOND OR FORWARD, DIAL 1. f389 TO DELETE, DIAL STAR-D. f388 TO SKIP, DIAL POUND.
a193	f562 ENTER THE NUMBER f563 DIGIT EXTENSION f224 AND POUND SIGN. f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO. f115 TO TRANSFER USING NAMES INSTEAD, DIAL STAR-A.

Announcement	Fragment and Text
a194	f562 ENTER THE NUMBER f563 DIGIT EXTENSION f224 AND POUND SIGN. f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO. f115 TO TRANSFER USING NAMES INSTEAD, DIAL STAR-A. f335 WHEN FINISHED, DIAL POUND.
a195	f562 ENTER THE NUMBER f563 DIGIT EXTENSION f224 AND POUND SIGN. f115 TO TRANSFER USING NAMES INSTEAD, DIAL STAR-A.
a196	f562 ENTER THE NUMBER f563 DIGIT EXTENSION f224 AND POUND SIGN. f115 TO TRANSFER USING NAMES INSTEAD, DIAL STAR-A. f335 WHEN FINISHED, DIAL POUND.
a197	f547 GOOD-BYE.
a199	f592 AUDIX PASSWORDS MUST NOW BE NUMBER f81 DIGITS. f593 PLEASE CHOOSE A NEW PASSWORD OF NUMBER(2) f81 DIGITS. f173 PLEASE ENTER NEW PASSWORD f224 AND POUND SIGN.
a200	f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. f238 TO REVIEW ANOTHER LIST,
a201	f213 RE-ENTER PASSWORD f224 AND POUND SIGN.
a202	f18 TO FORWARD WITH COMMENT, DIAL 2. f 8 TO RECORD A NEW MESSAGE, DIAL 4.
a203	f41 TO FORWARD MESSAGE WITH COMMENT AT BEGINNING, DIAL 2. f126 TO FORWARD MESSAGE WITH COMMENT AT END, DIAL 3. f 8 TO RECORD A NEW MESSAGE, DIAL 4.

Announcement	Fragment and Text
a204	f486 TO REPLY TO SENDER BY MAIL, DIAL 1. f8 TO RECORD A NEW MESSAGE, DIAL 4.
a205	f8 TO RECORD A NEW MESSAGE, DIAL 4.
a206	f252 TO RESPOND TO THIS MESSAGE, DIAL 1. f389 TO DELETE, DIAL STAR-D. f388 TO SKIP, DIAL POUND.
a207	f930 ACCESSED MESSAGES
a208	f625 TO ACTIVATE MESSAGE WAITING NOTIFICATION, DIAL 1.
a209	f625 TO ACTIVATE MESSAGE WAITING NOTIFICATION, DIAL 1. f659 MESSAGE WAITING NOTIFICATION WILL ALERT ALL LOCAL SUBSCRIBERS ABOUT THIS MESSAGE. THIS OPTION SHOULD BE USED SPARINGLY, BECAUSE IT CAN IMPACT SYSTEM PERFORMANCE. f626 TO SPECIFY EXPIRATION DATE, DIAL 2.
a210	f246 MESSAGE ADDRESSED TO NAME IF (NUMBER>0) THEN f2 AND NUMBER IF (NUMBER=1) THEN f602 OTHER ELSE f217 OTHERS ENDIF ENDIF
a211	f336 TO REVIEW ADDRESSEES, DIAL STAR-1. f247 TO ADD TO LIST,
a212	f334 WHEN FINISHED ADDRESSING, DIAL POUND.
a213	f464 ENTER EXTENSIONS f224 AND POUND SIGN.
a214	f465 ENTER LAST NAME f224 AND POUND SIGN.

Announcement	Fragment and Text
a215	f832 PLEASE ENTER EXTENSION AND POUND SIGN. f708 IF FINISHED ADDING ENTRIES, DIAL POUND.
a216	f799 ENTER LAST NAME f224 AND POUND SIGN. f708 IF FINISHED ADDING ENTRIES, DIAL POUND.
a217	f464 ENTER EXTENSIONS f135 AND POUND SIGN.
a218	f464 ENTER EXTENSIONS f135 AND POUND SIGN. f335 WHEN FINISHED, DIAL POUND.
a219	f464 ENTER EXTENSIONS f135 AND POUND SIGN. f121 WHEN FINISHED, APPROVE LIST BY DIALING POUND.
a220	f131 TO SEND TO OTHERS NOT ON YOUR LIST,
a221	f465 ENTER LAST NAME f135 AND POUND SIGN.
a222	f465 ENTER LAST NAME f135 AND POUND SIGN. f335 WHEN FINISHED, DIAL POUND.
a223	f465 ENTER LAST NAME f135 AND POUND SIGN. f121 WHEN FINISHED, APPROVE LIST BY DIALING POUND.
S224	f711 ALIAS BUTTONS f712 DEFINED FOR NAME
a225	f711 ALIAS BUTTONS f712 DEFINED FOR NAMEEXT f728 DELETED.
a226	f711 ALIAS BUTTONS f712 DEFINED FOR NAMEEXT f197 CANNOT STEP BACK.

Announcement	Fragment and Text
a227	f631 MESSAGE WAITING NOTIFICATION ACTIVATED. f632 EXPIRATION DATE WILL BE DATE
a228	f711 ALIAS BUTTONS f712 DEFINED FOR NAMEEXT f372 TO SKIP TO NEXT ENTRY, DIAL FOUND. TO DELETE CURRENT ENTRY, DIAL STAR-D.
a229	f711 ALIAS BUTTONS f185 NOT FOUND.
a230	f744 FOR ALL CALLS, IF (NUMBER=0) T H E N f776 THE SYSTEM GREETING ELSE f754 GREETING NUMBER ENDIF f745 ACTIVE.
a231	f716 ALIAS MUST BE TEN OR FEWER NUMERALS.
a232	f716 ALIAS MUST BE TEN OR FEWER NUMERALS. f727 ENTER ALIAS AND POUND SIGN.
a233	f717 ALIAS ALREADY DEFINED.
a234	f709 ENTER ALIAS FOR NAME f224 AND FOUND SIGN.

Announcement	Fragment and Text
5235	f2 AND NUMBER f63 NEW f601 PRIORITY IF (NUMBER==1) T H E N f160 MESSAGE ELSE f168 MESSAGES. ENDIF
a236	f2 AND NUMBER f602 OTHER f63 NEW f345 MAIL IF (NUMBER==1) T H E N f160 MESSAGE ELSE f168 MESSAGES. ENDIF
a237	f540 AND FROM TIME f524 TO TIME(2)
a238	f16 ENTER ANNOUNCEMENT ID f224 AND POUND SIGN.
a239	f627 TO APPROVE BROADCAST OPTIONS, DIAL POUND.
a240	f634 TO APPROVE LOGIN ANNOUNCEMENT OPTIONS, DIAL POUND.
5241	f606 TO RE-RECORD YOUR NAME, DIAL 1. TO APPROVE DIAL POUND.

Announcement	Fragment and Text
a242	f791 CALLS IDENTIFIED AS BUSY AND NO-ANSWER. f792 CALLS IDENTIFIED AS OUT-OF-HOURS.
a243	f791 CALLS IDENTIFIED AS BUSY AND NO-ANSWER. f793 CALLS NOT IDENTIFIED AS OUT-OF-HOURS.
a244	f790 CALLS IDENTIFIED AS INTERNAL AND EXTERNAL. f792 CALLS IDENTIFIED AS OUT-OF-HOURS.
a245	f790 CALLS IDENTIFIED AS INTERNAL AND EXTERNAL. f793 CALLS NOT IDENTIFIED AS OUT-OF-HOURS.
a246	f502 TO RECORD ATTENDANT MENU, DIAL 1. TO PLAY BACK ATTENDANT MENU, DIAL ZERO. f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.
a247	f506 MENU APPROVED AND ACTIVATED.
a248	f505 YOU HAVE SELECTED AN INVALID OPTION.
a249	f27 TO ATTACH ORIGINAL, DIAL "Y" FOR YES OR "N" FOR NO.
a250	f580 CANNOT ATTACH A PRIVATE MESSAGE
a251	f580 CANNOT ATTACH A PRIVATE MESSAGE f581 DIAL "N" NOW
a252	f504 TRANSFERRING TIO AN OPERATOR,
a253	f508 ATTENDANT SERVICE NOT AVAILABLE, TRY AGAIN LATER. f95 PLEASE DISCONNECT.
a254	f843 TO SCAN HEADERS AND MESSAGES, DIAL 1. TO SCAN HEADERS ONLY, DIAL 2. TO SCAN MESSAGES ONLY, DIAL 3.
a255	f29 RETURNED TO CHECKING STATUS OF OUTGOING MESSAGES.
a256	f640 MESSAGE CANNOT BE BOTH A LOGIN ANNOUNCEMENT AND PRIORITY.
a257	f641 MESSAGE CANNOT BE BOTH A LOGIN ANNOUNCEMENT AND PRIVATE.
a258	f272 CONTACT ADMINISTRATOR FOR HELP. f95 PLEASE DISCONNECT.
a259	f642 MESSAGE CANNOT BE BOTH BROADCAST AND A LOGIN ANNOUNCEMENT.
a260	f639 MESSAGE CANNOT BE BOTH BROADCAST AND PRIORITY.

Announcement	Fragment and Text
5261	f31 DATE NOT UNDERSTOOD. f384 PLEASE ENTER NUMBER OF MONTH, THEN TWO DIGITS FOR DAY, AND POUND SIGN.
a262	f32 YOU MUST ENTER YOUR EXTENSION TO LOGON.
a263	f100 INVALID ENTRY.
a264	f35 LOGIN INCORRECT.
a265	f35 LOGIN INCORRECT. f236 TRY AGAIN
5266	f40 TIME NOT UNDERSTOOD. f383 PLEASE ENTER HOUR, THEN TWO DIGITS FOR MINUTES, THEN "A" FOR AM OR "P FOR PM, AND POUND SIGN.
a267	f13 TO RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN.
a268	f683 BROADCASTER HAS DELETED THIS BROADCAST MESSAGE.
5269	f682 BROADCAST MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER)
a270	f682 BROADCAST MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) f689 EXPIRATION TIME IS TIME(2) DATE(2)
a271	f682 BROADCAST MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) EXTENSION

Announcement	Fragment and Text
a272	f682 BROADCAST MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) EXTENSION f689 EXPIRATION TIME IS TIME(2) DATE(2)
a273	f693 BROADCAST MESSAGE TO ALL LOCAL SUBSCRIBERS IF (NUMBER>0) THEN f2    AND NUMBER IF (NUMBER=1) THEN f602 OTHER ELSE f217 OTHERS ENDIF ENDIF
a274	f653 FOR BROADCAST OPTIONS, DIAL STAR-M.
a275	f623 BROADCAST.
a276	f21 TO PLAY BACK, DIAL ZERO. f389 TO DELETE, DIAL STAR-D. f388 TO SKIP, DIAL POUND.
a277	f917 TO SCHEDULE DELIVERY, DIAL 3.

Announcement	Fragment and Text
a278	f749 FOR BUSY CALLS, IF (NUMBER=0) THEN f776 THE SYSTEM GREETING ELSE f754 GREETING NUMBER ENDIF f745 ACTIVE.
a279	f513 BEGIN YOUR MESSAGE BY TYPING (NOT DIALING) THE NAME AND TELEPHONE NUMBER OF THE PERSON YOU ARE CALLING. SOMEONE WILL CHECK THE START OF YOUR MESSAGE AND THEN FORWARD THE COMPLETE MESSAGE TO THE PERSON YOU CALLED.
a280	f51 ENTRIES DELETED, PLEASE RE-ENTER DELIVERY TIME.
a281	f76 DELETED.
a282	f43 YOUR CALL IS BEING ANSWERED BY TDD-AUDIX. f507 THE PERSON YOU CALLED IS NOT AVAILABLE. TO LEAVE A MESSAGE USE TOUCHTONES TO RE-ENTER THE NUMBER YOU CALLED. f239 FOLLOWED BY THE POUND SIGN.
a283	f5 TO RECORD PERSONAL GREETING, DIAL 1. TO SEE PERSONAL GREETING, DIAL ZERO. TO SELECT WHICH GREETING TO USE, DIAL STAR-POUND.
a284	f42 THE RETURN ADDRESS FOR THIS MESSAGE IS NOT A MAILBOX ON THIS SYSTEM.
a285	f56 THANK YOU FOR LEAVING YOUR MESSAGE. f46 TO ACCESS YOUR MAILBOX, DIAL STAR-R. f973 IF YOU ARE FINISHED, PLEASE HANG UP.
a286	f47 CALL FROM NAME f262 RECEIVED TIME DATE a873(NUMBER)

Announcement	Fragment and Text
a287	f47 CALL FROM NAME f26 RECEIVED TIME DATE f86 EXTENSION BUTTONS a873(NUMBER)
a288	f43 YOUR CALL IS BEING ANSWERED BY TDD-AUDIX. NAME f680 IS BUSY. SORRY, YOU CANNOT LEAVE A MESSAGE BECAUSE THIS USER'S MAILBOX IS FULL.
a289	IF (NUMBER=0) T H E N f43 YOUR CALL IS BEING ANSWERED BY TDD-AUDIX. NAME f44 IS NOT AVAILABLE. TO LEAVE A TDD MESSAGE, PLEASE WAIT FOR THE "GA" PROMPT. ENDIF IF (NUMBER=1) T H E N f71 TO LEAVE A TDD MESSAGE, PLEASE WAIT FOR THE "GA" PROMPT. ENDIF IF (NUMBER=2) T H E N NAME f44 IS NOT AVAILABLE. TO LEAVE A TDD MESSAGE, PLEASE WAIT FOR THE "GA" PROMPT. ENDIF

Announcement	Fragment and Text
a290	<pre> IF (NUMBER=0) THEN f43 YOUR CALL IS BEING ANSWERED BY TDD-AUDIX. NAME f45 IS BUSY. TO LEAVE A TDD MESSAGE, PLEASE WAIT FOR THE "GA" PROMPT. ENDIF IF (NUMBER=1) T H E N f71 TO LEAVE A TDD MESSAGE, PLEASE WAIT' FOR THE "GA" PROMPT. ENDIF IF (NUMBER=2) THEN NAME f45 IS BUSY. TO LEAVE A TDD MESSAGE, PLEASE WAIT FOR THE "GA" PROMPT. ENDIF </pre>
a291	<pre> IF (NUMBER==0) T H E N f43 YOUR CALL IS BEING ANSWERED BY TDD-AUDIX. NAME f45 IS BUSY. TO LEAVE A TDD MESSAGE, PLEASE WAIT FOR THE "GA" PROMPT. ENDIF IF (NUMBER=1) THEN f71 TO LEAVE A TDD MESSAGE PLEASE WAIT FOR THE "GA" PROMPT. ENDIF IF (NUMBER=2) THEN NAME f45 IS BUSY. TO LEAVE A TDD MESSAGE, PLEASE WAIT FOR THE "GA" PROMPT. ENDIF f112 OTHERWISE, FOR ASSISTANCE, DIAL ZERO NOW. </pre>

Announcement	Fragment and Text
a292	<p>IF (NUMBER=0) THEN</p> <p>f43 YOUR CALL IS BEING ANSWERED BY TDD-AUDIX. N A M E</p> <p>f44 IS NOT AVAILABLE. TO LEAVE A TDD MESSAGE, PLEASE WAIT FOR THE "GA PROMPT". ENDIF</p> <p>IF (NUMBER=1) THEN</p> <p>f71 TO LEAVE A TDD MESSAGE, PLEASE WAIT FOR THE "GA PROMPT". ENDIF</p> <p>IF (NUMBER=2) THEN</p> <p>NAME</p> <p>f44 IS NOT AVAILABLE. TO LEAVE A TDD MESSAGE, PLEASE WAIT FOR THE "GA" PROMPT. ENDIF</p> <p>f112 OTHERWISE FOR ASSISTANCE, DIAL ZERO NOW.</p>
a293	<p>f43 YOUR CALL IS BEING ANSWERED BY TDD-AUDIX. NAME</p> <p>f679 IS NOT AVAILABLE. SORRY, YOU CANNOT LEAVE A MESSAGE BECAUSE THIS USER'S MAILBOX IS FULL.</p>
a294	f156 MAXIMUM LENGTH RECORDED.
a295	<p>f50 CALL NAME</p> <p>f262 RECEIVED TIME DATE</p> <p>f86 EXTENSION BUTTONS a873(NUMBER)</p>

Announcement	Fragment and Text
a296	f50 CALL f262 RECEIVED TIME DATE a873(NUMBER)
a297	f507 THE PERSON YOU CALLED IS NOT AVAILABLE. TO LEAVE A MESSAGE, USE TOUCHTONES TO RE-ENTER THE NUMBER YOU CALLED.
a298	f507 THE PERSON YOU CALLED IS NOT AVAILABLE. TO LEAVE A MESSAGE, USE TOUCHTONES TO RE-ENTER THE NUMBER YOU CALLED. f274 PLEASE MAKE ENTRY SOON, OR BE DISCONNECTED.
a299	f511 IF YOU DO NOT HAVE A TOUCHTONE TELEPHONE, f380 PLEASE WAIT.
a300	f794 TO CHANGE IDENTIFICATION TO BUSY AND NO-ANSWER, DIAL 2.
a301	f911 ENTER BUTTONS FOLLOWED BY POUND.
a302	f912 ENTER NUMBER FOLLOWED BY POUND.
a303	f630 TO CHANGE EXPIRATION DATE FROM DATE f762 DIAL 2.
a304	f795 TO CHANGE IDENTIFICATION TO INTERNAL AND EXTERNAL, DIAL 1.
a305	f910 YOU ARE ATTEMPTING TO PLAY AN ANNOUNCEMENT THAT NEEDS ADDITIONAL INPUT BEFORE IT CAN BE PLAYED. f911 ENTER BUTTONS FOLLOWED BY POUND.
a306	f910 YOU ARE ATTEMPTING TO PLAY AN ANNOUNCEMENT THAT NEEDS ADDITIONAL INPUT BEFORE IT CAN BE PLAYED. f912 ENTER NUMBER FOLLOWED BY POUND.
a307	f527 TO CHANGE NUMBER DIAL 1. TO CHANGE TIMES, DIAL 2. FOR INSTRUCTIONS ON ENTERING YOUR OUTCALLING NUMBER, DIAL 3. f528 TO TURN ON, DIAL "Y". TO TURN OFF, DIAL "N".
a308	f60 CHANGED.
a309	f565 OUTCALL CANCELED FOR NEW MESSAGES CURRENTLY IN MAILBOX.

Announcement	Fragment and Text
a310	f12 TO RE-RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN. TO DELETE DIAL STAR-D. TO PLAY BACK DIAL 2-3. TO APPROVE AS IS, DIAL POUND.
a311	f628 TO DEACTIVATE MESSAGE WAITING NOTIFICATION, DIAL 1.
a312	f76 DELETED.
a313	f931 DELIVERED MESSAGES
a314	f801 TO RESPOND TO THIS NOTIFICATION, DIAL 1. TO DELETE, DIAL STAR-D. TO SKIP, DIAL POUND.
	f33 TO DELETE, DIAL STAR-D. f388 TO SKIP, DIAL POUND.
a316	f77 DELETED.
a317	f77 DELETED. f173 PLEASE ENTER NEW PASSWORD f224 AND POUND SIGN.
a318	f77 DELETED. f22 TO DELIVER NOW, DIAL POUND. OR, TO SCHEDULE DELIVERY TIME, USE THE TELEPHONE KEYS TO ENTER HOUR, MINUTES, A OR P, AND POUND SIGN.
a319	f706 TO ADD ENTRIES, DIAL 1. TO REVIEW ALL ENTRIES, DIAL 2. TO REVIEW A SPECIFIC ENTRY, DIAL 3. f913 IF FINISHED, DIAL POUND.
a320	f705 DIRECTORY CONTAINS NUMBER IF (NUMBER=1) THEN f84 ENTRY. ELSE f83 ENTRIES. ENDIF
a321	f724 PERSONAL DIRECTORY REVIEW COMPLETED.
	f140 ENTRY ALREADY DELETED. TO DELETE MORE ENTRIES, DIAL STAR-1.
a323	f79 DELETED.
	f145 LIST HAS NO ENTRIES.
	f538 ENTER THE ENDING HOUR, MINUTES, "A" OR "P, AND POUND SIGN.

Announcement	Fragment and Text
a326	f472 TO APPROVE, DIAL POUND. TO RECORD FROM HERE, DIAL 1. f389 TO DELETE, DIAL STAR-D.
a327	f727 ENTER ALIAS AND POUND SIGN. f833 TO DELETE CURRENT ENTRY, DIAL STAR-D. f148 FOR EXTENSION ADDRESSING, DIAL STAR-A. f913 IF FINISHED, DIAL POUND.
a328	f727 ENTER ALIAS AND POUND SIGN. f833 TO DELETE CURRENT ENTRY, DIAL STAR-D. f58 FOR NAME ADDRESSING, DIAL STAR-A. f913 IF FINISHED, DIAL POUND.
a329	f727 ENTER ALIAS AND POUND SIGN. f913 IF FINISHED, DIAL POUND.
a330	f713 ENTER NEXT EXTENSION AND POUND SIGN. f708 IF FINISHED ADDING ENTRIES, DIAL POUND.
a331	f710 ENTER NEXT NAME AND POUND SIGN. f708 IF FINISHED ADDING ENTRIES, DIAL POUND.
a332	f85 ERASED. f13 TO RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN.
a333	f632 EXPIRATION DATE WILL BE DATE
a334	f86 EXTENSION BUTTONS f552 IS NOT AUTHORIZED TO RECEIVE MESSAGES.
a335	f86 EXTENSION BUTTONS f552 IS NOT AUTHORIZED TO RECEIVE MESSAGES. f553 YOU MAY ENTER ANOTHER NUMBER
a336	f86 EXTENSION BUTTONS f552 IS NOT AUTHORIZED TO RECEIVE MESSAGES. f95 PLEASE DISCONNECT.
a337	f86 EXTENSION BUTTONS f841 NOT DEFINED
a338	f86 EXTENSION f202 NOT VALID.

Announcement	Fragment and Text
a339	f748 FOR EXTERNAL CALLS, IF (NUMBER=0) THEN f776 THE SYSTEM GREETING ELSE f7S4 GREETING NUMBER ENDIF f145 ACTIVE.
a340	f971 TO SEND, DIAL POUND.
a341	f971 TO SEND, DIAL POUND. f774 IF YOU HAVE ADDRESSED THIS MESSAGE AND WISH TO DELIVER IT IMMEDIATELY, DIAL STAR-STAR-FOUND.
a342	f739 MESSAGE SENT TO ALL LOCAL SUBSCRIBERS. IF (NUMBER>0) THEN f2 AND NUMBER IF (NUMBER=1) THEN f602 OTHER ELSE f217 OTHERS ENDIF ENDIF

Announcement	Fragment and Text
a343	<pre> f740 PRIVATE MESSAGE SENT TO ALL LOCAL SUBSCRIBERS.       IF       (NUMBER&gt;0)       THEN f 2  A N D       NUMBER       IF       (NUMBER=1)       THEN f602 OTHER       ELSE f217 OTHERS       ENDIF       ENDIF </pre>
a344	<pre> f741 PRIVATE PRIORITY MESSAGE SENT TO       NAME       IF       (NUMBER&gt;0)       THEN f2  AND       NUMBER       IF       (NUMBER=1)       THEN f602 OTHER       ELSE f217 OTHERS       ENDIF       ENDIF </pre>

Announcement	Fragment and Text
a345	f743 PRIORITY MESSAGE SENT TO NAME IF (NUMBER>0) THEN f2   AND NUMBER IF (NUMBER=1) THEN f602 OTHER ELSE f217 OTHERS ENDIF ENDIF
a346	f474 TO PLAY BACK, DIAL ZERO. TO CHANGE OR SEND AGAIN, DIAL 1. f388 TO SKIP, DIAL POUND.
a347	f932 FILED MESSAGES
a348	f89 FIRST MESSAGE. f197 CANNOT STEP BACK. f142 TO PLAY BACK THE HEADER, DIAL 3.
a349	f118 ENTER LAST NAME f224 AND POUND SIGN. f175 PLEASE NOTE ONLY AUDIX SUBSCRIBERS CAN BE SPECIFIED BY NAME.

Announcement	Fragment and Text
a350	f807 FOR BUSY f2 AND f812 NO-ANSWER f1314CALLS. IF (NUMBER=0) THEN f776 THE SYSTEM GREETING ELSE f754 GREETING NUMBER ENDIF f745 ACTIVE.
a351	f807 FOR BUSY f812 NO-ANSWER f813 AND OUT-OF-HOURS f814 CALLS. IF (NUMBER=0) THEN  ELSE f754 GREETING NUMBER E N D I F f745 ACTIVE.

Announcement	Fragment and Text
a352	f805 FOR INTERNAL f2 AND f810 EXTERNAL f814 CALLS. IF (NUMBER=0) THEN f776 THE SYSTEM GREETING ELSE f754 GREETING NUMBER ENDIF f745 ACTIVE.
a353	f805 FOR INTERNAL f810 EXTERNAL f813 AND OUT-OF-HOURS f814 CALLS. IF (NUMBER=0) THEN f776 THE SYSTEM GREETING ELSE f754 GREETING NUMBER ENDIF f745 ACTIVE.
a354	190 ENTER FRAGMENT ID f224 AND POUND SIGN.
a355	f684 PRIVATE, BROADCAST MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER)

Announcement	Fragment and Text
a356	f684 PRIVATE BROADCAST MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) f689 EXPIRATION TIME IS TIME(2) DATE(2)
a357	f684 PRIVATE, BROADCAST MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) EXTENSION
a358	f684 PRIVATE, BROADCAST MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) EXTENSION f689 EXPIRATION TIME IS TIME(2) DATE(2)
a359	f267 PLEASE ENTER EXTENSION f224 AND POUND SIGN.
a360	f715 CANNOT ADD NEW ENTRIES BECAUSE YOUR DIRECTORY IS FULL.
a361	f715 CANNOT ADD NEW ENTRIES BECAUSE YOUR DIRECTORY IS FULL. NAMEEXT f722 WAS NOT ADDED TO YOUR PERSONAL DIRECTORY.

Announcement	Fragment and Text
a362	f93 YOU HAVE NO PERSONAL GREETING, SYSTEM GREETING USED.
a363	f94 GOOD-BYE.
a364	f243 REWOUND.
a365	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f823 FOR ALL CALLS
a366	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f827 FOR BUSY f2 AND f812 NO-ANSWER f814 CALLS.
a367	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f827 FOR BUSY f813 AND OUT-OF-HOURS f814 CALLS.
a368	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f827 FOR BUSY f814 CALLS.
a369	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f827 FOR BUSY f812 NO-ANSWER f813 AND OUT-OF-HOURS f814 CALLS.

Announcement	Fragment and Text
a370	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f826 FOR EXTERNAL f813 AND OUT-OF-HOURS f814 CALLS.
a371	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f826 FOR EXTERNAL F814 CALLS.
a372	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f825 FOR INTERNAL f2 AND f810 EXTERNAL f814 CALLS.
a373	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f825 FOR INTERNAL f813 AND OUT-OF-HOURS f814 CALLS.
a374	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f825 FOR INTERNAL f814 CALLS.
a375	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f825 FOR INTERNAL f810 EXTERNAL f813 AND OUT-OF-HOURS f814 CALLS.

Announcement	Fragment and Text
a376	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f828 FOR NO-ANSWER f813 AND OUT-OF-HOURS f814 CALLS.
a377	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f828 FOR NO-ANSWER f814 CALLS.
a378	f754 GREETING NUMBER f771 APPROVED AND ACTIVE f829 FOR OUT-OF-HOURS f814 CALLS.
a379	f754 GREETING NUMBER f74 DELETED.
a380	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f823 FOR ALL CALLS
a381	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f827 FOR BUSY f2 AND f812 NO-ANSWER f814 CALLS.

Announcement	Fragment and Text
a382	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f827 FOR BUSY f813 AND OUT-OF-HOURS f814 CALLS.
a383	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f827 FOR BUSY f814 CALLS.
a384	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f827 FOR BUSY f812 NO-ANSWER f813 AND OUT-OF-HOURS F814 CALLS.
a385	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f826 FOR EXTERNAL f813 AND OUT-OF-HOURS f814 CALLS.
a386	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f826 FOR EXTERNAL f814 CALLS.

Announcement	Fragment and Text
a387	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f825 FOR INTERNAL f2 AND f810 EXTERNAL f814 CALLS.
a388	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f825 FOR INTERNAL f813 AND OUT-OF-HOURS f814 CALLS.
a389	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f825 FOR INTERNAL f814 CALLS.
a390	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f825 FOR INTERNAL f810 EXTERNAL f813 AND OUT-OF-HOURS f814 CALLS.
a391	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f828 FOR NO-ANSWER f813 AND OUT-OF-HOURS f814 CALLS.

Announcement	Fragment and Text
a392	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f828 FOR NO-ANSWER f814 CALLS.
a393	f754 GREETING NUMBER f74 DELETED. f332 SYSTEM GREETING USED. f829 FOR OUT-OF-HOURS f814 CALLS.
a394	f754 GREETING NUMBER f768 APPROVED.
a395	f754 GREETING NUMBER f755 NOT RECORDED.
a396	f754 GREETING NUMBER f765 RECORDED, BUT' NOT ACTIVE.
a397	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f823 FOR ALL CALLS
a398	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f827 FOR BUSY f 2 A N D f812 NO-ANSWER f814 CALLS.

Announcement	Fragment and Text
a399	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f827 FOR BUSY f813 AND OUT-OF-HOURS f814 CALLS.
a400	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f827 FOR BUSY f814 CALLS.
a401	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f827 FOR BUSY f812 NO-ANSWER f813 AND OUT-OF-HOURS f814 CALLS
a402	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f826 FOR EXTERNAL f813 AND OUT-OF-HOURS t814 CALLS.
a403	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f826 FOR EXTERNAL f814 CALLS.
a404	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f825 FOR INTERNAL f 2 A N D f810 EXTERNAL f814 CALLS.

Announcement	Fragment and Text
a405	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f825 FOR INTERNAL f813 AND OUT-OF-HOURS f814 CALLS.
a406	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f825 FOR INTERNAL f814 CALLS.
a407	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f825 FOR INTERNAL F810 EXTERNAL f813 AND OUT-OF-HOURS f814 CALLS.
a408	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f828 FOR NO-ANSWER f813 AND OUT-OF-HOURS f814 CALLS
a409	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f828 FOR NO-ANSWER f814 CALLS.
a410	f754 GREETING NUMBER f770 RECORDED AND ACTIVE f829 FOR OUT-OF-HOURS f814 CALLS.

Announcement	Fragment and Text
a411	f754 GREETING NUMBER f745 ACTIVE. f823 FOR ALL CALLS
a412	f754 GREETING NUMBER f745 ACTIVE. f827 FOR BUSY f2 AND f812 NO-ANSWER f814 CALLS.
a413	f754 GREETING NUMBER f745 ACTIVE. f827 FOR BUSY f813 AND OUT-OF-HOURS f814 CALLS.
a414	f754 GREETING NUMBER f745 ACTIVE. f827 FOR BUSY f814 CALLS.
a415	f754 GREETING NUMBER f745 ACTIVE. f827 FOR BUSY f812 NO-ANSWER f813 AND OUT-OF-HOURS f814 CALLS.
a416	f754 GREETING NUMBER f745 ACTIVE. f826 FOR EXTERNAL f813 AND OUT-OF-HOURS f814 CALLS.

Announcement	Fragment and Text
a417	f754 GREETING NUMBER f745 ACTIVE. f826 FOR EXTERNAL f814 CALLS.
a418	f754 GREETING NUMBER f745 ACTIVE. f825 FOR INTERNAL f2 AND f810 EXTERNAL f814 CALLS.
a419	f754 GREETING NUMBER f745 ACTIVE. f825 FOR INTERNAL f813 AND OUT-OF-HOURS f814 CALLS.
a420	f754 GREETING NUMBER f745 ACTIVE. f825 FOR INTERNAL f814 CALLS.
a421	f754 GREETING NUMBER f745 ACTIVE. f825 FOR INTERNAL f810 EXTERNAL f813 AND OUT-OF-HOURS f814 CALLS.

Announcement	Fragment and Text
a422	f754 GREETING NUMBER f745 ACTIVE. f828 FOR NO-ANSWER f813 AND OUT-OF-HOURS f814 CALLS.
a423	f754 GREETING NUMBER f745 ACTIVE. f828 FOR NO-ANSWER f814 CALLS.
a424	f754 GREETING NUMBER f745 ACTIVE. f829 FOR OUT-OF-HOURS f814 CALLS.
a425	f752 TO PLAY BACK A SPECIFIC GREETING, DIAL ZERO. TO CREATE, CHANGE OR DELETE A GREETING, DIAL 1. TO SCAN ALL YOUR GREETINGS, DIAL 2. TO ACTIVATE A GREETING, DIAL 3. TO ADMINISTER CALL TYPES, DIAL 4. IF FINISHED, DIAL POUND.
a426	f756 TO SEE GREETING NUMBER f772 AGAIN f760 DIAL ZERO.
a427	f756 TO SEE GREETING NUMBER f760 DIAL ZERO.
a428	f753 ENTER GREETING NUMBER.
a429	f757 TO RE-RECORD, DIAL 1. f758 TO DELETE, DIAL STAR-D. f913 IF FINISHED, DIAL POUND.
a430	f757 TO RE-RECORD, DIAL 1. f759 TO REVIEW STATUS, DIAL 2. f758 TO DELETE, DIAL STAR-D. f913 IF FINISHED, DIAL POUND.

Announcement	Fragment and Text
a431	f88 CANNOT USE THE GUEST PASSWORD f173 PLEASE ENTER NEW PASSWORD f224 AND POUND SIGN.
a432	f788 TO IDENTIFY CALLS AS OUT-OF-HOURS, DIAL 3.
a433	f747 FOR INTERNAL CALLS, IF (NUMBER==0) THEN f776 THE SYSTEM GREETING ELSE f754 GREETING NUMBER ENDIF f745 ACTIVE.
a434	f737 LOGIN ANNOUNCEMENT WILL BE INTERRUPTIBLE.
a435	f136 LINE BUSY.
a436	f149 ALL CIRCUITS BUSY.
a437	f99 INVALID ANNOUNCEMENT.
a438	f637 INVALID DATE.
a439	f637 INVALID DATE. DATE f678 IS PAST THE EXPIRATION DATE, PLEASE RESCHEDULE.
a440	f637 INVALID DATE. DATE f638 IS PRIOR TO DELIVERY DATE, PLEASE RE-SCHEDULE.
a441	f101 INVALID FRAGMENT.
a442	f10 THAT IS NOT A VALID MACHINE ID.
a443	f579 PASSWORD MUST BE NUMBER F81 DIGITS. f173 PLEASE ENTER NEW PASSWORD f224 AND POUND SIGN.

Announcement	Fragment and Text
a444	f579 PASSWORD MUST BE NUMBER f211 TOFIFTEEN DIGITS f173 PLEASE ENTER NEW PASSWORD f224 AND POUND SIGN.
a445	f102 THAT IS NOT A VALID EXTENSION.
a446	f128 TO REQUEST ANOTHER TRANSFER, DIAL STAR-T. f129 OR LEAVE A MESSAGE FOR NAME
a447	f104 MESSAGE DELIVERED, CANNOT PLAY BACK A DELIVERED MESSAGE.
a448	f492 OWNER ERASED.
a449	f110 LIST BUTTONS
a450	f110 LIST BUTTONS f142 TO PLAY BACK THE HEADER, DIAL 3.
a451	f110 LIST BUTTONS f65 CONTAINS NUMBER IF (NUMBER<=I) THEN f84 ENTRY. ELSE f83 ENTRIES. ENDIF
a452	f110 LIST BUTTONS f65 CONTAINS NUMBER IF (NUMBER<=I) THEN f159 MEMBER. ELSE f150 MEMBERS. ENDIF

Announcement	Fragment and Text
a453	f110 LIST BUTTONS f74 DELETED.
a454	f110 LIST BUTTONS f197 CANNOT STEP BACK. f142 TO PLAY BACK THE HEADER, DIAL 3.
a455	f110 LIST BUTTONS f45 HAS NUMBER IF (NUMBER<=1) THEN f159 MEMBER. ELSE f150 MEMBERS. ENDIF f15 AND IS f226 PRIVATE
a456	f110 LIST BUTTONS f485 HAS NUMBER IF (NUMBER<=1) THEN f159 MEMBER. ELSE f150 MEMBERS. ENDIF f15 AND IS f227 PUBLIC

Announcement	Fragment and Text
a457	f110 LIST BUTTONS f494 PRIVATE. f61 TO MODIFY STATUS, DIAL "Y" FOR YES OR "N" FOR NO.
a458	f110 LIST BUTTONS f495 PUBLIC. f61 TO MODIFY STATUS, DIAL "Y" FOR YES OR "N" FOR NO.
a459	f110 LIST BUTTONS f144 DELETED, f130 BECAUSE THERE WERE NO ENTRIES.
a460	f110 LIST BUTTONS f120 TOO LARGE TO INCLUDE. f132 YOU CAN STORE YOUR LIST AS IS BY DIALING STAR-POUND OR ADD UP TO NUMBER f139 ADDITIONAL MEMBERS,
a461	f110 LIST BUTTONS f120 TOO LARGE TO INCLUDE. f132 YOU CAN STORE YOUR LIST AS IS BY DIALING STAR-POUND OR ADD UP TO NUMBER f139 ADDITIONAL MEMBERS,
a462	f110 LIST BUTTONS f120 TOO LARGE TO INCLUDE. f134 YOU CAN STORE YOUR LIST OR DELETE MEMBERS, BUT YOU CANNOT ADD MEMBERS.
a463	f110 LIST BUTTONS f120 TOO LARGE TO INCLUDE. f124 NO MORE LIST SPACE. f349 TO APPROVE LIST AS IS, DIAL POUND. f241 TO REVIEW LIST, DIAL STAR-1.

Announcement	Fragment and Text
a464	f110 LIST BUTTONS f144 DELETED,
a465	f110 LIST BUTTONS f208 IS NOT A PUBLIC LIST.
a466	f110 LIST BUTTONS f202 NOT VALID. f498 PLEASE ENTER A NEW LIST ID f224 AND POUND SIGN.
a467	f110 LIST f185 NOT FOUND.
a468	f110 LIST f185 NOT FOUND. f295 TO RE-ENTER LIST, DIAL STAR-L.
a469	f110 LIST BUTTONS f219 OWNED BY NAME f65 CONTAINS NUMBER f150 MEMBERS.
a470	f110 LIST BUTTONS f219 OWNED BY NAME f120 TOO LARGE TO INCLUDE. f132 YOU CAN STORE YOUR LIST AS IS BY DIALING STAR-POUND OR ADD UP TO NUMBER f139 ADDITIONAL MEMBERS,

<b>Announcement</b>	<b>Fragment and Text</b>
a471	f110 LIST BUTTONS f219 OWNED BY NAME f120 TOO LARGE TO INCLUDE. f134 YOU CAN STORE YOUR LIST OR DELETE MEMBERS, BUT YOU CANNOT ADD MEMBERS.
s472	f110 LIST BUTTONS f219 OWNED BY NAME f120 TOO LARGE TO INCLUDE. f124 NO MORE LIST SPACE. f349 TO APPROVE LIST AS IS, DIAL POUND. f241 TO REVIEW LIST, DIAL STAR-1.
a473	f110 LIST BUTTONS f219 OWNED BY NAME f144 DELETED,
a474	f110 LIST BUTTONS f219 OWNED BY NAME f208 IS NOT A PUBLIC LIST.
a475	f110 LIST f185 NOT FOUND.
s476	f124 NO MORE LIST SPACE. f970 TO CONTINUE REVIEWING, DIAL 3. TO DELETE AN ENTRY, DIAL STAR-D. IF FINISHED REVIEWING, DIAL POUND.
a477	f110 LIST BUTTONS f219 OWNED BY NAME f208 IS NOT A PUBLIC LIST. f295 TO RE-ENTER LIST, DIAL STAR-L.

Announcement	Fragment and Text
a478	f111 PLEASE ENTER LIST ID f224 AND POUND SIGN.
a479	f141 NO MORE LISTS.
a480	f124 NO MORE LIST SPACE. f133 TO CONTINUE REVIEWING, DIAL 3. TO DELETE AN ENTRY, DIAL STAR-D. IF FINISHED REVIEWING, DIAL STAR-POUND.
a481	f116 LIST IS FULL. f133 TO CONTINUE REVIEWING, DIAL 3. TO DELETE AN ENTRY, DIAL STAR-D. IF FINISHED REVIEWING, DIAL STAR-POUND.
a482	f116 LIST IS FULL. f349 TO APPROVE LIST AS IS, DIAL POUND. f241 TO REVIEW LIST, DIAL STAR-1.
a483	f124 NO MORE LIST SPACE. f349 TO APPROVE LIST AS IS, DIAL POUND. f241 TO REVIEW LIST, DIAL STAR-1.
a484	f113 YOU ALREADY HAVE A LIST BUTTONS f114 TO REPLACE LIST, RE-ENTER ID AND POUND SIGN. TO CREATE A NEW LIST, ENTER NEW LIST ID f224 AND POUND SIGN.
a485	f154 CANNOT CREATE NEW LIST, YOU HAVE MAXIMUM LISTS ALLOWED. TO SELECT LISTS TO BE DELETED, DIAL 5-1-2 AND FOLLOW INSTRUCTIONS.
a486	f155 CANNOT CREATE NEW LIST. TOTAL NUMBER OF MEMBERS IN ALL YOUR LISTS EQUALS MAXIMUM ALLOWED.
a487	f122 LIST SPACE NEARLY FULL. YOU MAY ENTER NUMBER f123 NEW MEMBERS.
a488	f468 TO CONTINUE PLAYING, DIAL 3.
a489	f691 LOGIN ANNOUNCEMENT FROM NAME f262 RECEIVED TIME DATE a873(NUMBER)

Announcement	Fragment and Text
a490	f691 LOGIN ANNOUNCEMENT FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) f689 EXPIRATION TIME IS TIME(2) DATE(2)
a491	f691 LOGIN ANNOUNCEMENT FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) EXTENSION
a492	f691 LOGIN ANNOUNCEMENT FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) EXTENSION f689 EXPIRATION TIME IS TIME(2) DATE(2)
a493	f697 LOGIN ANNOUNCEMENT TO ALL LOCAL SUBSCRIBERS IF (NUMBER>0) THEN f2    AND NUMBER IF (NUMBER=1) THEN f602 OTHER ELSE f217 OTHERS ENDIF ENDIF

Announcement	Fragment and Text
a494	f656 FOR LOGIN ANNOUNCEMENT OPTIONS, DIAL STAR-M.
a495	f624 LOGIN ANNOUNCEMENT.
a496	f100 INVALID ENTRY. f96 FOR HELP, DIAL STAR-H.
a497	f469 ENTER OWNER'S EXTENSION f224 AND POUND SIGN. f471 IF IT'S YOUR LIST, DIAL POUND.
a498	f470 ENTER OWNER'S LAST NAME f224 AND POUND SIGN. f471 IF IT'S YOUR LIST, DIAL POUND.
a499	f469 ENTER OWNER'S EXTENSION f224 AND POUND SIGN. f471 IF IT'S YOUR LIST, DIAL POUND.
a500	f470 ENTER OWNER'S LAST NAME f224 AND POUND SIGN. f471 IF IT'S YOUR LIST, DIAL POUND.
a501	f240 TO SKIP, DIAL POUND. TO PLAY BACK DIAL ZERO. f296 TO DELETE, DIAL STAR-D.
a502	f14 TO MAKE PRIVATE DIAL 1. TO MAKE PUBLIC, DIAL 2.
a503	f704 TO CREATE LISTS, DIAL 1. TO SCAN LISTS, DIAL 2. TO REVIEW AND MODIFY LISTS, DIAL 3.
a504	f112 PLEASE LEAVE A MESSAGE FOR NAME
a505	f152 LEAVE WORD CALLING FROM NAME f262 RECEIVED TIME DATE
a506	f152 LEAVE WORD CALLING FROM NAME f262 RECEIVED TIME DATE f86 EXTENSION BUTTONS

Announcement	Fragment and Text
a507	f474 TO PLAY BACK, DIAL ZERO. TO CHANGE OR SEND AGAIN, DIAL 1. f389 TO DELETE, DIAL STAR-D. f388 TO SKIP, DIAL POUND.
a508	f30 TO CHANGE, DIAL 1. f24 TO DELETE, DIAL STAR-D. f388 TO SKIP, DIAL POUND.
a509	f6 ENTER MACHINE IDENTIFICATION. f224 AND POUND SIGN.
a510	f153 MAXIMUM LENGTH RECORDED. TORE-RECORD, DIAL 2-1. TO APPROVE AS IS, DIAL POUND.
a511	f125 MUST BE SIX OR FEWER NUMERALS. f111 PLEASE ENTER LIST ID f224 AND POUND SIGN.
a512	f570 RECORDED NAME TOO LONG
a513	f156 MAXIMUM LENGTH RECORDED. f157 TO APPROVE AS IS, DIAL POUND.
a514	f582 AUDIX PASSWORDS MUST NOW BE AT LEAST NUMBER f81 DIGITS. f593 PLEASE CHOOSE A NEW PASSWORD OF NUMBER(2) f588 OR MORE DIGITS. f173 PLEASE ENTER NEW PASSWORD f224 AND POUND SIGN.
a515	f614 TO MAKE BROADCAST, DIAL 8.
5.516	f615 TO MAKE A LOGIN ANNOUNCEMENT, DIAL 9.
a517	f633 TO MAKE NON-INTERRUPTIBLE, DIAL 1.
a518	f613 TO MAKE PRIORITY, DIAL 2.
a519	f612 TO MAKE PRIVATE, DIAL 1.
a520	f386 CANNOT CHANGE A DELIVERED MESSAGE.
a521	f484 ENTER MORE CHARACTERS FOLLOWED BY THE POUND SIGN. IF YOU JUST COMPLETED ENTERING THE LAST NAME, ENTER THE FIRST NAME. f225 AND POUND SIGN.

Announcement	Fragment and Text
a522	f777 CANNOT PLAY BACK SYSTEM GREETING.
a523	f778 CANNOT MODIFY SYSTEM GREETING.
a524	f780 PERSONAL GREETINGS REVIEW COMPLETED.
a525	f781 TO SKIP TO THE NEXT GREETING, DIAL THE POUND SIGN. f756 TO SEE GREETING NUMBER f760 DIAL ZERO. f758 TO DELETE, DIAL STAR-D. f707 IF FINISHED, DIAL STAR-POUND.
a526	f243 REWOUND.
a527	f165 RETURNED TO GETTING MESSAGES. f21 TO PLAY BACK, DIAL ZERO. f389 TO DELETE, DIAL STAR-D. f851 TO SKIP, DIAL POUND.
a528	f91 ATEND.
a529	f844 END OF MESSAGE.
a530	f165 RETURNED TO GETTING MESSAGES. f21 TO PLAY BACK, DIAL ZERO. f255 TO DELETE THIS MESSAGE, DIAL STAR-D. f388 TO SKIP, DIAL POUND.
a531	f166 AT END. TO PLAY BACK, DIAL 2-3.
a532	f496 FILED.
a533	f167 TO APPROVE, DIAL POUND. TO RECORD FROM HERE, DIAL 1. TO PLAY BACK, DIAL 2-3.
a534	f170 DELIVERY SCHEDULED
a535	f170 DELIVERY SCHEDULED TIME DATE f66 IF CORRECT, DIAL POUND. IF NOT, DIAL STAR-D ANDRE-ENTER TIME.
a536	f631 MESSAGE WAITING NOTIFICATION ACTIVATED.
a537	f198 PARTIAL NAME DELETED.

Announcement	Fragment and Text
a538	f603 YOU ALSO HAVE f34 ELECTRONIC TEXT f168 MESSAGES.
a539	f172 YOU HAVE NEW f343 LEAVE WORD CALLING f168 MESSAGES.
a540	f603 YOU ALSO HAVE f343 LEAVE WORD CALLING f2 AND f34 ELECTRONIC TEXT f168 MESSAGES.
a541	f603 YOU ALSO HAVE f343 LEAVE WORD CALLING f2 AND f342 ELECTRONIC DOCUMENT COMMUNICATION f168 MESSAGES.
a542	f172 YOU HAVE NEW f343 LEAVE WORD CALLING f2 AND f342 ELETRONIC DOCUMENT COMMUNICATION f168 MESSAGES.
a543	f603 YOU ALSO HAVE f343 LEAVE WORD CALLING f2 AND f344 MESSAGE CENTER SERVICE f168 MESSAGES.
a544	f172 YOU HAVE NEW f343 LEAVE WORD CALLING f2 AND f344 MESSAGE CENTER SERVICE f168 MESSAGES.

Announcement	Fragment and Text
a545	f603 YOU ALSO HAVE f343 LEAVE WORD CALLING f344 MESSAGE CENTER SERVICE f2 AND f342 ELECTRONIC DOCUMENT COMMUNICATION f168 MESSAGES.
a546	f172 YOU HAVE NEW f343 LEAVE WORD CALLING f344 MESSAGE CENTER SERVICE f2 AND f342 ELECTRONIC DOCUMENT COMMUNICATION f168 MESSAGES.
a547	f603 YOU ALSO HAVE f34 ELECTRONIC TEXT f168 MESSAGES.
a548	f172 YOU HAVE NEW f34 ELECTRONIC TEXT f168 MESSAGES.
a549	f603 YOU ALSO HAVE f342 ELECTRONIC DOCUMENT COMMUNICATION f168 MESSAGES.
a550	f172 YOU HAVE NEW f342 ELECTRONIC DOCUMENT COMMUNICATION f168 MESSAGES.
a551	f603 YOU ALSO HAVE f344 MESSAGE CENTER SERVICE f168 MESSAGES.
a552	f172 YOU HAVE NEW f344 MESSAGE CENTER SERVICE f168 MESSAGES.

Announcement	Fragment and Text
a553	f603 YOU ALSO HAVE f344 MESSAGE CENTER SERVICE f2 AND f342 ELECTRONIC DOCUMENT COMMUNICATION f168 MESSAGES.
a554	f172 YOU HAVE NEW f344 MESSAGE CENTER SERVICE f2 AND f342 ELECTRONIC DOCUMENT COMMUNICATION f168 MESSAGES.
a555	f603 YOU ALSO HAVE f343 LEAVE WORD CALLING f168 MESSAGES.
a556	f928 NEW MESSAGES
a557	f600 NEW BROADCAST MESSAGES.
a558	f845 NEXT MESSAGE.
a559	f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. f67 TO CREATE ANOTHER LIST, f111 PLEASE ENTER LIST ID f224 AND POUND SIGN.
a560	f830 YOU MUST APPROVE YOUR RECORDING. f167 TO APPROVE, DIAL POUND. TO RECORD FROM HERE, DIAL 1. TO PLAY BACK, DIAL 2-3.
a561	f53 MESSAGE DELETED, NO DELIVERY WILL OCCUR.
a562	f181 NOTHING TO APPROVE.
a563	f850 BROADCAST AND LOGIN MESSAGE SERVICES ARE NOT AVAILABLE.
a564	f636 LOGIN ANNOUNCEMENT WILL BE NON-INTERRUPTIBLE.
a565	f842 ANNOUNCEMENT NOT RECORDED. TRY AGAIN LATER. f95 PLEASE DISCONNECT.
a566	f203 NO ROOM IN YOUR MAILBOX FOR A RECORDING. f62 PLEASE DELETE UNNEEDED MESSAGES

Announcement	Fragment and Text
a567	f203 NO ROOM IN YOUR MAILBOX FOR A RECORDING. f62 PLEASE DELETE UNNEEDED MESSAGES
a568	f203 NO ROOM IN YOUR MAILBOX FOR A RECORDING. f62 PLEASE DELETE UNNEEDED MESSAGES
a569	f215 NO ROOM TO RETAIN A COPY. f62 PLEASE DELETE UNNEEDED MESSAGES
a570	f559 A NAME CANNOT BE RECORDED UNTIL THE SIZE OF THE NAMES FILE SYSTEM IS INCREASED.
a571	f207 MESSAGE TOO LONG TO ADD COMMENT. TO RECORD A NEW MESSAGE, DIAL STAR-R-1.
a572	f209 CANNOT MODIFY ANOTHER SUBSCRIBER'S LIST.
a573	f92 NOTHING TO ADVANCE.
a574	f177 CANNOT PLAY BACK A DELIVERED MESSAGE.
a575	f178 NO ADDRESSEES IDENTIFIED.
a576	f178 NO ADDRESSEES IDENTIFIED. f76 DELETED.
a577	f169 ADMIN VERSION NOT SPECIFIED. PLEASE DO SO USING ADMINISTRATORS TERMINAL.
a578	f180 NOTHING TO APPROVE.
a579	f750 FOR NO-ANSWER CALLS, IF (NUMBER=0) THEN f776 THE SYSTEM GREETING ELSE f754 GREETING NUMBER ENDIF f745 ACTIVE.
a580	f181 NOTHING TO APPROVE.
a581	f181 NOTHING TO APPROVE. f13 TO RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN. f548 YOU HAVE NO ATTENDANT MENU.
a583	f609 NO ROOM TO SAVE BROADCAST MESSAGE. IT WILL BE RETAINED IN THE NEW MESSAGE CATEGORY.

Announcement	Fragment and Text
a584	f186 TO RECORD MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2.70 CHECK YOUR OUTGOING MESSAGES, DIAL 4.
a585	f182 NOTHING TO DELETE.
a586	f182 NOTHING TO DELETE. f173 PLEASE ENTER NEW PASSWORD f224 AND POUND SIGN.
a587	f714 DIRECTORY HAS NO ENTRIES.
a588	f183 NOTHING TO DELETE.
a589	f184 NOTHING TO ERASE. f13 TO RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN.
a590	f575 CANNOT FORWARD A PRIVATE MESSAGE
a591	f769 NOTHING TO APPROVE .
a592	f188 PASSWORDS DO NOT MATCH. PLEASE RE-ENTER NEW PASSWORD f224 AND POUND SIGN.
a593	f189 YOU HAVE NO MAILBOX. f272 CONTACT ADMINISTRATOR FOR HELP.
a594	f190 MESSAGE DELIVERED, YOU CANNOT CHANGE IT NOW.
a595	f191 NO MORE MESSAGES.
a596	f779 NO GREETINGS RECORDED.
a597	f192 NO MESSAGES.
a598	f193 NO NAME RECORDED.
a599	f193 NO NAME RECORDED. f608 WAIT FOR THE "GA" PROMPT, THEN TYPE YOUR NAME. WHEN YOU HAVE FINISHED TYPING YOUR NAME, DIAL 1.
a600	f194 NO NEW MESSAGES.
a601	f509 SYSTEM NOT ADMINISTERED FOR OUTCALLING.
a602	f195 NO MESSAGES.
a603	f49 NO OPERATOR DEFINED.
a604	f196 YOU HAVE NO PERSONAL GREETING.
a605	f199 NOTHING TO REWIND.
a606	f199 NOTHING TO REWIND. f256 AT BEGINNING. TORE-RECORD, DIAL 1. TO PLAY BACK, DIAL 2-3.

Announcement	Fragment and Text
a607	f199 NOTHING TO REWIND. f142 TO PLAY BACK THE HEADER, DIAL 3. f143 TO STEP BACK AGAIN, DIAL 2.
a608	f3 NO NEW REMOTE SUBSCRIBERS CAN BE ADDRESSED.
a609	f200 NO TIME ENTERED, NOTHING TO DELETE. f22 TO DELIVER NOW, DIAL POUND. OR, TO SCHEDULE DELIVERY TIME USE THE TELEPHONE KEYS TO ENTER HOUR, MINUTES, A OR P, AND POUND SIGN.
a610	f571 NON-EXISTENT SUBSCRIBER
a611	f232 RECORDING STOPPED. f181 NOTHING TO APPROVE.
a612	f173 PLEASE ENTER NEW PASSWORD f224 AND POUND SIGN.
a613	f267 PLEASE ENTER EXTENSION f224 AND POUND SIGN. f237 OR DIAL STAR-R.
a614	f510 NUMBER f202 NOT VALID.
a615	f510 NUMBER f202 NOT VALID. f95 PLEASE DISCONNECT.
a616	f535 FOR OUTCALLING ANY TIME, DIAL 1. FOR OUTCALLING DURING PRIME TIME, DIAL 2. TO SPECIFY YOUR TIMES, DIAL 3. FOR SYSTEM OUTCALLING SCHEDULE, DIAL 4.
a617	f530 OUTCALLING f522 TURNED OFF. TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R
a618	f530 OUTCALLING f521 TURNED ON f835 FOR ALL NEW MESSAGES
a619	f530 OUTCALLING f521 TURNED ON f836 ONLY FOR NEW PRIORITY MESSAGES

<b>Announcement</b>	<b>Fragment and Text</b>
a620	<p>f532 TO CHANGE YOUR OUTCALLING PHONE NUMBER, DIAL 1 AND ENTER THE NUMBER TO BE CALLED FOLLOWED BY THE POUND SIGN. ANYTHING YOU ENTER WILL BE INTERPRETED AS PART OF THE CALLED NUMBER. NO GLOBAL COMMANDS SUCH AS STAR-H WILL BE ACCEPTED AT THIS TIME.</p> <p>f557 IN MOST CASES, ENTERING A STAR OR POUND AS THE FIRST DIGIT WILL RESULT IN THE STAR OR POUND BEING OUTPULSED. A STAR ENTERED AS PART OF THE DIGIT STRING WILL BE INTERPRETED AS A PAUSE OF ONE AND A HALF SECONDS. IF A LONGER PAUSE IS REQUIRED, USE MULTIPLE STARS IN A ROW.</p> <p>f560 IF YOU ARE PROGRAMMING A NUMBER TO CALL A PAGER THAT REQUIRES A POUND SIGN TERMINATION, DIAL "Y" TO RECEIVE FURTHER HELP. OTHERWISE, DIAL "N" TO RETURN TO OUTCALLING ADMINISTRATION.</p>
a621	<p>f531 ENTER OUTCALLING NUMBER</p> <p>f224 AND POUND SIGN.</p> <p>f556 TO EXIT, DIAL STAR-POUND NOW.</p>
a622	<p>f589 FOR PAGERS REQUIRING A POUND SIGN TERMINATION, START YOUR NUMBER WITH A DOUBLE POUND SIGN. THIS WILL RESULT IN A SINGLE POUND BEING OUTPULSED AT THE END OF THE DIGIT STRING. THEN, A STAR OR POUND IN THE NEXT POSITION WILL BE INTERPRETED AS PART OF THE OUTCALLING NUMBER.</p> <p>f590 A STAR ENTERED AS PART OF THE DIGIT STRING WILL BE INTERPRETED AS A PAUSE OF ONE AND A HALF SECONDS. IF A LONGER PAUSE IS REQUIRED, USE MULTIPLE STARS IN A ROW.</p>
a623	<p>f534 YOUR OUTCALLING NUMBER IS</p> <p>DIALSTR</p>
a624	<p>f544 OUTCALLING SPECIFIED FOR</p> <p>f525 ANY TIME</p> <p>f526 SUBJECT TO ADMINISTRATOR RESTRICTIONS</p>

Announcement	Fragment and Text
a625	f544 OUTCALLING SPECIFIED FOR TIME f524 TO TIME(2) f526 SUBJECT' TO ADMINISTRATOR RESTRICTIONS
a626	f544 OUTCALLING SPECIFIED FOR TIME f524 TO TIME(2) f526 SUBJECT TO ADMINISTRATOR RESTRICTIONS f66 IF CORRECT, DIAL POUND. IF NOT, DIAL STAR-D ANDRE-ENTER TIME.
a627	f500 THIS IS AUDIX. NAME f172 YOU HAVE NEW f168 MESSAGES. f551 TO ACCESS YOUR MESSAGES, f278 PLEASE ENTER EXTENSION f224 AND POUND SIGN. f543 TO AVOID FURTHER NOTIFICATION OF THESE MESSAGES, DIAL STAR-POUND.
a628	f519 YOU ARE NOT AUTHORIZED FOR OUTCALLING.
a629	f520 YOUR OUTCALLING NUMBER, DIALSTR f522 TURNED OFF. TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R f527 TO CHANGE NUMBER, DIAL 1. TO CHANGE TIMES, DIAL 2. FOR INSTRUCTIONS ON ENTERING YOUR OUTCALLING NUMBER, DIAL 3. f528 TO TURN ON, DIAL "Y". TO TURN OFF, DIAL "N".

Announcement	Fragment and Text
a630	f520 YOUR OUTCALLING NUMBER, DIALSTR f521 TURNED ON f835 FOR ALL NEW MESSAGES f523 FOR f525 ANY TIME f526 SUBJECT TO ADMINISTRATOR RESTRICTIONS f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. f527 TO CHANGE NUMBER, DIAL 1. TO CHANGE TIMES, DIAL 2. FOR INSTRUCTIONS ON ENTERING YOUR OUTCALLING NUMBER, DIAL 3. f528 TO TURN ON, DIAL "Y". TO TURN OFF, DIAL "N".
a631	f520 YOUR OUTCALLING NUMBER, DIALSTR f521 TURNED ON f835 FOR ALL NEW MESSAGES f523 FOR TIME f524 TO TIME(2) f526 SUBJECT TO ADMINISTRATOR RESTRICTIONS f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. f527 TO CHANGE NUMBER, DIAL 1. TO CHANGE TIMES, DIAL 2. FOR INSTRUCTIONS ON ENTERING YOUR OUTCALLING NUMBER, DIAL 3. f528 TO TURN ON, DIAL "Y". TO TURN OFF, DIAL "N".
a632	f520 YOUR OUTCALLING NUMBER, DIALSTR f521 TURNED ON f836 ONLY FOR NEW PRIORITY MESSAGES f523 FOR f525 ANY TIME f526 SUBJECT TO ADMINISTRATOR RESTRICTIONS f105 TO RESTART AT THE ACTIVITYMENU, DIAL STAR-R. f527 TO CHANGE NUMBER, DIAL 1. TO CHANGE TIMES, DIAL 2. FOR INSTRUCTIONS ON ENTERING YOUR OUTCALLING NUMBER, DIAL 3. f528 TO TURN ON, DIAL "Y". 17) TURN OFF, DIAL "N".

Announcement	Fragment and Text
a633	f520 YOUR OUTCALLING NUMBER, DIALSTR f521 TURNED ON f836 ONLY FOR NEW PRIORITY MESSAGES f523 FOR TIME f524 TO TIME(2) f526 SUBJECT TO ADMINISTRATOR RESTRICTIONS f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. f527 TO CHANGE NUMBER, DIAL 1. TO CHANGE TIMES, DIAL 2. FOR INSTRUCTIONS ON ENTERING YOUR OUTCALLING NUMBER, DIAL 3. f528 TO TURN ON, DIAL "Y". TO TURN OFF, DIAL "N".
a634	f837 TO TURN ON OUTCALLING FOR ALL NEW MESSAGES, DIAL 1. TO TURN ON OUTCALLING ONLY FOR NEW PRIORITY MESSAGES, DIAL 2.
a635	f929 OLD MESSAGES
a636	f840 OPTION f841 NOT DEFINED
a637	f216 ORIGINALLY f260 SCHEDULED FOR TIME DATE f261 RESCHEDULED FOR TIME(2) DATE(2) IF (NUMBER=1) THEN f264 MESSAGE NOT DELIVERED BECAUSE MAILBOX WAS FULL. ELSE f265 MESSAGE NOT DELIVERED BECAUSE THEIR MAILBOXES WERE FULL. ENDIF

Announcement	Fragment and Text
a638	f216 ORIGINALLY f260 SCHEDULED FOR TIME DATE f261 RESCHEDULED FOR TIME(2) DATE(2) f265 MESSAGE NOT DELIVERED BECAUSE THEIR MAILBOXES WERE FULL. f689 EXPIRATION TIME IS TIME(3) DATE(3)
a639	f216 ORIGINALLY f260 SCHEDULED FOR TIME DATE f261 RESCHEDULED FOR TIME(2) DATE(2) f98 MESSAGE NOT DELIVERED DUE TO TRANSMISSION PROBLEMS.
a640	f216 ORIGINALLY f260 SCHEDULED FOR TIME DATE f261 RESCHEDULED FOR TIME(2) DATE(2) f98 MESSAGE NOT DELIVERED DUE TO TRANSMISSION PROBLEMS. f689 EXPIRATION TIME IS TIME(3) DATE(3)

Announcement	Fragment and Text
a641	f216 ORIGINALLY f260 SCHEDULED FOR TIME DATE f261 RESCHEDULED FOR TIME(2) DATE(2) f387 MESSAGE NOT DELIVERED BECAUSE RECIPIENT' NOT FOUND.
a642	f216 ORIGINALLY f260 SCHEDULED FOR TIME DATE f261 RESCHEDULED FOR TIME(2) DATE(2) f387 MESSAGE NOT DELIVERED BECAUSE RECIPIENT NOT FOUND. f689 EXPIRATION TIME IS TIME(3) DATE(3)
a643	f216 ORIGINALLY f260 SCHEDULED FOR TIME DATE f261 RESCHEDULED FOR TIME(2) DATE(2) f584 MESSAGE NOT DELIVERED BECAUSE SPECIAL FEATURE DENIED ON RECIPIENT'S MACHINE.
a644	f216 ORIGINALLY f260 SCHEDULED FOR T I M E DATE f261 RESCHEDULED FOR TIME(2) DATE(2) f584 MESSAGE NOT DELIVERED BECAUSE SPECIAL FEATURE DENIED ON RECIPIENT'S MACHINE. f689 EXPIRATION TIME IS TIME(3) DATE(3)

Announcement	Fragment and Text
a645	f751 FOR OUT-OF-HOURS CALLS, IF (NUMBER=0) T H E N f776 THE SYSTEM GREETING ELSE f754 GREETING NUMBER ENDIF f745 ACTIVE.
a646	f220 ENTER PASSWORD f224 AND POUND SIGN.
a647	f681 SORRY, CANNOT LEAVE A MESSAGE NOW BECAUSE THIS USER'S MAILBOX IS FULL.
a648	f214 APPROVED.
a649	f1 SOMEONE IS CHANGING YOUR GREETING, PLEASE TRY AGAIN LATER.
a650	f607 NAME CANNOT BE SAVED AT THIS TIME, PLEASE CONTINUE
a651	f720 ALIAS ENTERED NOT FOLLOWED BY POUND AND NOT ADDED TO THE DIRECTORY.
a652	f719 EXTENSION ENTERED NOT FOLLOWED BY POUND AND NOT ADDED TO THE DIRECTORY.
a653	f718 NAME ENTERED NOT FOLLOWED BY POUND AND NOT ADDED TO THE DIRECTORY.
a654	f37 EXTENSION ENTERED NOT FOLLOWED BY POUND f187 AND NOT ADDED TO THE LIST. f464 ENTER EXTENSIONS f135 AND POUND SIGN. f349 TO APPROVE LIST AS IS, DIAL POUND.
a655	f38 NAME ENTERED NOT FOLLOWED BY POUND f187 AND NOT ADDED TO THE LIST. f465 ENTER LAST NAME f135 AND POUND SIGN. f349 TO APPROVE LIST AS IS, DIAL POUND.

Announcement	Fragment and Text
a656	f798 PRIME TIME IS TIME f524 TO TIME(2)
a657	f798 PRIME TIME IS TIME f524 TO TIME(2) f788 TO IDENTIFY CALLS AS OUT-OF-HOURS, DIAL 3. f789 OTHERWISE, DIAL 4.
a658	f226 PRIVATE f47 CALL FROM NAME f262 RECEIVED TIME DATE a873(NUMBER)
a659	f226 PRIVATE f47 CALL FROM NAME f262 RECEIVED TIME DATE f86 EXTENSION BUTTONS a873(NUMBER)
a660	f226 PRIVATE f50 CALL NAME f262 RECEIVED TIME DATE f86 EXTENSION BUTTONS a873(NUMBER)

Announcement	Fragment and Text
a661	f226 PRIVATE f50 CALL f262 RECEIVED T I M E DATE a873(NUMBER)
a662	f226 PRIVATE f110 LIST
a663	f686 PRIVATE MESSAGE FROM NAME f262 RECEIVED T I M E DATE a873(NUMBER)
a664	f686 PRIVATE MESSAGE FROM NAME f262 RECEIVED T I M E DATE a873(NUMBER) f689 EXPIRATION TIME IS TIME(2) DATE(2)
a665	f686 PRIVATE MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) EXTENSION

Announcement	Fragment and Text
a666	f686 PRIVATE MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) EXTENSION f689 EXPIRATION TIME IS TIME(2) DATE(2)
a667	f918 TO RE-SCHEDULE DELIVERY, DIAL 3.
a668	f690 PRIORITY MESSAGE FROM NAME f262 RECEIVED T I M E DATE a873(NUMBER)
a669	f690 PRIORITY MESSAGE FROM N A M E f262 RECEIVED T I M E DATE a873(NUMBER) f689 EXPIRATION TIME IS TIME(2) DATE(2)
a670	f690 PRIORITY MESSAGE FROM NAME f262 RECEIVED T I M E DATE a873(NUMBER) EXTENSION

Announcement	Fragment and Text
a671	f690 PRIORITY MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) EXTENSION f689 EXPIRATION TIME IS TIME(2) DATE(2)
a672	f919 TO FILE A COPY, DIAL 4.
a673	f698 PRIORITY MESSAGE TO NAME IF (NUMBER>0) THEN f2   AND NUMBER IF (NUMBER=1) THEN f602 OTHER ELSE f217 OTHERS ENDIF ENDIF
a674	f227 PUBLIC f110 LIST
a675	f694   PRIVATE, BROADCAST MESSAGE TO ALL LOCAL SUBSCRIBERS IF (NUMBER>0) THEN f2   AND NUMBER IF (NUMBER=1) THEN f602 OTHER ELSE f217 OTHERS ENDIF ENDIF

<b>Announcement</b>	<b>Fragment and Text</b>
a676	f685 PRIVATE, PRIORITY MESSAGE FROM NAME f262 RECEIVED T I M E DATE a873(NUMBER)
a677	f685 PRIVATE, PRIORITY MESSAGE FROM NAME f262 RECEIVED T I M E DATE a873(NUMBER) f689 EXPIRATION TIME IS TIME(2) DATE(2)
a678	f685 PRIVATE, PRIORITY MESSAGE FROM NAME f262 RECEIVED T I M E DATE a873(NUMBER) EXTENSION
a679	f685 PRIVATE, PRIORITY MESSAGE FROM NAME f262 RECEIVED T I M E DATE a873(NUMBER) EXTENSION f689 EXPIRATION TIME IS TIME(2) DATE(2)
a680	f242 RETURNED TO THE f57 ACCESSED f164 CATEGORY. f142 TO PLAY BACK THE HEADER, DIAL 3.

<b>Announcement</b>	<b>Fragment and Text</b>
a681	f242 RETURNED TO THE f59 DELIVERED f164 CATEGORY. f142 TO PLAY BACK THE HEADER, DIAL 3.
a682	f242 RETURNED TO THE f473 FILED f164 CATEGORY. f142 TO PLAY BACK THE HEADER, DIAL 3.
a683	f242 RETURNED TO THE f63 NEW f164 CATEGORY. f142 TO PLAY BACK THE HEADER, DIAL 3.
a684	f242 RETURNED TO THE f64 OLD f164 CATEGORY. f142 TO PLAY BACK THE HEADER, DIAL 3.
a685	f242 RETURNED TO THE f68 UNDELIVERABLE f164 CATEGORY. f142 TO PLAY BACK THE HEADER, DIAL 3.
a686	f242 RETURNED TO THE f69 UNDELIVERED f164 CATEGORY. f142 TO PLAY BACK THE HEADER, DIAL 3.
a687	f242 RETURNED TO THE f70 UNOPENED f164 CATEGORY. f142 TO PLAY BACK THE HEADER, DIAL 3.
a688	f228 PLEASE WAIT FOR THE "GA" PROMPT.
a689	f229 YOU WILL HAVE UP TO NUMBER f230 SECONDS TO RECORD.

<b>Announcement</b>	<b>Fragment and Text</b>
a690	f604 AS YOU USE AUDIX YOUR NAME WILL BE INCLUDED IN SYSTEM ANNOUNCEMENTS THAT YOU AND OTHER TDD USERS WILL SEE. DIAL 1, WAIT FOR THE "GA" PROMPT, AND THEN TYPE YOUR NAME ON YOUR TDD. AFTER TYPING YOUR NAME, DIAL 1 AGAIN.
a691	f232 RECORDING STOPPED.
a692	f232 RECORDING STOPPED. f193 NO NAME RECORDED. f608 WAIT FOR THE "GA" PROMPT, THEN TYPE YOUR NAME. WHEN YOU HAVE FINISHED TYPING YOUR NAME, DIAL 1.
a693	f46 TO REPLY TO SENDER BY MAIL, DIAL 1. f18 TO FORWARD WITH COMMENT, DIAL 2. f8 TO RECORD A NEW MESSAGE, DIAL 4.
a694	f127 RETURNED TO PREVIOUS ACTIVITY. f96 FOR HELP, DIAL STAR-H.
a695	f19 TO REVIEW FROM BEGINNING, DIAL STAR-1. IF FINISHED, DIAL STAR-POUND.
a696	f147 REVIEW COMPLETED.
a697	f147 REVIEW COMPLETED. f569 TO MODIFY, DIAL 1. IF FINISHED, DIAL STAR-POUND.
a698	f147 REVIEW COMPLETED. f19 TO REVIEW FROM BEGINNING, DIAL STAR-1. IF FINISHED, DIAL STAR-POUND.
a699	f256 AT BEGINNING. TORE-RECORD, DIAL 1. TO PLAY BACK, DIAL 2-3.
a700	f619 TO REMOVE BROADCAST STATUS, DIAL 8.
a701	f620 TO REMOVE LOGIN ANNOUNCEMENTSTATUS, DIAL 9.
a702	f635 TO REMOVE NON-INTERRUPTIBLE STATUS, DIAL 1.
a703	f796 TO REMOVE OUT-OF-HOURS IDENTIFICATION, DIAL 4.
a704	f618 TO REMOVE PRIORITY STATUS, DIAL 2.
a705	f617 TO REMOVE PRIVATE STATUS, DIAL 1.
a706	f244 REWOUND TO PREVIOUS MESSAGE. f142 TO PLAY BACK THE HEADER, DIAL 3.
a707	f802 CANNOT SEND A MESSAGE TO THE BROADCAST MAILBOX.

Announcement	Fragment and Text
a708	f245 PLEASE RETURN CALL.
a709	f245 PLEASE RETURN CALL. f86 EXTENSION BUTTONS
a710	f785 SAME GREETING USED FOR ALL CALLS.
a711	f785 SAME GREETING USED FOR ALL CALLS. f786 TO IDENTIFY CALLS AS INTERNAL AND EXTERNAL, DIAL 1. f787 TO IDENTIFY CALLS AS BUSY AND NO-ANSWER, DIAL 2.
a712	f511 IF YOU DO NOT HAVE A TOUCHTONE TELEPHONE, f236 TRY AGAIN f109 LATER. f514 OTHERWISE f274 PLEASE MAKE ENTRY SOON, OR BE DISCONNECTED.
a713	f248 SCHEDULED TIME DATE f249 TO CHANGE DELIVERY TIME, DIAL STAR-D. TO APPROVE, DIAL POUND.
a714	f250 TO CHANGE DELIVERY TIME, DIAL STAR-D.
a715	f22 TO DELIVER NOW, DIAL POUND. OR, TO SCHEDULE DELIVERY TIME, USE THE TELEPHONE KEYS TO ENTER HOUR, MINUTES, A OR P, AND POUND SIGN.
a716	f629 PLEASE ENTER MONTH, DAY, AND POUND SIGN.
a717	f477 DIAL 1 TO SELECT NAME
a718	f478 DIAL 2 TO SELECT' NAME
a719	f479 DIAL 3 TO SELECT NAME f480 DIAL 4 TO SELECT NAME
a721	f481 DIAL 5 TO SELECT NAME
a722	f23 TO RECORD MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO ADMINISTER YOUR GREETING, DIAL 3.
a723	f501 TO RECORD MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO ADMINISTER ATTENDANT MENU, DIAL 3.

<b>Announcement</b>	<b>Fragment and Text</b>
a724	f482 DIAL POUND TO SELECT NAME f483 OR ENTER MORE CHARACTERS f225 AND POUND SIGN. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a725	f482 DIAL POUND TO SELECT N A M E f483 OR ENTER MORE CHARACTERS f225 AND POUND SIGN.
a726	f482 DIAL POUND TO SELECT NAMEEXT f483 OR ENTER MORE CHARACTERS f225 AND POUND SIGN. f235 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a727	f257 TO USE PERSONAL GREETING, DIAL "Y". TO USE SYSTEM GREETING, DIAL "N".
a728	f775 TO RECORD MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO ADMINISTER PERSONAL GREETINGS, DIAL 3.
a729	f674 DUE TO SENDING RESTRICTIONS, YOU CANNOT SEND MESSAGES TO NAME
a730	f388 TO SKIP, DIAL POUND.
a731	f626 TO SPECIFY EXPIRATION DATE, DIAL 2.
a732	f626 TO SPECIFY EXPIRATION DATE, DIAL 2. f634 TO APPROVE LOGIN ANNOUNCEMENT OPTIONS, DIAL POUND.

Announcement	Fragment and Text
a733	f243 REWOUND. f142 TO PLAY BACK THE HEADER, DIAL 3. f143 TO STEP BACK AGAIN, DIAL 2.
a734	f537 ENTER THE STARTING HOUR, MINUTES, "A" OR "P", AND POUND SIGN.
a735	f466 CREATED TIME DATE
a736	f259 SCHEDULED FOR TIME DATE
a737	f259 SCHEDULED FOR TIME DATE f689 EXPIRATION TIME IS TIME(2) DATE(2)
a738	f260 SCHEDULED FOR TIME DATE f730 MESSAGE NOT DELIVERED BECAUSE THE BROADCAST MAILBOX WAS NOT DEFINED.
a739	f260 SCHEDULED FOR TIME DATE f699 MESSAGE NOT DELIVERED BECAUSE ANOTHER LOGIN ANNOUNCEMENT' IS ACTIVE.
a740	f260 SCHEDULED FOR TIME DATE f738 MESSAGE NOT DELIVERED DUE TO SENDING RESTRICTIONS.
a741	f260 SCHEDULED FOR TIME DATE f98 MESSAGE NOT DELIVERED DUE TO TRANSMISSION PROBLEMS.

Announcement	Fragment and Text
a742	f260 SCHEDULED FOR TIME DATE f387 MESSAGE NOT DELIVERED BECAUSE RECIPIENT NOT FOUND.
a743	f260 SCHEDULED FOR TIME DATE f584 MESSAGE NOT DELIVERED BECAUSE SPECIAL FEATURE DENIED ON RECIPIENT'S MACHINE.
a744	f260 SCHEDULED FOR TIME DATE f264 MESSAGE NOT DELIVERED BECAUSE MAILBOX WAS FULL.
a745	f262 RECEIVED T I M E DATE
a746	f262 RECEIVED TIME DATE f689 EXPIRATION TIME IS TIME(2) DATE(2)
a747	f21 TO PLAY BACK, DIAL ZERO. f24 TO DELETE, DIAL STAR-D. f388 TO SKIP, DIAL POUND.
a748	f920 TO NOT FILE A COPY, DIAL 4.
a749	f472 TO APPROVE, DIAL POUND. TO RECORD FROM HERE, DIAL 1. f468 TO CONTINUE PLAYING, DIAL 3.
a750	f499 WHEN FINISHED RECORDING, DIAL POUND TO APPROVE, OR 1 TO EDIT YOUR MESSAGE.
a751	f475 TO FILE A COPY, DIAL "Y" FOR YES OR "N" FOR NO.
a752	f977 NAME NOT FOUND.
a754	f270 SUBSCRIBER ID f202 NOT VALID.

Announcement	Fragment and Text
a755	f700 TO ADMINISTER MAILING LISTS, DIAL 1. TO ADMINISTER PERSONAL DIRECTORY, DIAL 2. f701 TO CHANGE YOUR PASSWORD, DIAL 4.
a756	f700 TO ADMINISTER MAILING LISTS, DIAL 1. TO ADMINISTER PERSONAL DIRECTORY, DIAL 2. f701 TO CHANGE YOUR PASSWORD, DIAL 4. f702 TO RECORD YOUR NAME, DIAL 5.
a757	f26 TO RECORD NAMES, DIAL 4. TO PLAY NAMES, DIAL 5. TO RECORD MACHINE NAMES, DIAL 6. TO PLAY MACHINE NAMES, DIAL 7.
a758	f539 THE SYSTEM ALLOWS OUTCALLS FROM TIME f524 TO TIME(2)
a759	f18 TO FORWARD WITH COMMENT, DIAL 2. f8 TO RECORD A NEW MESSAGE, DIAL 4. f163 TO CALL SENDER, DIAL ZERO.
a760	f486 TO REPLY TO SENDER BY MAIL, DIAL 1. f8 TO RECORD A NEW MESSAGE, DIAL 4. f163 TO CALL SENDER, DIAL ZERO.
a761	f8 TO RECORD A NEW MESSAGE, DIAL 4. f163 TO CALL SENDER, DIAL ZERO.
a762	f274 PLEASE MAKE ENTRY SOON, OR BE DISCONNECTED.
a763	f96 FOR HELP, DIAL STAR-H. f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT' AUDIX, DIAL STAR-STAR-X. f274 PLEASE MAKE ENTRY SOON, OR BE DISCONNECTED.
a764	f533 TOO MANY DIGITS.
a765	f276 TIME REQUESTED HAS PASSED. PLEASE RE-SCHEDULE DELIVERY. f22 TO DELIVER NOW, DIAL POUND. OR, TO SCHEDULE DELIVERY TIME, USE THE TELEPHONE KEYS TO ENTER HOUR, MINUTES, A OR P, AND POUND SIGN.
a766	f275 CANNOT GET YOUR MESSAGES NOW, DUE TO MULTIPLE LOGINS TO YOUR MAILBOX. f95 PLEASE DISCONNECT.

Announcement	Fragment and Text
a767	f695 PRIVATE, PRIORITY MESSAGE TO NAME IF (NUMBER>0) THEN f2  AND NUMBER IF (NUMBER=1) THEN f602 OTHER ELSE f217 OTHERS ENDIF ENDIF
a768	f486 TO REPLY TO SENDER BY MAIL, DIAL 1. f18  TO FORWARD WITH COMMENT, DIAL 2. f8   TO RECORD A NEW MESSAGE, DIAL 4. f163 TO CALL SENDER, DIAL ZERO.
a769	f128 TO REQUEST ANOTHER TRANSFER, DIAL STAR-T.
a770	f118 ENTER LAST NAME f224 AND POUND SIGN. f175 PLEASE NOTE ONLY AUDIX SUBSCRIBERS CAN BE SPECIFIED BY NAME. f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO. f251 TO TRANSFER USING EXTENSION INSTEAD, DIAL STAR-A.
a771	f118 ENTER LAST NAME f224 AND POUND SIGN. f175 PLEASE NOTE ONLY AUDIX SUBSCRIBERS CAN BE SPECIFIED BY NAME. f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO. f251 TO TRANSFER USING EXTENSION INSTEAD, DIAL STAR-A. f335 WHEN FINISHED, DIAL POUND.
a772	f512 YOUR CALL IS BEING TRANSFERRED TO AN OPERATOR.

Announcement	Fragment and Text
a773	f118 ENTER LAST NAME f224 AND POUND SIGN. f251 TO TRANSFER USING EXTENSION INSTEAD, DIAL STAR-A.
a774	f118 ENTER LAST NAME f224 AND POUND SIGN. f251 TO TRANSFER USING EXTENSION INSTEAD, DIAL STAR-A. f335 WHEN FINISHED, DIAL POUND.
a775	f515 TO BE TRANSFERRED TO AN OPERATOR, f380 PLEASE WAIT.
a776	f933 UNDELIVERABLE MESSAGES
a777	f934 UNDELIVERED MESSAGES
a778	f688 AN UNDELIVERABLE MESSAGE WAS RETURNED TO YOUR OUTGOING MAILBOX. TO ACCESS YOUR OUTGOING MAILBOX, DIAL STAR-R-4.
a779	f687 UNDELIVERABLE MESSAGE NOTIFICATION RECEIVED TIME DATE
a780	f935 UNOPENED MESSAGES
a781	f541 UP TO NUMBER f542 DIGITS MAYBE USED.
a782	f278 PLEASE ENTER EXTENSION f224 AND POUND SIGN.
a783	f766 TO USE THIS GREETING FOR ALL CALLS, DIAL 1. f913 IF FINISHED, DIAL POUND.
a784	f783 TO ACTIVATE ANOTHER GREETING, ENTER GREETING NUMBER. TO DEACTIVATE A GREETING, ACTIVATE A DIFFERENT GREETING IN ITS PLACE. f784 TO ACTIVATE SYSTEM GREETING, DIAL ZERO. f913 IF FINISHED, DIAL POUND.
a785	f767 TO USE THIS GREETING FOR ALL CALLS, DIAL ZERO. FOR BUSY CALLS, DIAL 1. FOR NO-ANSWER CALLS, DIAL 2.
a786	f767 TO USE THIS GREETING FOR ALL CALLS, DIAL ZERO. FOR BUSY CALLS, DIAL 1. FOR NO-ANSWER CALLS, DIAL 2. f913 IF FINISHED, DIAL POUND.
a787	f764 TO USE THIS GREETING FOR ALL CALLS, DIAL ZERO. FOR INTERNAL CALLS, DIAL 1. FOR EXTERNAL CALLS, DIAL 2.

Announcement	Fragment and Text
a788	f764 TO USE THIS GREETING FOR ALL CALLS, DIAL ZERO. FOR INTERNAL CALLS, DIAL 1. FOR EXTERNAL CALLS, DIAL 2. f913 IF FINISHED, DIAL POUND.
a789	f782 TO ACTIVATE A GREETING, ENTER GREETING NUMBER. TO DEACTIVATE A GREETING, ACTIVATE A DIFFERENT GREETING IN ITS PLACE. f784 TO ACTIVATE SYSTEM GREETING, DIAL ZERO. f913 IF FINISHED, DIAL POUND.
a790	f331 PERSONAL GREETING USED.
a791	f797 TO USE SAME GREETING FOR ALL CALLS, DIAL 5. f913 IF FINISHED, DIAL POUND.
a792	f332 SYSTEM GREETING USED.
a793	f332 SYSTEM GREETING USED. f823 FOR ALL CALLS
a794	f332 SYSTEM GREETING USED. f827 FOR BUSY f2 AND f812 NO-ANSWER f814 CALLS.
a795	f332 SYSTEM GREETING USED. f827 FOR BUSY f813 AND OUT-OF-HOURS f814 CALLS.
a796	f332 SYSTEM GREETING USED. f827 FOR BUSY f814 CALLS.
a797	f332 SYSTEM GREETING USED. f827 FOR BUSY f812 NO-ANSWER f813 AND OUT-OF-HOURS f814 CALLS.

<b>Announcement</b>	<b>Fragment and Text</b>
a798	f332 SYSTEM GREETING USED. f826 FOR EXTERNAL f813 AND OUT-OF-HOURS f814 CALLS.
a799	f332 SYSTEM GREETING USED. f826 FOR EXTERNAL f814 CALLS.
a800	f332 SYSTEM GREETING USED. f825 FOR INTERNAL f2 AND f810 EXTERNAL f814 CALLS.
a801	f332 SYSTEM GREETING USED. f825 FOR INTERNAL f813 AND OUT-OF-HOURS f814 CALLS.
a802	f332 SYSTEM GREETING USED. f825 FOR INTERNAL f814 CALLS.
a803	f332 SYSTEM GREETING USED. f825 FOR INTERNAL f810 EXTERNAL f813 AND OUT-OF-HOURS f814 CALLS.
a804	f332 SYSTEM GREETING USED. f828 FOR NO-ANSWER f813 AND OUT-OF-HOURS f814 CALLS.
a805	f332 SYSTEM GREETING USED. f828 FOR NO-ANSWER f814 CALLS.
a806	f332 SYSTEM GREETING USED. f829 FOR OUT-OF-HOURS f814 CALLS.
a807	f279 ENTER ANNOUNCEMENT SET AND FOUND SIGN.

Announcement	Fragment and Text
a808	f281 MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER)
a809	f281 MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) f689 EXPIRATION TIME IS TIME(2) DATE(2)
a810	f281 MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) EXTENSION
a811	f281 MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER) EXTENSION f689 EXPIRATION TIME IS TIME(2) DATE(2)
a812	f87 THIS CALL IS EXPERIENCING DIFFICULTIES. f1007 TO PLAY BACK, DIAL 2-3.
a813	f380 PLEASE WAIT.

Announcement	Fragment and Text
a814	f283 YOUR MAILBOX IS MORE THAN NUMBER f284 PERCENT FULL. PLEASE DELETE UNNEEDED MESSAGES OR GREETINGS.
a815	f287 WELCOME TO AUDIX. f97 FOR HELP AT ANY TIME, DIAL STAR-H.
a816	f179 WARNING, IF YOU DO NOT SUPPLY AN ADDRESSEE LIST, MESSAGE WILL BE DELETED IMMEDIATELY.
a817	f293 NOTHING TO PLAY BACK.
a818	a902(NUMBER(1)) a903(NUMBER(2)) a904(NUMBER(1)) NUMBER(2))
a819	T I M E f253 PLEASE ENTER MONTH, DAY f224 AND POUND SIGN.
a820	IF (NUMBER<=60) THEN (f390+NUMBER) ELSE IF (NUMBER<=100) T H E N (f450+((NUMBER-60)/10)) IF (NUMBER%10>0) THEN (f390+(NUMBER%10)) ENDIF ELSE a901(NUMBER) ENDIF ENDIF

Announcement	Fragment and Text
a821	f86 EXTENSION BUTTONS
a822	f20 REMOTE EXTENSION BUTTONS
a823	f463 STAR
a824	f462 POUND
a825	f546 PAUSE
a826	f277 TO EXIT DIRECTORY, DIAL POUND.
a827	f42 DIAL POUND TO SELECT NAMEEXT f43 OR ENTER MORE CHARACTERS
a828	f764 TO USE THIS GREETING FOR ALL CALLS, DIAL ZERO. FOR INTERNAL CALLS, DIAL 1. FOR EXTERNAL CALLS, DIAL 2. f773 TO ACTIVATE FOR OUT-OF-HOURS CALLS, DIAL 3. f913 IF FINISHED, DIAL POUND.
a829	f767 TO USE THIS GREETING FOR ALL CALLS, DIAL ZERO. FOR BUSY CALLS, DIAL 1. FOR NO-ANSWER CALLS, DIAL 2. f773 TO ACTIVATE FOR OUT-OF-HOURS CALLS, DIAL 3. f913 IF FINISHED, DIAL POUND.
a830	f818 YOU HAVE JUST RECORDED f754 GREETING NUMBER
a831	f658 MESSAGE WAITING NOTIFICATION IS CURRENTLY NOT ACTIVE. f625 TO ACTIVATE MESSAGE WAITING NOTIFICATION, DIAL 1. f659 MESSAGE WAITING NOTIFICATION WILL ALERT ALL LOCAL SUBSCRIBERS ABOUT THIS MESSAGE. THIS OPTION SHOULD BE USED SPARINGLY, BECAUSE IT CAN IMPACT SYSTEM PERFORMANCE. f626 TO SPECIFY EXPIRATION DATE, DIAL 2.
a832	f628 TO DEACTIVATE MESSAGE WAITING NOTIFICATION, DIAL 1. f626 TO SPECIFY EXPIRATION DATE, DIAL 2. f627 TO APPROVE BROADCAST OPTIONS, DIAL POUND.
a833	f625 TO ACTIVATE MESSAGE WAITING NOTIFICATION, DIAL 1. f626 TO SPECIFY EXPIRATION DATE, DIAL 2. f627 TO APPROVE BROADCAST OPTIONS, DIAL POUND.

Announcement	Fragment and Text
a834	f87 THIS CALL IS EXPERIENCING DIFFICULTIES. f236 TRY AGAIN f109 LATER. f95 PLEASE DISCONNECT.
a835	f267 PLEASE ENTER EXTENSION f224 AND POUND SIGN. f237 OR DIAL STAR-R.
a836	f110 LIST BUTTONS f142 TO PLAY BACK THE HEADER, DIAL 3. f143 TO STEP BACK AGAIN, DIAL 2.
a837	f846 YOU ARE SELECTING AN OPTION FOR AUTOMATIC MESSAGE SCAN. f843 TO SCAN HEADERS AND MESSAGES, DIAL 1. TO SCAN HEADERS ONLY, DIAL 2. TO SCAN MESSAGES ONLY, DIAL 3.
a838	f258 MESSAGE TO NAME IF (NUMBER>0) THEN f2 AND NUMBER IF (NUMBER=1) THEN f602 OTHER ELSE f217 OTHERS ENDIF ENDIF

Announcement	Fragment and Text
a839	f258 MESSAGE TO NAME IF (NUMBER>0) THEN f2   AND NUMBER IF (NUMBER=1) THEN f602 OTHER ELSE f217 OTHERS ENDIF ENDIF
a840	f742 PRIVATE MESSAGE SENT TO NAME IF (NUMBER>0) THEN f2   AND NUMBER IF (NUMBER=1) AND f602 OTHER ELSE f217 OTHERS ENDIF ENDIF

Announcement	Fragment and Text
a841	f696 PRIVATE MESSAGE TO NAME IF (NUMBER>0) THEN f2    AND NUMBER IF (NUMBER=1) THEN f602 OTHER ELSE f217 OTHERS ENDIF ENDIF
a842	f647 THE MESSAGE WILL BE PRIVATE.
a843	f390 ZERO
a844	f391 ONE
a845	f392 TWO
a846	f393 THREE
a847	f394 FOUR
a848	f395 FIVE
a849	f396 SIX
a850	f397 SEVEN
a851	f398 EIGHT
a852	f399 NINE
a853	f308 YOU ARE PLAYING ANNOUNCEMENT FRAGMENTS. f279 ENTER ANNOUNCEMENT SET AND POUND SIGN.
a854	f307 YOU ARE PLAYING ANNOUNCEMENTS. f279 ENTER ANNOUNCEMENT SET AND POUND SIGN.
a855	f900 STANDARD U.S. TDD
a856	f901 ANNOUNCEMENT' SET DOES NOT EXIST
a857	f902 ANNOUNCEMENT SET
a858	f909 ANNOUNCEMENT BUTTONS f906

Announcement	Fragment and Text
a859	f910 YOU ARE ATTEMPTING TO PLAY AN ANNOUNCEMENT THAT NEEDS ADDITIONAL INPUT BEFORE IT CAN BE PLAYED. f832 PLEASE ENTER EXTENSION AND POUND SIGN. f58 FOR NAME ADDRESSING, DIAL STAR-A.
a860	f910 YOU ARE ATTEMPTING TO PLAY AN ANNOUNCEMENT THAT NEEDS ADDITIONAL INPUT BEFORE IT CAN BE PLAYED. f710 ENTER NEXT NAME AND POUND SIGN. f148 FOR EXTENSION ADDRESSING, DIAL STAR-A.
a861	f910 YOU ARE ATTEMPTING TO PLAY AN ANNOUNCEMENT THAT NEEDS ADDITIONAL INPUT BEFORE IT CAN BE PLAYED. f329 YOU HAVE NOT YET ENTERED ENOUGH CHARACTERS TO IDENTIFY A SPECIFIC SUBSCRIBER. TO ENTER THE LETTER Q, DIAL 7. FOR Z, DIAL 9. f484 ENTER MORE CHARACTERS FOLLOWED BY THE POUND SIGN. IF YOU JUST COMPLETED ENTERING THE LAST NAME, ENTER THE FIRST NAME. f225 AND POUND SIGN.
a862	f383 PLEASE ENTER HOUR, THEN TWO DIGITS FOR MINUTE S, THEN "A" FOR AM OR "P" FOR PM, AND POUND SIGN.
a863	f910 YOU ARE ATTEMPTING TO PLAY AN ANNOUNCEMENT THAT NEEDS ADDITIONAL INPUT BEFORE IT CAN BE PLAYED. f383 PLEASE ENTER HOOR, THEN TWO DIGITS FOR MINUTES, THEN "A" FOR AM OR "P" FOR PM, AND POUND SIGN.
a864	f914 NOT FILED.
a865	f915 NO OPTIONS MENU AVAILABLE.
a866	f621 PRIVATE.
a867	f969 YOU ARE CHOOSING BETWEEN ANNOUNCEMENT SETS WHOSE NAMES MATCH YOUR ENTRY. TO INDICATE NO ANNOUNCEMENT SETS MATCH, DELETE ENTRY BY DIALING STAR-D.
a868	f921 TO MAKE PRIVATE, DIAL 1. TO SEND, DIAL POUND.
a869	f922 TO ACCESS THE DELIVERY OPTIONS MENU, DIAL POUND AFTER RECORDING YOUR MESSAGE.
a870	f923 DIAL POUND TO APPROVE YOUR MESSAGE AND ACCESS THE DELIVERY OPTIONS MENU.
a871	f926 XXXXERRORXXXX

Announcement	Fragment and Text
a872	f937 SORRY YOU ARE HAVING DIFFICULTY. PLEASE GET HELP AND TRY AGAIN LATER. f547 GOOD-BYE.
a873	IF (NUMBER<100) T H E N IF (NUMBER%10==0) T H E N IF (NUMBER=0) THEN f585 ZERO f924 SECONDS ELSE a820(NUMBER) f924 SECONDS ENDIF ELSE a972(NUMBER) ENDIF ELSE a820((NUMBER+30)/60) f925 MINUTES ENDIF
a874	f4 NOT PRIVATE.
a875	f601 PRIORITY
a876	f622 NOT PRIORITY.
a877	f158 TRANSFER CANNOT BE COMPLETED. f236 TRY AGAIN f109 LATER.
a878	f263 YOU ARE RECORDING A SUBSCRIBER NAME. f980 TO RECORD FROM= DIAL 1. f979 AFTER RECORDING, DIAL 1 AGAIN.
a879	f346 YOU ARE RECORDING A MACHINE NAME. f13 TO RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN.

Announcement	Fragment and Text
a880	f263 YOU ARE RECORDING A SUBSCRIBER NAME. f980 TO RECORD FROM HERE DIAL 1. f979 AFTER RECORDING, DIAL 1 AGAIN. f304 TO PLAY BACK MESSAGE, DIAL 2-3. TO DELETE YOUR MESSAGE, DIAL STAR-D. TO APPROVE YOUR MESSAGE, DIAL POUND. f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.) f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.
a881	f346 YOU ARE RECORDING A MACHINE NAME. f13 TO RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN. f304 TO PLAY BACK MESSAGE, DIAL 2-3. TO DELETE YOUR MESSAGE, DIAL STAR-D. TO APPROVE YOUR MESSAGE, DIAL POUND. f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.) f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.
a882	f73 YOU HAVE NUMBER f854 SECONDS TO FINISH RECORDING.
a883	f232 RECORDING STOPPED. f570 RECORDED NAME TOO LONG f608 WAIT FOR THE "GA" PROMPT, THEN TYPE YOUR NAME. WHEN YOU HAVE FINISHED TYPING YOUR NAME, DIAL 1.

Announcement	Fragment and Text
a884	f861 AMIS f281 MESSAGE FROM NAME f262 RECEIVED TIME DATE a873(NUMBER)
a885	f861 AMIS f160 MESSAGE f262 RECEIVED TIME DATE a873(NUMBER)
a886	f978 UNKNOWN f861 AMIS f510 NUMBER
a888	BUTTONS f86 EXTENSION BUTTONS(2)
a889	f25 LIST ID NOT FOLLOWED BY POUND. f498 PLEASE ENTER A NEW LIST ID f224 AND POUND SIGN.
a890	f37 EXTENSION ENTERED NOT FOLLOWED BY POUND f469 ENTER OWNERS EXTENSION f224 AND POUND SIGN. f471 IF IT'S YOUR LIST, DIAL POUND.
a891	f38 NAME ENTERED NOT FOLLOWED BY POUND f470 ENTER OWNER'S LAST NAME f224 AND POUND SIGN. f471 IF IT'S YOUR LIST, DIAL POUND.
a892	f856 THIS IS A RECORDED MESSAGE FROM NAME f21 TO PLAY BACK, DIAL ZERO. f389 TO DELETE, DIAL STAR-D.

Announcement	Fragment and Text
a893	f856 THIS IS A RECORDED MESSAGE FROM NAME f21 TO PLAY BACK, DIAL ZERO. f389 TO DELETE, DIAL STAR-D. f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a894	f562 ENTER THE f855 REMOTE AMIS MAILBOX ID f224 AND POUND SIGN.
a895	f867 YOU ARE ENTERING THE f855 REMOTE AMIS MAILBOX ID f868 MAILBOX ID MUST BE LESS THAN OR EQUAL TO 16 DIGITS. f833 TO DELETE CURRENT ENTRY, DIAL STAR-D.
a896	f260 SCHEDULED FOR TIME DATE f862 IT COULD NOT BE DELIVERED BECAUSE THE RECIPIENT APPEARS TO BE A WRONG NUMBER.
a897	f260 SCHEDULED FOR TIME DATE f863 IT COULD NOT BE DELIVERED AFTER MULTIPLE ATTEMPTS TO DELIVER THE MESSAGE.
a898	f864 AUTOMATED CALL, PLEASE DIAL 1 TO DISCONNECT.
a899	f865 YOUR NUMBER WAS DIALED BY MISTAKE. WE ARE SORRY FOR . THIS INCONVENIENCE. TO PREVENT THIS FROMRECURRING, THIS CALL HAS BEEN REPORTED AS A MISDIALED CALL.

Announcement	Fragment and Text
a901	<pre> IF (NUMBER&gt;1000) THEN a906(NUMBER) ELSE a820(NUMBER/100) f454 HUNDRED IF (NUMBER%100&gt;0) THEN a820(NUMBER%100) ENDIF ENDIF                     </pre>
a902	<pre> IF (NUMBER=0) THEN a820(12) ELSE IF (NUMBER&gt;12) T H E N a820(NUMBER-12) ELSE a820(NUMBER) ENDIF ENDIF                     </pre>
a903	<pre> IF (NUMBER&gt;0) THEN IF (NUMBER&lt;10) THEN f390 ZERO ENDIF a820(NUMBER) ENDIF                     </pre>

Announcement	Fragment and Text
a904	<pre> IF (NUMBER&gt;12) T H E N f301 P.M. ELSE IF (NUMBER=12) THEN IF (NUMBER(2)==0) THEN f201 NOON. ELSE f301 P.M. ENDIF ELSE IF (NUMBER==0&amp;&amp;NUMBER(2)==0) T H E N f161 MIDNIGHT. ELSE f300 A.M. ENDIF ENDIF ENDIF </pre>
a905	(f938+(NUMBER-1))
a906	<pre> IF (NUMBER(1)&gt;1000000) T H E N f456 MILLION ELSE a820(NUMBER/1000) f455 THOUSAND IF ((NUMBER%1000)&gt;0) THEN a820(NUMBER%1000) ENDIF ENDIF </pre>

Announcement	Fragment and Text
a907	f858 TO REPLAY, DIAL ZERO. f389 TO DELETE, DIAL STAR-D.
a908	f76 DELETED. f95 PLEASE DISCONNECT.
a909	f859 MAILBOX ID NOT FOLLOWED BY POUND.
a910	f860 MAILBOX ID NOT VALID.
a911	f866 AMIS CASUAL SUBSCRIBERS CANNOT BE ADDED TO YOUR LIST.
a912	f561 YOU ARE ADDRESSING YOUR MESSAGE. f285 TO ADD A MEMBER, ENTER EXTENSION f224 AND POUND SIGN. f869 IF THE EXTENSION ENTERED BELONGS TO A CASUAL AMIS SUBSCRIBER, YOU WILL BE PROMPTED FOR A MAILBOX ID. f868 MAILBOX ID MUST BE LESS THAN OR EQUAL TO 16 DIGITS. f328 TO DELETE THE PREVIOUS ENTRY, DIAL STAR-D. TO ADD A MAILING LIST YOU HAVE ALREADY CREATED, OR A PUBLIC LIST OWNED BY OTHERS, DIAL STAR-L. TO REVIEW OR MODIFY THE LIST YOU ARE CREATING, DIAL STAR-1. TO APPROVE THE LIST YOU ARE CREATING AND MOVE ONTO THE NEXT STEP, DIAL POUND. f58 FOR NAME ADDRESSING, DIAL STAR-A.
a913	NAME f75 TO SKIP, DIAL POUND. TO DELETE, DIAL STAR-D. f333 TO ADD ENTRIES TO THE LIST OR TO CHANGE STATUS OF LIST, DIAL 1.
a914	f9 STAR-R NOT AVAILABLE.
a915	f861 AMIS BUTTONS f86 EXTENSION BUTTONS(2)
a916	TIME
a917	f711 ALIAS BUTTONS f712 DEFINED FOR NAMEEXT

Announcement	Fragment and Text
a918	DATE
a919	f617 TO REMOVE PRIVATE STATUS, DIAL 1. f971 TO SEND, DIAL POUND.
a920	f56 THANK YOU FOR LEAVING YOUR MESSAGE. f46 TO ACCESS YOUR MAILBOX, DIAL STAR-R. f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f973 IF YOU ARE FINISHED, PLEASE HANG UP.
a921	f56 THANK YOU FOR LEAVING YOUR MESSAGE. f46 TO ACCESS YOUR MAILBOX, DIAL STAR-R. f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f972 TO REACH THE COVERING EXTENSION, DIAL ZERO. f973 IF YOU ARE FINISHED, PLEASE HANG UP.
a922	f974 NOT BROADCAST.
a923	f975 NOT LOGIN ANNOUNCEMENT.
a924	f491 YOU ARE GETTING YOUR INCOMING MESSAGES. TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RESPOND TO THE MESSAGE, DIAL 1. f388 TO SKIP, DIAL POUND. f142 TO PLAY BACK THE HEADER, DIAL 3. f143 TO STEP BACK AGAIN, DIAL 2. f578 TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND. f577 TO HOLD THE MESSAGE IN ITS CURRENT CATEGORY, DIAL STAR-STAR-H. f377 TO DELETE MESSAGE, DIAL STAR-D. f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)

Announcement	Fragment and Text
a925	<p>f848 YOU ARE AUTOMATICALLY SCANNING YOUR INCOMING MESSAGES. TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RESPOND TO THE MESSAGE, DIAL 1.</p> <p>f851 TO SKIP, DIAL POUND.</p> <p>f142 TO PLAY BACK THE HEADER, DIAL 3.</p> <p>f143 TO STEP BACK AGAIN, DIAL 2.</p> <p>f578 TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.</p> <p>f577 TO HOLD THE MESSAGE IN ITS CURRENT CATEGORY, DIAL STAR-STAR-H.</p> <p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE “HEARING” AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE “HEARING” YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f377 TO DELETE MESSAGE, DIAL STAR-D.</p>
a926	<p>f375 YOU ARE GETTING YOUR INCOMING MESSAGES. TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RESPOND TO THE MESSAGE, DIAL 1.</p> <p>f388 TO SKIP, DIAL POUND.</p> <p>f142 TO PLAY BACK THE HEADER, DIAL 3.</p> <p>f143 TO STEP BACK AGAIN, DIAL 2.</p> <p>f578 TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.</p> <p>f577 TO HOLD THE MESSAGE IN ITS CURRENT. CATEGORY, DIAL STAR-STAR-H.</p> <p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE “HEARING” AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE “HEARING” YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f377 TO DELETE MESSAGE ,DIAL STAR-D.</p>

Announcement	Fragment and Text
a927	<p>f847 YOU ARE AUTOMATICALLY SCANNING YOUR INCOMING MESSAGES. TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RESPOND TO OR FORWARD THE MESSAGE , DIAL 1.</p> <p>f851 TO SKIP, DIAL POUND.</p> <p>f142 TO PLAY BACK THE HEADER, DIAL 3.</p> <p>f143 TO STEP BACK AGAIN, DIAL 2.</p> <p>f578 TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.</p> <p>f577 TO HOLD THE MESSAGE IN ITS CURRENT CATEGORY, DIAL STAR-STAR-H.</p> <p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE “HEARING” AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE “HEARING” YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f377 TO DELETE MESSAGE, DIAL STAR-D.</p>
a928	<p>f378 YOU ARE CHECKING THE STATUS OF YOUR OUTGOING MESSAGES.</p> <p>f381 TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RE-RECORD MESSAGE BEFORE DELIVERY, DIAL 1.</p> <p>f388 TO SKIP, DIAL POUND.</p> <p>f142 TO PLAY BACK THE HEADER, DIAL 3.</p> <p>f143 TO STEP BACK AGAIN, DIAL 2.</p> <p>f578 TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.</p> <p>f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE “HEARING” AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE“HEARING” YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f377 TO DELETE MESSAGE, DIAL STAR-D.</p>

Announcement	Fragment and Text
a929	<p>f378 YOU ARE CHECKING THE STATUS OF YOUR OUTGOING MESSAGES.                      f474 TO PLAY BACK, DIAL ZERO. TO CHANGE OR SEND AGAIN, DIAL 1.                      f388 TO SKIP, DIAL POUND.                      f142 TO PLAY BACK THE HEADER, DIAL 3.                      f143 TO STEP BACK AGAIN, DIAL 2.                      f578 TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.                      f339 (OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)                      f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.                      f377 TO DELETE MESSAGE DIAL STAR-D.</p>
a930	<p>f378 YOU ARE CHECKING THE STATUS OF YOUR OUTGOING MESSAGES.                      f388 TO SKIP, DIAL POUND.                      f142 TO PLAY BACK THE HEADER, DIAL 3.                      f143 TO STEP BACK AGAIN, DIAL 2.                      f578 TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.                      f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.                      f379 TO DELETE STATUS INFORMATION, DIAL STAR-D.</p>
a931	<p>f674 DUE TO SENDING RESTRICTIONS, YOU CANNOT SEND MESSAGES TO                      f861 AMIS                      BUTTONS</p>

Announcement	Fragment and Text
a932	f493 YOU ARE REQUESTING A TRANSFER. f562 ENTER THE NUMBER <b>f563</b> DIGIT EXTENSION f119 YOU WISH TO CALL f224 AND POUND SIGN. f115 TO TRANSFER USING NAMES INSTEAD, DIAL STAR-A. f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a933	f493 YOU ARE REQUESTING A TRANSFER. f562 ENTER THE NUMBER f563 DIGIT EXTENSION f119 YOU WISH TO CALL f224 AND POUND SIGN. f115 TO TRANSFER USING NAMES INSTEAD, DIAL STAR-A. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a934	f288 YOU ARE IN THE NAMES DIRECTORY. TO FIND A SUBSCRIBER'S EXTENSION, ENTER THE LAST NAME FOLLOWED BY THE POUND SIGN. TO ENTER THE LETTER Q, DIAL 7. FOR Z, DIAL 9. TO LOOK UP BY EXTENSION INSTEAD DIAL STAR-A. f277 TO EXIT DIRECTORY, DIAL POUND. f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.

Announcement	Fragment and Text
a935	<p>f322 YOU ARE IN THE NUMBERS DIRECTORY. TO FIND A SUBSCRIBER'S NAME ENTER THE EXTENSION FOLLOWED BY THE POUND SIGN. TO LOOKUP BY NAME INSTEAD, DIAL STAR-A.</p> <p>f277 TO EXIT DIRECTORY, DIAL POUND.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a936	<p>f493 YOU ARE REQUESTING A TRANSFER.</p> <p>f987 ENTER LAST NAME OF THE PERSON</p> <p>f119 YOU WISH TO CALL</p> <p>f224 AND POUND SIGN.</p> <p>f290 IF YOU WISH TO SPECIFY A NON-AUDIX SUBSCRIBER, FIRST CHANGE TO EXTENSION ADDRESSING BY DIAL STAR-A.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a937	<p>f493 YOU ARE REQUESTING A TRANSFER.</p> <p>f987 ENTER LAST NAME OF THE PERSON</p> <p>f119 YOU WISH TO CALL</p> <p>f224 AND POUND SIGN.</p> <p>f290 IF YOU WISH TO SPECIFY A NON-AUDIX SUBSCRIBER, FIRST CHANGE TO EXTENSION ADDRESSING BY DIAL STAR-A.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a938	<p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a939	<p>f357 YOU ARE CHOOSING BETWEEN SUBSCRIBERS WHOSE NAMES MATCH YOUR ENTRY. TO INDICATE NO SUBSCRIBERS MATCH, DELETE ENTRY BY DIALING STAR-D. TO CHANGE TO EXTENSION ADDRESSING AND DELETE YOUR ENTRY, DIAL STAR-A.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a940	f482 DIAL POUND TO SELECT NAME f483 OR ENTER MORE CHARACTERS f225 AND POUND SIGN. f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a941	f482 DIAL POUND TO SELECT NAMEEXT f483 OR ENTER MORE CHARACTERS f225 AND POUND SIGN. f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
a942	f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO. f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.

Announcement	Fragment and Text
a943	<p>f518 YOU ARE CREATING A TDD MESSAGE THAT WILL BE DELIVERED TO THE PERSON SPECIFIED IN YOUR MESSAGE AS SOON AS POSSIBLE. PLEASE BE AWARE THAT, IN ORDER TO FORWARD THIS MESSAGE TO THE RECIPIENT, SOMEONE WILL HAVE TO PLAY BACK THE NAME AND NUMBER PORTION.</p> <p>f13 TO RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN.</p> <p>f304 TO PLAY BACK MESSAGE, DIAL 2-3. TO DELETE YOUR MESSAGE, DIAL STAR-D. TO APPROVE YOUR MESSAGE, DIAL POUND.</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a944	<p>f517 YOU ARE ENTERING THE NUMBER OF THE PERSON FOR WHOM YOU ARE LEAVING A MESSAGE. THIS MAYBE THE COMPLETE NUMBER YOU DIALED OR SIMPLY THE EXTENSION. FOR A FASTER RESPONSE, TERMINATE YOUR ENTRY WITH A POUND SIGN.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p> <p>f516 TO LEAVE A MESSAGE THAT WILL BE DELIVERED AS SOON AS POSSIBLE,</p> <p>f380 PLEASE WAIT.</p>
a945	<p>f517 YOU ARE ENTERING THE NUMBER OF THE PERSON FOR WHOM YOU ARE LEAVING A MESSAGE. THIS MAYBE THE COMPLETE NUMBER YOU DIALED OR SIMPLY THE EXTENSION. FOR A FASTER RESPONSE, TERMINATE YOUR ENTRY WITH A POUND SIGN.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p> <p>f274 PLEASE MAKE ENTRY SOON, OR BE DISCONNECTED.</p>

Announcement	Fragment and Text
a946	<p>f517 YOU ARE ENTERING THE NUMBER OF THE PERSON FOR WHOM YOU ARE LEAVING A MESSAGE. THIS MAYBE THE COMPLETE NUMBER YOU DIALED OR SIMPLY THE EXTENSION. FOR A FASTER RESPONSE, TERMINATE YOUR ENTRY WITH A POUND SIGN.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p> <p>f515 TO BE TRANSFERRED TO AN OPERATOR,</p> <p>f380 PLEASE WAIT.</p>
a947	<p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a948	<p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a949	<p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a950	<p>f95 PLEASE DISCONNECT.</p>
a951	<p>f517 YOU ARE ENTERING THE NUMBER OF THE PERSON FOR WHOM YOU ARE LEAVING A MESSAGE. THIS MAYBE THE COMPLETE NUMBER YOU DIALED OR SIMPLY THE EXTENSION. FOR A FASTER RESPONSE, TERMINATE YOUR ENTRY WITH A POUND SIGN.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p> <p>f515 TO BE TRANSFERRED TO AN OPERATOR,</p> <p>f380 PLEASE WAIT.</p>

Announcement	Fragment and Text
a952	<p>f517 YOU ARE ENTERING THE NUMBER OF THE PERSON FOR WHOM YOU ARE LEAVING A MESSAGE. THIS MAYBE THE COMPLETE NUMBER YOU DIALED OR SIMPLY THE EXTENSION. FOR A FASTER RESPONSE, TERMINATE YOUR ENTRY WITH A POUND SIGN.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p> <p>f516 TO LEAVE A MESSAGE THAT WILL BE DELIVERED AS SOON AS POSSIBLE,</p> <p>f380 PLEASE WAIT.</p>
a953	<p>f517 YOU ARE ENTERING THE NUMBER OF THE PERSON FOR WHOM YOU ARE LEAVING A MESSAGE. THIS MAYBE THE COMPLETE NUMBER YOU DIALED OR SIMPLY THE EXTENSION. FOR A FASTER RESPONSE, TERMINATE YOUR ENTRY WITH A POUND SIGN.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p> <p>f274 PLEASE MAKE ENTRY SOON, OR BE DISCONNECTED.</p>
a954	<p>f56 THANK YOU FOR LEAVING YOUR MESSAGE.</p> <p>f95 PLEASE DISCONNECT.</p>
a955	<p>f56 THANK YOU FOR LEAVING YOUR MESSAGE.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f973 IF YOU ARE FINISHED, PLEASE HANG UP.</p>
a956	<p>f56 THANK YOU FOR LEAVING YOUR MESSAGE.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f972 TO REACH THE COVERING EXTENSION, DIAL ZERO.</p> <p>f973 IF YOU ARE FINISHED, PLEASE HANG UP.</p>
a957	<p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p>
a958	<p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p>
a959	<p>f95 PLEASE DISCONNECT.</p>
a960	<p>f282 TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>

Announcement	Fragment and Text
a961	<p>f518 YOU ARE CREATING A TDD MESSAGE THAT WILL BE DELIVERED TO THE PERSON SPECIFIED IN YOUR MESSAGE AS SOON AS POSSIBLE. PLEASE BE AWARE THAT, IN ORDER TO FORWARD THIS MESSAGE TO THE RECIPIENT, SOMEONE WILL HAVE TO PLAY BACK THE NAME AND NUMBER PORTION.</p> <p>f13 TO RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN.</p> <p>f304 TO PLAY BACK MESSAGE, DIAL 2-3. TO DELETE YOUR MESSAGE, DIAL STAR-D. TO APPROVE YOUR MESSAGE, DIAL POUND.</p> <p>f292 TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS .) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.</p> <p>f117 TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.</p> <p>f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.</p> <p>f80 TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.</p>
a962	f853 MESSAGES SKIPPED, RETAINED AS NEW.
a963	f477 DIAL 1 TO SELECT
a964	f478 DIAL 2 TO SELECT
a965	f479 DIAL 3 TO SELECT
a966	f480 DIAL 4 TO SELECT
a967	f481 DIALS TO SELECT
a968	f96 FOR HELP, DIAL STAR-H.
a969	<pre> IF (NUMBER/100&gt;12) T H E N f99 INVALID ANNOUNCEMENT. ELSE IF (NUMBER&lt;1000) THEN f99 INVALID ANNOUNCEMENT. ELSE a973(NUMBER) ENDIF ENDIF a971(NUMBER) </pre>

Announcement	Fragment and Text
a970	f(NUMBER/100) f(NUMBER%100)
a971	f((NUMBER/10)%100)
a972	<pre> IF (NUMBER&lt;10) THEN TEN SECONDS ELSE IF (NUMBER%10&gt;=5) THEN a820(NUMBER+10)-(NUMBER%10)) SECONDS ELSE a820(NUMBER)-(NUMBER%10)) SECONDS ENDIF ENDIF                     </pre>
a973	<pre> IF (NUMBER%10==2) THEN f((NUMBER/1000)%12) ELSE IF (NUMBER%10=7) THEN IF (NUMBER/1000!=12) THEN f12 TO RE-RECORD, DIAL 1. AFTER RECORDING DIAL 1 AGAIN. TO DELETE, DIAL STAR-D. TO PLAY BACK, DIAL 2-3. TO APPROVE AS IS, DIAL POUND. +(NUMBER/1000) ELSE f(NUMBER/1000) ENDIF ELSE f99 INVALID ANNOUNCEMENT. ENDIF ENDIF                     </pre>

Announcement	Fragment and Text
a974	f260 SCHEDULED FOR TIME DATE f981 MESSAGE NOT DELIVERED BECAUSE IT WAS LONGER THAN THE EIGHT-MINUTE AMIS MESSAGE LIMIT.
al 105	f43 YOUR CALL IS BEING ANSWERED BY TDD-AUDIX.
al112	IF (NUMBER>0) THEN f1305 PLEASE ENTER AN OUTCALLING OPTION. TO SEE A LIST OF OPTIONS, DIAL ZERO. ENDIF IF (NUMBER(2)>0) THEN f0 NULL ENDIF f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.
al121	f1404 TO ADMINISTER THIS GREETING, DIAL 1.
al122	f1408 TO ADMINISTER THIS GREETING, DIAL 2. f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.
al123	IF (NUMBER>0) THEN f1405 TO PLAY BACK YOUR SECONDARY GREETING, DIAL ZERO. f1409 TO RECORD YOUR SECONDARY GREETING, DIAL 1. f1402 TO ADMINISTER YOUR PRIMARY GREETING, DIAL POUND. ELSE f1406 TO PLAY BACK YOUR PRIMARY GREETING, DIAL ZERO. f1407 TO RECORD YOUR PRIMARY GREETING, DIAL 1. f1410 TO ADMINISTER YOUR SECONDARY GREETING, DIAL POUND. ENDIF f105 TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.

Announcement	Fragment and Text
al124	<pre> IF (NUMBER&gt;0) T H E N f1405 TO PLAY BACK YOUR SECONDARY GREETING, DIAL ZERO. ELSE f1406 TO PLAY BACK YOUR PRIMARY GREETING, DIAL ZERO. ENDIF f757 TO RE-RECORD, DIAL 1. IF (NUMBER&gt;0) T H E N f1412 TO DELETE YOUR SECONDARY GREETING, AND USE THE SYSTEM GREETING, DIAL STAR-D. f1402 TO ADMINISTER YOUR PRIMARY GREETING, DIAL POUND. ELSE f1411 TO DELETE YOUR PRIMARY GREETING, AND USE THE SYSTEM GREETING DIAL STAR-D. f1410 TO ADMINISTER YOUR SECONDARY GREETIG, DIAL POUND. ENDIF f105 TO RESTART AT THE ACTIVITYMENU, DIAL STAR-R. </pre>
al125	<pre> IF (NUMBER&gt;0) T H E N f1414 YOUR NEW SECONDARY GREETING IS NOW ACTIVE. ELSE f1413 YOUR NEW PRIMARY GREETING IS NOW ACTIVE. ENDIF </pre>
al 126	<pre> f1415 RECORDING DELETED. IF (NUMBER&gt;0) T H E N f1417 YOUR SECONDARY GREETING HAS NOT CHANGED. ELSE f1416 YOUR PRIMARY GREETING HAS NOT CHANGED. ENDIF </pre>

Announcement	Fragment and Text
al127	f1400 FOR ENGLISH DIAL STAR-I.
al128	f1401 YOUR PRIMARY GREETING IS IN
al129	f0 NULL
al130	f1403 YOUR SECONDARY GREETING IS IN
al131	f0 NULL
al132	f1420 CALLERS WILL BE GREETED AND WILL RECEIVE INSTRUCTIONS IN THE PRIMARY LANGUAGE UNLESS THEY DIAL STAR-1, IN WHICH CASE THEY WILL BE GREETED AND RECEIVE INSTRUCTIONS IN THE SECONDARY LANGUAGE.
al133	IF (NUMBER>0) THEN f1419 YOU ARE ADMINISTERING YOUR SECONDARY GREETING. ELSE f1418 YOU ARE ADMINISTERING YOUR PRIMARY GREETING. ENDIF
al134	f1430 THE FOLLOWING MESSAGE WAS RESTORED:
al135	f1431 NO MESSAGE TO RESTORE.
al136	f1432 TO UNDELETE LAST DELETED MESSAGE, DIAL STAR-STAR-U.
al137	f913 IF FINISHED, DIAL POUND.
al138	f1433 THE RETURN ADDRESS FOR THIS MESSAGE IS NOT A VALID EXTENSION.
al139	f1434 TO RETURN TO GETTING MESSAGES, DIAL POUND. f8 TO RECORD A NEW MESSAGE, DIAL 4.
al140	f1434 TO RETURN TO GETTING MESSAGES, DIAL POUND. f291 TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T. f96 FOR HELP, DIAL STAR-H.
al141	f1434 TO RETURN TO GETTING MESSAGES, DIAL POUND. f18 TO FORWARD WITH COMMENT, DIAL 2. f8 TO RECORD A NEW MESSAGE, DIAL 4.
al142	f1435 GA
al143	f1436 ENGLISH



## B. Fragment/Announcement Cross-Reference

---

This appendix lists all of the voice fragments in the DEFINITY AUDIX announcement set for the Telecommunications Device for the DEAF (TDD), as well as the announcements that use the fragments and the text of the fragments.

Fragment Number	Announcements	Fragment Text
f0	a1112 a1129 a1131	NULL
f1	a649	SOMEONE IS CHANGING YOUR GREETING, PLEASE TRY AGAIN LATER
f2	a210 a235 a236 a273 a342 a343 a344 a345 a350 a352 a366 a372 a381 a387 a398 a404 a412 a418 a493 a540 a541 a542 a543 a544 a545 a546 a553 a554 a673 a675 a767 a794 a800 a838 a839 a840 a841	AND
f3	a608	NO NEW REMOTE SUBSCRIBERS CAN BE ADDRESSED.
f4	a874	NOT PRIVATE.
f5	a26 a283	TO RECORD PERSONAL GREETING, DIAL 1. TO SEE PERSONAL GREETING, DIAL ZERO. TO SELECT WHICH GREETING TO USE, DIAL STAR-POUND.
f6	a100 a509 a98	ENTER MACHINE IDENTIFICATION.
f7		CANNOT PLAY BACK AN UNDELIVERABLE MESSAGE.
f8	a1139 a1141 a123 a126 a128 a168 a169 a170 a202 a203 a204 a205 a62 a693 a759 a760 a761 a768 a85	TO RECORD A NEW MESSAGE, DIAL 4.
f9	a914	STAR-R NOT AVAILABLE.
f10	a442	THAT IS NOT A VALID MACHINE ID.
f11	a98	YOU ARE RECORDING MACHINE NAMES.

Fragment Number	Announcements	Fragment Text
f12	a310 a973	TORE-RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN. TO DELETE, DIAL STAR-D. TO PLAY BACK, DIAL 2-3. TO APPROVE AS IS, DIAL POUND.
	a10l a267 a332 a49 a581 a589 a68 a879 a881 a943 a961	TO RECORD, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN.
f14	a39 a502	TO MAKE PRIVATE, DIAL 1.70 MAKE PUBLIC, DIAL 2.
f15	a455 a456	AND IS
f16	a238	ENTER ANNOUNCEMENT ID
f17	a184 a190	INCLUDING
f18	a1141 a202 a693 a759 a768	TO FORWARD WITH COMMENT, DIAL 2.
f19	a695 a698	TO REVIEW FROM BEGINNING, DIAL STAR-1. IF FINISHED, DIAL STAR-POUND.
	a822	REMOTE EXTENSION
	a276 a527 a530 a747 a892 a893	TO PLAY BACK, DIAL ZERO.
	a318 a609 a715 a765	TO DELIVER NOW, DIAL POUND. OR, TO SCHEDULE DELIVERY TIME, USE THE TELEPHONE KEYS TO ENTER HOUR, MINUTES, A OR P, AND POUND SIGN.
f23	a113 a722	TO RECORD MESSAGES, DIAL 1.70 GET MESSAGES, DIAL 2. TO ADMINISTER YOUR GREETING, DIAL 3.
<b>f24</b>	a508 a747	TO DELETE, DIAL STAR-D.
<b>f25</b>	a889	LIST ID NOT FOLLOWED BY POUND.
f26	a757	TO RECORD NAMES, DIAL 4. TO PLAY NAMES, DIAL 5. TO RECORD MACHINE NAMES, DIAL 6. TO PLAY MACHINE NAMES, DIAL 7.
f27	a249	TO ATTACH ORIGINAL, DIAL "Y" FOR YES OR "N" FOR NO.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f29	a255	RETURNED TO CHECKING STATUS OF OUTGOING MESSAGES.
f30	a508	TO CHANGE, DIAL L
f31	a261	DATE NOT UNDERSTOOD.
f32	a262	YOU MUST ENTER YOUR EXTENSION TO LOGON.
f33	a315	TO DELETE, DIAL STAR-D.
f34	a538 a540 a547 a548	ELECTRONIC TEXT
f35	a264 a265	LOGIN INCORRECT.
f36	a50	TO RECORD A PERSONAL GREETING, DIAL 1.
f37	a654 a890	EXTENSION ENTERED NOT FOLLOWED BY POUND
f38	a655 a891	NAME ENTERED NOT FOLLOWED BY POUND
f39	a26	TO DELETE, DIAL STAR-D. TO STOP PLAYBACK, DIAL 3.
f40	a266	TIME NOT UNDERSTOOD.
f41	a123 a170 a203 a62 a85	TO FORWARD MESSAGE WITH COMMENT AT BEGINNING, DIAL 2.
f42	a284	THE RETURN ADDRESS FOR THIS MESSAGE IS NOT A MAILBOX ON THIS SYSTEM.
f43	a1105 a282 a288 a289 a290 a291 a292 a293	YOUR CALL IS BEING ANSWERED BY TDD-AUDIX.
f44	a289 a292	IS NOT AVAILABLE. TO LEAVE A TDD MESSAGE, PLEASE WAIT FOR THE "GA" PROMPT.
f45	a290 a291	IS BUSY. TO LEAVE A TDD MESSAGE, PLEASE WAIT FOR THE "GA" PROMPT.
f46	a27 a285 a4 a68 a69 a70 a71 a8 a920 a921	TO ACCESS YOUR MAILBOX, DIAL STAR-R
f47	a286 a287 a658 a659	CALL FROM

Fragment Number	Announcements	Fragment Text
f48	a113 a114 a115 a119 a120 a121 a125 a127 a129 a159 a76 a77	TO CHECK YOUR OUTGOING MESSAGES, DIAL 4. TO ADMINISTER MAILING LISTS, PERSONAL DIRECTORY, PASSWORD, OR ACCOUNT NAME, DIAL 5. TO CHANGE OUTCALLING INFORMATION, DIAL 6. TO SCAN INCOMING MESSAGES AUTOMATICALLY, DIAL 7. TO RE-LOGON, DIAL STAR-STAR-R
f49	a603	NO OPERATOR DEFINED.
f50	s295 s296 a660 a661	CALL
f51	a280	ENTRIES DELETED, PLEASE RE-ENTER DELIVERY TIME.
f53	a561	MESSAGE DELETED, NO DELIVERY WILL OCCUR.
f54		WAS ONLY PARTIALLY RECORDED DUE TO A SYSTEM PROBLEM.
f55		THE MESSAGE WAS DELIVERED AT
f56	a285 s920 a921 a954 a955 a956	THANK YOU FOR LEAVING YOUR MESSAGE.
f57	a680	ACCESSED
f58	a131 a19 a328 a6 a859 a912	FOR NAME ADDRESSING, DIAL STAR-A.
f59	a681	DELIVERED
f60	a308	CHANGED.
f61	a457 a458	TO MODIFY STATUS, DIAL "Y" FOR YES OR "N" FOR NO.
f62	a566 a567 a568 a569	PLEASE DELETE UNNEEDED MESSAGES
f63	a183 a184 a185 a190 a235 a236 a683	NEW
f64	a684	OLD
f65	a451 a452 a469	CONTAINS
f66	a535 a626	IF CORRECT, DIAL POUND. IF NOT, DIAL STAR-D AND RE-ENTER TIME.
f67	a559	TO CREATE ANOTHER LIST,

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f68	a685	UNDELIVERABLE
f69	a686	UNDELIVERED
f70	a687	UNOPENED
f71	a289 a290 a291 a292	TO LEAVE A TDD MESSAGE, PLEASE WAIT FOR THE "GA" PROMPT.
f72		DEFAULTED TO
f73	a882	YOU HAVE
f74	a187 a379 a380 a381 a382 a383 a384 a385 a386 a387 a388 a389 a390 a391 a392 a393 a453	DELETED.
f75	a179 a913	TO SKIP, DIAL POUND. TO DELETE, DIAL STAR-D.
f76	a281a312a576a908	DELETED.
f77	a316a317a318	DELETED.
f78		DELIVERED AT
f79	a323	DELETED.
f80	a102 a103 a104 a14 a147 a15 a152 a16 a17 a18 a61 a68a69a70a71 a763 a893 a934 a935 a939 a944 a945 a946 a947 a948 ,a949 a951 a952 a953 a961	TO HAVE SYSTEM WAIT, DIAL STAR-W. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
f81	a199 a443 a514	DIGITS.
f82	a504	PLEASE LEAVE A MESSAGE FOR
f83	a320 a451	ENTRIES.
f84	a320 a451	ENTRY.
f85	a332	ERASED.
f86	a287 a295 a334 a335 a336 a337 a338 a506 a659 a660 a709 a821 a888 a915	EXTENSION
f87	a812 a834	THIS CALL IS EXPERIENCING DIFFICULTIES.

Fragment Number	Announcements	Fragment Text
f88	a431	CANNOT USE THE GUEST PASSWORD
f89	a348	FIRST MESSAGE.
f90	a354	ENTER FRAGMENT ID
f91	a528	AT END.
f92	a573	NOTHING TO ADVANCE.
f93	a362	YOU HAVE NO PERSONAL GREETING, SYSTEM GREETING USED.
f94	a363	GOOD-BYE.
f95	a191 a253 a258 a336 a565 a615 a766 a834 a908 a950 a954 a959	PLEASE DISCONNECT.
f96	a1 140 a496 a694 a763 a968	FOR HELP, DIAL STAR-H.
f97	a815	FOR HELP AT ANY TIME, DIAL STAR-H.
f98	a639 a640 a741	MESSAGE NOT DELIVERED DUE TO TRANSMISSION PROBLEMS.
f99	a437 a969 a973	INVALID ANNOUNCEMENT.
f100	a263 a496	INVALID ENTRY.
f101	a441	INVALID FRAGMENT'.
f102 f103	a445	THAT IS NOT A VALID EXTENSION. INVALID VERSION, RE-ENTER NUMBER
f104	a447	MESSAGE DELIVERED, CANNOT PLAY BACK A DELIVERED MESSAGE.
f105	a105 a106 a108 a112 a1122 a1123 a1124 a116 a117 a13 a147 a152 a171 a172 a200 a246 a28 a559 a630 a631 a632 a633 a96 a97 a99	TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.
f106		LAST LIST.
f107		LAST MEMBER OF LIST.
f108	a34 a49	YOU ARE RECORDING A MESSAGE.
f109	a191 a712 a834 a877	LATER.

Fragment Number	Announcements	Fragment Text
f110	a449 a450 a451 a452 a453 a454 a455 a456 a457 a458 a459 a460 a461 a462 a463 a464 a465 a466 a467 a468 a469 a470 a471 a472 a473 a474 a475 a477 a662 a674 a836	LIST
f111	a29 a31 a478 a511 a559 a63 a64	PLEASE ENTER LIST ID
f112	a291 a292	OTHERWISE, FOR ASSISTANCE, DIAL ZERO NOW.
f113	a484	YOU ALREADY HAVE A LIST
f114	a484	TO REPLACE LIST, RE-ENTER ID AND POUND SIGN. TO CREATE A NEW LIST, ENTER NEW LIST ID
f115	al 16 al17 a193 a194 a195 al96 a932 a933	TO TRANSFER USING NAMES INSTEAD, DIAL STAR-A.
f116	a481 a482	LIST IS FULL.
f117	a108 al14 al16 a121 a127 a129 a15 a171 a193 a194 a4 a68 a69 a70 a71 a770 a771 a79 a80 a9 a932 a936 a942 a947 a951 a952 a953 a958 a961	TO REACH THE COVERING EXTENSION, DIAL STAR-ZERO.
f118	a349 a770 a771 a773 a774	ENTER LAST NAME
f119	al16 al17 a171 a172 a932 a933 a936 a937	YOU WISH TO CALL
f120	a460 a461 a462 a463 a470 a471 a472	TOO LARGE TO INCLUDE.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f121	a219 a223	WHEN FINISHED, APPROVE LIST BY DIALING POUND.
f122	a487	LIST SPACE NEARLY FULL. YOU MAY ENTER
f123	a487	NEW MEMBERS.
f124	a463 a472 a476 a480 a483	NO MORE LIST SPACE.
f125	a511	MUST BE SIX OR FEWER NUMERALS.
f126	a123 a170 a203 a62 a85	TO FORWARD MESSAGE WITH COMMENT AT END, DIAL 3.
f127	a694	RETURNED TO PREVIOUS ACTIVITY.
f128	a446 a769	TO REQUEST ANOTHER TRANSFER DIAL STAR-T.
f129	a446	OR LEAVE A MESSAGE FOR
f130	a459	BECAUSE THERE WERE NO ENTRIES.
f131	a220	TO SEND TO OTHERS NOT ON YOUR LIST,
f132	a460 a461 a470	YOU CAN STORE YOUR LIST AS IS BY DIALING STAR-POUND OR ADD UP TO
f133	a480 a481	TO CONTINUE REVIEWING, DIAL 3. TO DELETE AN ENTRY, DIAL STAR-D. IF FINISHED REVIEWING, DIAL STAR-POUND.
f134	a462 a471	YOU CAN STORE YOUR LIST OR DELETE MEMBERS, BUT YOU CANNOT ADD MEMBERS.
f135	a217 a218 a219 a221 a222 a223 a654 a655	AND POUND SIGN.
f136	a435	LINE BUSY.
f138	a100 a107	YOU ARE REVIEWING MACHINE NAMES.
f139	a460 a461 a470	ADDITIONAL MEMBERS,

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f140	a322	ENTRY ALREADY DELETED. TO DELETE MORE ENTRIES, DIAL STAR-1.
f141	a479	NO MORE LISTS.
f142	a348 a450 a454 a607 a680 a681 a682 a683 a684 a685 a686 a687 a706 a733 a836 a924 a925 a926 a927 a928 a929 a930	TO PLAY BACK THE HEADER, DIAL 3.
f143	a175 a607 a733 a836 a924 a925 a926 a927 a928 a929 a930	TO STEP BACK AGAIN, DIAL 2.
f144	a459 a464 a473	DELETED,
f145	a324	LIST HAS NO ENTRIES.
f146	a175 a176	TO CONTINUE, DIAL POUND.
f147	a696 a697 a698	REVIEW COMPLETED.
f148	a132 a20 a327 a67 a7 a860	FOR EXTENSION ADDRESSING, DIAL STAR-A.
f149	a436	ALL CIRCUITS BUSY.
f150	a452 a455 a456 a469	MEMBERS.
f151		TRY AGAIN.
f152	a505 a506	LEAVE WORD CALLING FROM
f153	a510	MAXIMUM LENGTH RECORDED. TO RE-RECORD, DIAL 2-1. TO APPROVE AS IS, DIAL POUND.
f154	a485	CANNOT CREATE NEW LIST, YOU HAVE MAXIMUM LISTS ALLOWED. TO SELECT LISTS TO BE DELETED, DIAL 5-1-2 AND FOLLOW INSTRUCTIONS.
f155	a486	CANNOT CREATE NEW LIST. TOTAL NUMBER OF MEMBERS IN ALL YOUR LISTS EQUALS MAXIMUM ALLOWED.
f156	a294 a513	MAXIMUM LENGTH RECORDED.
f157	a513	TO APPROVE AS IS, DIAL POUND.
f158	a191 a877	TRANSFER CANNOT BE COMPLETED.
f159	a452 a455 a456	MEMBER.

Fragment Number	Announcements	Fragment Text
f160	a183 a184 a185 a190 a235 a236 a885	MESSAGE
	a904	MIDNIGHT.
	a168 a169 a170 a759 a760 a761 a768 a85	TO CALL SENDER, DIAL ZERO.
f164	a680 a681 a682 a683 a684 a685 a686 a687	CATEGORY.
	a527 a530	RETURNED TO GETTING MESSAGES.
f166	a531	AT END. TO PLAY BACK, DIAL 2-3.
f167	a34 a533 a560	TO APPROVE, DIAL POUND. TO RECORD FROM HERE, DIAL 1. TO PLAY BACK, DIAL 2- 3.
f168	a183 a184 a185 a190 a235 a236 a538 a539 a540 a541 a542 a543 a544 a545 a546 a547 a548 a549 a550 a551 a552 a553 a554 a555 a627	MESSAGES.
f169	a577	ADMIN VERSION NOT SPECIFIED. PLEASE DO SO USING ADMINISTRATORS TERMINAL.
	a534 a535	DELIVERY SCHEDULED
		MESSAGE SUMMARY.
	a539 a542 a544 a546 a548 a550 a552 a554 a627	YOU HAVE NEW
	a199 a317 a431 a443 a444 a514 a586 a612	PLEASE ENTER NEW PASSWORD
	a349 a770 a771	PLEASE NOTE ONLY AUDIX SUBSCRIBERS CAN BE SPECIFIED BY NAME.
f176		ENTER FRAGMENT ID
f177	a574	CANNOT PLAY BACK A DELIVERED MESSAGE.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f178	a575 a576	NO ADDRESSEES IDENTIFIED.
f179	a816	WARNING, IF YOU DO NOT SUPPLY AN ADDRESSEE LIST, MESSAGE WILL BE DELETED IMMEDIATELY.
f180	a578	NOTHING TO APPROVE.
f181	a562 a580 a581 a611	NOTHING TO APPROVE.
f182	a585 a586	NOTHING TO DELETE.
f183	a588	NOTHING TO DELETE.
f184	a589	NOTHING TO ERASE.
f185	a229 a467 a468 a475	NOT FOUND.
f186	a584	TO RECORD MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO CHECK YOUR OUTGOING MESSAGES, DIAL 4.
f187	a654 a655	AND NOT ADDED TO THE LIST.
f188	a592	PASSWORDS DO NOT MATCH. PLEASE RE-ENTER NEW PASSWORD
f189	a593	YOU HAVE NO MAILBOX.
f190	a594	MESSAGE DELIVERED, YOU CANNOT CHANGE IT NOW.
f191	a595	NO MORE MESSAGES.
f192	a597	NO MESSAGES.
f193	a598 a599 a692	NO NAME RECORDED.
f194	a600	NO NEW MESSAGES.
f195	a602	NO MESSAGES.
f196	a604	YOU HAVE NO PERSONAL GREETING.
f197	a178 a226 a348 a454	CANNOT STEP BACK.
f198	a537	PARTIAL NAME DELETED.
f199	a605 a606 a607	NOTHING TO REWIND.
f200	a609	NO TIME ENTERED, NOTHING TO DELETE.
f201	a904	N O O N .

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f202	a338 a466 a614 a615 a754	NOT VALID.
f203	a566 a567 a568	NO ROOM IN YOUR MAILBOX FOR A RECORDING.
f207	a571	MESSAGE TOO LONG TO ADD COMMENT. TO RECORD A NEW MESSAGE DIAL STAR-R-1.
f208	a465 a474 a477	IS NOT A PUBLIC LIST.
f209	a572	CANNOT MODIFY ANOTHER SUBSCRIBER'S LIST.
f210	a14 a51	PLEASE ENTER A NEW PASSWORD
f211	a444	TO FIFTEEN DIGITS
f212	a10 a16	PLEASE ENTER PASSWORD AGAIN FOR CONFIRMATION. TO DELETE THE PASSWORD YOU JUST ENTERED, DIAL STAR-D.
f213	a201	RE-ENTER PASSWORD
f214	a648	APPROVED.
f215	a569	NO ROOM TO RETAIN A COPY.
f216	a637 a638 a639 a640 a641 a642 a643 a644	ORIGINALLY
f217	a210 a273 a342 a343 a344 a345 a493 a673 a675 a767 a838 a839 a840 a841	OTHERS
f218	a181	DELETED.
f219	a469 a470 a471 a472 a473 a474 a477	OWNED BY
f220	a56 a646	ENTER PASSWORD
f221	a57	ENTER ANNOUNCEMENT ID AND POUND SIGN. REFER TO ADMIN MANUAL FOR CORRECT ID.
f222	a58	ENTER FRAGMENT ID AND POUND SIGN. REFER TO ADMIN MANUAL FOR CORRECT ID.
f223	a59	PLEASE ENTER EXTENSION

Fragment Number	Announcements	Fragment Text
f224	a100 a11 a116 a117 a12 a132 a14 a171 a172 a19 a193 a194 a195 a196 a199 a20 a201 a213 a214 a216 a234 a238 a29 a31 a317 a32 a349 a354 a359 a38 a431 a443 a444 a466 a478 a484 a497 a498 a499 a500 a509 a51 a511 a514 a53 a54 a55 a559 a56 a586 a59 a592 a6 a60 a612 a613 a621 a627 a63 a64 a646 a65 a66 a7 a770 a771 a773 a774 a782 a819 a835 a87 a889 a890 a891 a894 a912 a932 a933 a936 a937 a98	AND POUND SIGN.
f225	a45 a521 a67 a724 a725 a726 a861 a940 a941	AND POUND SIGN.
f226	a455 a658 a659 a660 a661 a662	PRIVATE
f227	a456 a674	PUBLIC
f228	a688	PLEASE WAIT FOR THE "GA" PROMPT.
f229	a689	YOU WILL HAVE UP TO
f230	a689	SECONDS TO RECORD.
f231		CANNOT BE FOUND.
f232	a611 a691 a692 a883	RECORDING STOPPED.
f233	a11 a12	PREVIOUS LOGIN INCORRECT. PLEASE RE- ENTER EXTENSION
f234	a192	TO RESPOND OR FORWARD, DIAL 1.

Fragment Number	Announcements	Fragment Text
f235	a10 a100 a107 a108 a123 a126 a128 a168 a169 a170 a19 a20 a24 a25 a26 a28 a30 a32 a38 a39 a40 a41 a42 a43 a44 a45 a48 a5 a50 a51 a57 a58 a59 a61 a62 a63 a64 a65 a66 a67 a724 a726 a78 a79 a80 a82 a83 a85 a9 a93 a94 a95 a98	TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R. TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.
f236	a191 a265 a712 a834 a877	TRY AGAIN
f237	a613 a835	OR DIAL STAR-R.
f238	a200	TO REVIEW ANOTHER LIST,
f239	a282	FOLLOWED BY THE POUND SIGN.
f240	a501	TO SKIP, DIAL POUND. TO PLAY BACK, DIAL ZERO.
f241	a463 a472 a482 a483	TO REVIEW LIST, DIAL STAR-1.
f242	a680 a681 a682 a683 a684 a685 a686 a687	RETURNED TO THE
f243	a364 a526 a733	REWOUND.
f244	a706	REWOUND TO PREVIOUS MESSAGE.
f245	a708 a709	PLEASE RETURN CALL.
f246	a210	MESSAGE ADDRESSED TO
f247	a211	TO ADD TO LIST,
f248	a713	SCHEDULED
f249	a713	TO CHANGE DELIVERY TIME, DIAL STAR-D. TO APPROVE, DIAL POUND.
f250	a714	TO CHANGE DELIVERY TIME, DIAL STAR-D.
f251	a770 a771 a773 a774	17) TRANSFER USING EXTENSION INSTEAD, DIAL STAR-A.
f252	a206	TO RESPOND TO THIS MESSAGE, DIAL 1.
f253	a819	PLEASE ENTER MONTH, DAY
f254	a93 a94	TO PLAY THE ACTIVE VERSION, DIAL 1.
f255	a530	TO DELETE THIS MESSAGE, DIAL STAR-D.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f256	a606 699	AT BEGINNING. TORE-RECORD, DIAL 1. TO PLAY BACK, DIAL 2-3.
f257	a727	TO USE PERSONAL GREETING, DIAL "Y". TO USE SYSTEM GREETING, DIAL "N.
f258	a838 a839	MESSAGE TO
f259	a736 a737	SCHEDULED FOR
f260	a637 a638 a639 a640 a641 a642 a643 a644 a738 a739 a740 a741 a742 a743 a744 a896 a897 a974	SCHEDULED FOR
f261	a637 a638 a639 a640 a641 a642 a643 a644	RESCHEDULED FOR
f262	a269 a270 a271 a272 a286 a287 a295 a296 a355 a356 a357 a358 a489 a490 a491 a492 a505 a506 a658 a659 a660 a661 a663 a664 a665 a666 a668 a669 a670 a671 a676 a677 a678 a679 a745 a746 a808 a809 a810 a811 a884 a885	RECEIVED
f263	a878 a880	YOU ARE RECORDING A SUBSCRIBER NAME.
f264	a637 a744	MESSAGE NOT DELIVERED BECAUSE MAILBOX WAS FULL.
f265	a637 a638	MESSAGE NOT DELIVERED BECAUSE THEIR MAILBOXES WERE FULL.
f267	a359 a613 a835	PLEASE ENTER EXTENSION
f270	a754	SUBSCRIBER ID
f272	a258 a593	CONTACT ADMINISTRATOR FOR HELP.
f274	a103 a298 a70 a712 a762 a763 a945 a953	PLEASE MAKE ENTRY SOON, OR BE DISCONNECTED.
f275	a766	CANNOT GET YOUR MESSAGES NOW, DUE TO MULTIPLE LOGINS TO YOUR MAILBOX.

Fragment Number	Announcements	Fragment Text
f276	a765	TIME REQUESTED HAS PASSED. PLEASE RE-SCHEDULE DELIVERY.
f277	a147 a152 a826 a934 a935	TO EXIT DIRECTORY, DIAL POUND.
f278 f279	a53 a60 a627 a782 a87 a107 a807 a853 a854 a95	PLEASE ENTER EXTENSION ENTER ANNOUNCEMENT SET AND POUND SIGN.
f280	a107 a95	FOR ADMIN VERSION, DIAL 2.
f281	a808 a809 a810 a811 a884	MESSAGE FROM
f282	a10 a100 a101 a105 a106 a107 a108 a113 a114 a115 a116 a117 a119 a120 a121 a123 a125 a126 a127 a128 a129 a13 a159 a168 a169 a170 a171 a172 a19 a20 a24 a25 a26 a28 a30 a32 a38 a39 a40 a41 a42 a43 a44 a45 a48 a5 a50 a51 a57 a58 a59 a62 a63 a64 a65 a66 a67 a724 a726 a76 a77 a78 a79 a80 a82 a83 a85 a9 a93 a932 a933 a936 a937 a938 a94 a940 a941 a942 a943 a95 a96 a960 a97 a98 a99	TO HAVE SYSTEM WAIT, DIAL STAR-W. TO ACCESS THE NAMES OR NUMBERS DIRECTORY, DIAL STAR-STAR-N. IF FINISHED, PLEASE HANG UP OR TO DISCONNECT AUDIX, DIAL STAR-STAR-X.
f283	a814	YOUR MAILBOX IS MORE THAN
f284	a814	PERCENT FULL. PLEASE DELETE UNNEEDED MESSAGES OR GREETINGS.
f285	a19 a6 a912	TO ADD A MEMBER, ENTER EXTENSION
f286	a20 a7	TO ADD A MEMBER, ENTER LAST NAME
f287	a815	WELCOME TO AUDIX.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f288	a147 a934	YOU ARE IN THE NAMES DIRECTORY. TO FIND A SUBSCRIBER'S EXTENSION, ENTER THE LAST NAME FOLLOWED BY THE POUND SIGN. TO ENTER THE LETTER Q, DIAL 7. FOR Z, DIAL 9. TO LOOKUP BY EXTENSION INSTEAD DIAL STAR-A.
f290	a171 a172 a936 a937	IF YOU WISH TO SPECIFY A NON-AUDIX SUBSCRIBER, FIRST CHANGE TO EXTENSION ADDRESSING BY DIAL STAR-A.
f291	a113 a114 a1140 a115 a121 a125 a127 a129 a15 a18 a4 a68 a69 a70 a71 a77 a8 a920 a921 a938 a939 a940 a941 a942 a947 a949 a951 a952 a953 a955 a956 a957 a958 a961	TO TRANSFER TO ANOTHER EXTENSION, DIAL STAR-T.
f292	a101 a118 a122 a124 a24 a26 a34 a40 a41 a42 a44 a47 a49 a68 a72 a73 a74 a81 a86 a880 a881 a925 a926 a927 a928 a929 a930 a943 a96 a961	TO MAKE THE AUDIX OUTPUT LOUDER, DIAL 4. (USEFUL IF YOUR TDD IS HAVING TROUBLE "HEARING" AUDIX.) TO MAKE THE AUDIX OUTPUT SOFTER, DIAL 7. (USEFUL IF AUDIX IS HAVING TROUBLE "HEARING" YOUR TOUCHTONE COMMANDS.) THE COMMANDS 8 (SLOWER) and 9 (FASTER) ARE FOR VOICE MESSAGING ONLY.
f293	a817	NOTHING TO PLAY BACK.
f294	a179 a40	TO ADD ENTRIES, DIAL 1.
f295	a468 a477	TONE-ENTER LIST, DIAL STAR-L.
f296	a501	TO DELETE, DIAL STAR-D.
f297	a55 a66	TO SPECIFY OWNER BY EXTENSION, DIAL STAR-A.
f298	a54 a65	TO SPECIFY OWNER BY NAME, DIAL STAR-A.
f299	a26 a50	YOU ARE ADMINISTERING YOUR GREETING.
f300	a904	A.M.

Fragment Number	Announcements	Fragment Text
f302	a30	FRAGMENTS. ENTER FRAGMENT ID FOLLOWED BY POUND SIGN. REFER TO ADMIN MANUAL FOR CORRECT ID.
f303	a32	YOU ARE RECORDING NAMES. ENTER
f304	a101 a68 a880 a881 a943 a961	TO PLAY BACK MESSAGE, DIAL 2-3. TO DELETE YOUR MESSAGE, DIAL STAR-D. TO APPROVE YOUR MESSAGE, DIAL POUND.
f305	a113 a114 a115 a119 a120 a121 a125 a127 a129 a159 a76 a77	YOU ARE AT THE ACTIVITY MENU.
f306	a10 a14 a16 a51	YOU ARE CHANGING YOUR PASSWORD.
f307	a57 a854 a93	YOU ARE PLAYING ANNOUNCEMENTS.
f308	a58 a853 a94	YOU ARE PLAYING ANNOUNCEMENT FRAGMENTS.
f309	a59 a95	YOU ARE PLAYING NAMES.
f310	a3	JANUARY
f311		FEBRUARY
f312		MARCH
f313		APRIL
f314		MAY
f315		JUNE
f316		JULY
f317		AUGUST
f318		SEPTEMBER
f319		OCTOBER
f320		NOVEMBER
f321		DECEMBER
f322	a152 a935	YOU ARE IN THE NUMBERS DIRECTORY. TO FIND A SUBSCRIBER'S NAME ENTER THE EXTENSION FOLLOWED BY THE POUND SIGN. TO LOOKUP BY NAME INSTEAD, DIAL STAR-A.
f323	a123 a126 a128 a168 a169 a170 a62 a85	YOU ARE RESPONDING TO A PIECE OF INCOMING MAIL.

Fragment Number	Announcements	Fragment Text
f324	a78	YOU ARE SELECTING WHICH GREETING WILL BE PLAYED TO CALLERS. IF YOU WANT YOUR PERSONAL GREETING TO BE PLAYED, DIAL "Y" FOR YES. IF YOU DIAL "N" FOR NO, THE SYSTEM GREETING WILL BE USED.
f325	a137	YOU ARE ADMINISTERING YOUR LISTS. TO CREATE A MAILING LIST, DIAL 1. TO PLAY A SUMMARY OF ALL YOUR LISTS, DIAL 2.1'0 REVIEW A PARTICULAR LIST, DIAL 3.
f326	a83	YOU ARE DOING SYSTEM ADMINISTRATION. TO RECORD NAMES, DIAL 4. TO PLAY NAMES, DIAL 5. TO RECORD A MACHINE NAME, DIAL 6. TO PLAY A MACHINE NAME, DIAL 7. TO RECORD FRAGMENTS, DIAL 1. TO PLAY FRAGMENTS, DIAL 2. TO PLAY ANNOUNCEMENTS, DIAL 3.
f327	a19 a20 a45	YOU ARE CREATING A MAILING LIST.
f328	a19 a20 a6 a7 a912	TO DELETE THE PREVIOUS ENTRY, DIAL STAR-D. TO ADD A MAILING LIST YOU HAVE ALREADY CREATED, OR A PUBLIC LIST OWNED BY OTHERS, DIAL STAR-L. TO REVIEW OR MODIFY THE LIST YOU ARE CREATING, DIAL STAR-1. TO APPROVE THE LIST YOU ARE CREATING AND MOVE ONTO THE NEXT STEP, DIAL POUND.
f329	a45 a67 a861	YOU HAVE NOT YET ENTERED ENOUGH CHARACTERS TO IDENTIFY A SPECIFIC SUBSCRIBER. TO ENTER THE LETTER Q, DIAL 7. FOR Z, DIAL 9.
f330	a12 a87	OR ENTER JUST THE POUND SIGN IF IT'S YOUR PHONE.
f331	a790	PERSONAL GREETING USED.

Fragment Number	Announcements	Fragment Text
f332	a380 a381 a382 a383 a384 a385 a386 a387 a388 a389 a390 a391 a392 a393 a792 a793 a794 a795 a796 a797 a798 a799 a800 a801 a802 a803 a804 a805 a806	SYSTEM GREETING USED.
f333	a44 a913	TO ADD ENTRIES TO THE LIST OR TO CHANGE STATUS OF LIST, DIAL 1.
f334	a212	WHEN FINISHED ADDRESSING, DIAL POUND.
f335	a194 a196 a218 a222 a771 a774	WHEN FINISHED, DIAL POUND.
f336	a211	TO REVIEW ADDRESSEES, DIAL STAR-1.
f338	a93 a94	TO PLAY THE ADMIN VERSION, DIAL 2.
f339	a118 a122 a124 a24 a26 a34 a47 a72 a73 a74 a86 a880 a881 a924 a925 a926 a927 s928 a929 a96	(OPTION 5, REPLAY THE LAST FEW SECONDS, AND OPTION 6, ADVANCE A FEW SECONDS, DO NOT WORK RELIABLY FOR TDD MESSAGES.)
f340	a84	ENTER THE HOUR, ONE THROUGH TWELVE, THEN TWO DIGITS FOR THE MINUTES, THEN "A" FOR AM OR "P" FOR PM, AND THE POUND SIGN.
f341	a33	ENTER THE NUMBER OF THE MONTH, ONE THROUGH TWELVE, THEN TWO DIGITS FOR THE DAY OF THE MONTH, THEN THE POUND SIGN.
f342	a541 a542 a545 a546 a549 a550 a553 a554	ELECTRONIC DOCUMENT COMMUNICATION
f343	a539 a540 a541 a542 a543 a544 a545 a546 a555	LEAVE WORD CALLING
f344	a543 a544 a545 a546 a551 a552 a553 a554	MESSAGE CENTER SERVICE
f345	a184 a185 a190 a236	MAIL

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f346	a879 a881	YOU ARE RECORDING A MACHINE NAME.
f347	a29 a31 a54 a55	YOU ARE ADDING A LIST.
f348	a63 a64 a65 a66 a67	YOU ARE SPECIFYING A MAILING LIST TO REVIEW.
f349	a463 a472 a482 a483 a654 a655	TO APPROVE LIST AS IS, DIAL POUND.
f350	a3	SUNDAY
f351		MONDAY
f352		TUESDAY
f353		WEDNESDAY
f354		THURSDAY
f355		FRIDAY
f356		SATURDAY
f357	a61 a939	YOU ARE CHOOSING BETWEEN SUBSCRIBERS WHOSE NAMES MATCH YOUR ENTRY. TO INDICATE NO SUBSCRIBERS MATCH, DELETE ENTRY BY DIALING STAR-D. TO CHANGE TO EXTENSION ADDRESSING AND DELETE YOUR ENTRY, DIAL STAR-A.
f358	a39	YOU ARE IDENTIFYING A LIST AS PRIVATE OR PUBLIC.
f359	a43	YOU ARE CHANGING THE STATUS OF YOUR LIST. TO MODIFY STATUS, DIAL "Y" FOR YES OR "N" FOR NO.
f360	a41	YOU ARE SCANNING MAILING LISTS. TO REVIEW LIST MEMBERS, DIAL ZERO. TO REWIND TO PREVIOUS LIST, DIAL 2.70 CONTINUE SCANNING LISTS, DIAL 3.
f361	a41	TO SKIP TO NEXT LIST, DIAL POUND. TO DELETE LIST, DIAL STAR-D.
f362	a54 a55 a65 a66	IF YOU OWN THE LIST, DIAL POUND. IF SOMEONE ELSE OWNS THE LIST
f363	a29 a31 a63 a64	TO APPROVE THE LIST YOU ARE CREATING, DIAL POUND.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f364	a54 a65	ENTER OWNER'S EXTENSION
f365	a55 a66	ENTER OWNER'S NAME
f366	a29 a63	TO SPECIFY A DIFFERENT OWNER BY EXTENSION, DIAL STAR-D.
f367	a31 a64	TO SPECIFY A DIFFERENT OWNER BY NAME, DIAL STAR-D.
f368	a38	YOU ARE ENTERING THE NUMBER FOR A NEW LIST. PLEASE ENTER A NUMBER UP TO SIX DIGITS LONG
f369	a38	TO REPLACE AN EXISTING LIST, ENTER THAT LIST'S NUMBER,
f370	a40 a44	THESE ARE ENTRIES IN YOUR LIST.
f371	a40 a42 a44	TO REWIND TO CURRENT ENTRY, DIAL 2. TO REWIND TO PREVIOUS ENTRIES, DIAL 2 AS MANY TIMES AS NECESSARY. TO CONTINUE PLAYBACK OF LIST, DIAL 3.
f372	a157 a228 a40 a44	TO SKIP TO NEXT ENTRY, DIAL POUND. TO DELETE CURRENT ENTRY, DIAL STAR-D.
f373	a25	YOU ARE CHOOSING WHETHER TO INCLUDE ORIGINAL MESSAGE WITH YOUR REPLY. TO INCLUDE THE ORIGINAL, DIAL "Y" FOR YES. TO SEND ONLY YOUR REPLY, DIAL "N" FOR NO.
f374	a82	YOU ARE CHOOSING WHETHER TO FILE THIS MESSAGE. TO FILE A COPY, DIAL "Y" FOR YES. TO SEND WITHOUT FILING A COPY, DIAL "N" FOR NO.
f375	a72 a926	YOU ARE GETTING YOUR INCOMING MESSAGES. TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RESPOND TO THE MESSAGE, DIAL 1.
f376	a124 a72 a73 a81 a86	TO SKIP TO THE NEXT HEADER, DIAL THE POUND SIGN. TO PLAY BACK THE HEADER, REWIND BY DIALING 2, THEN PLAY BY DIALING 3. TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.

Fragment Number	Announcements	Fragment Text
f377	a118 a122 a124 a72 a73 a86 a924 a925 a926 a927 a928 a929	TO DELETE MESSAGE, DIAL STAR-D.
f378	a73 a81 a86 a928 a929 a930	YOU ARE CHECKING THE STATUS OF YOUR OUTGOING MESSAGES.
f379	a81 a930	TO DELETE STATUS INFORMATION, DIAL STAR-D.
f380	a102 a104 a299 a69 a71 a775 a813 a944 a946 a951 a952	PLEASE WAIT.
f381	a86 a928	TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RE-RECORD MESSAGE BEFORE DELIVERY, DIAL 1.
f382	a33 a84	YOU ARE SCHEDULING YOUR MESSAGE FOR DELIVERY.
f383	a266 a862 a863	PLEASE ENTER HOUR, THEN TWO DIGITS FOR MINUTES, THEN "A" FOR AM OR "P" FOR PM, AND POUND SIGN.
f384	a161 a162 a261 a90 a92	PLEASE ENTER NUMBER OF MONTH, THEN TWO DIGITS FOR DAY, AND POUND SIGN.
f385	a75	TO APPROVE DELIVERY TIME, DIAL POUND. TO MODIFY DELIVERY TIME, DIAL STAR-D AND WAIT FOR FURTHER INSTRUCTIONS.
f386	a520	CANNOT CHANGE A DELIVERED MESSAGE.
f387	a641 a642 a742	MESSAGE NOT DELIVERED BECAUSE RECIPIENT NOT FOUND.
f388	a192 a206 a276 a315 a346 a507 a508 a530 a730 a747 a924 a926 a928 a929 a930	TO SKIP, DIAL POUND.
f389	a192 a206 a276 a326 a34 a507 a527 a892 a893 a907	TO DELETE, DIAL STAR-D.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f390	a820 a843 a903	ZERO
f391	a844	ONE
f392	a845	TWO
f393	a846	THREE
f394	a847	FOUR
f395	a848	FIVE
f396	a849	SIX
f397	a850	SEVEN
f398	a851	EIGHT
f399	a852	NINE
f400	a972	TEN
f401		ELEVEN
f402		TWELVE
f403		THIRTEEN
f404		FOURTEEN
f405		FIFTEEN
f406		SIXTEEN
f407		SEVENTEEN
f408		EIGHTEEN
f409		NINETEEN
f410		TWENTY
f411		TWENTY-ONE
f412		TWENTY-TWO
f413		TWENTY-THREE
f414		TWENTY-FOUR
f415		TWENTY-FIVE
f416		TWENTY-SIX
f417		TWENTY-SEVEN
f418		TWENTY-EIGHT
f419		TWENTY-NINE
f420		THIRTY

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f421		THIRTY-ONE
f422		THIRTY-TWO
f423		THIRTY-THREE
f424		THIRTY-FOUR
f425		THIRTY-FIVE
f426		THIRTY-SIX
f427		THIRTY-SEVEN
f428		THIRTY-EIGHT
f429		THIRTY-NINE
f430		FORTY
f431		FORTY-ONE
f432		FORTY-TWO
f433		FORTY-THREE
f434		FORTY-FOUR
f435		FORTY-FIVE
f436		FORTY-SIX
f437		FORTY-SEVEN
f438		FORTY-EIGHT
f439		FORTY-NINE
f440		FIFTY
f441		FIFTY-ONE
f442		FIFTY-TWO
f443		FIFTY-THREE
f444		FIFTY-FOUR
f445		FIFTY-FIVE
f446		FIFTY-SIX
f447		FIFTY-SEVEN
f448		FIFTY-EIGHT
f449		FIFTY-NINE
f450	a820	SIXTY
f451		SEVENTY
f452		EIGHTY

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f453		NINETY
f454	a901	HUNDRED
f455	a906	THOUSAND
f456	a906	MILLION
f457		NINETIETH.
f458		HUNDREDTH.
f459		THOUSANDTH.
f460		MILLIONTH.
f461		BILLIONTH.
f462	a824	POUND
f463	a823	STAR
f464	a213 a217 a218 a219 a654	ENTER EXTENSIONS
f465	a214 a221 a222 a223 a655	ENTER LAST NAME
f466	a735	CREATED
f468	a488 a749	TO CONTINUE PLAYING, DIAL 3.
f469	a497 a499 a890	ENTER OWNER'S EXTENSION
f470	a498 a500 a891	ENTER OWNER'S LAST NAME
f471	a497 a498 a499 a500 a890 a891	IF IT'S YOUR LIST, DIAL POUND.
f472	a326 a749	TO APPROVE, DIAL POUND. TO RECORD FROM HERE, DIAL 1.
f473	a682	FILED
f474	a346 a507 a73 a929	TO PLAY BACK, DIAL ZERO. TO CHANGE OR SEND AGAIN, DIAL 1.
f475	a751	TO FILE A COPY, DIAL "Y" FOR YES OR "N" FOR NO.
f477	a717 a963	DIAL 1 TO SELECT
f478	a718 a964	DIAL 2 TO SELECT
f479	a719 a965	DIAL 3 TO SELECT
f480	a720 a966	DIAL 4 TO SELECT

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f481	a721 a967	DIAL 5 TO SELECT
f482	a724 a725 a726 a827 a940 a941	DIAL POUND TO SELECT
f483	a724 a725 a726 a827 a940 a941	OR ENTER MORE CHARACTERS
f484	a45 a521 a67 a861	ENTER MORE CHARACTERS FOLLOWED BY THE POUND SIGN. IF YOU JUST COMPLETED ENTERING THE LAST NAME, ENTER THE FIRST NAME.
f485	a455 a456	HAS
f486	a126 a168 a204 a62 a693 a760 a768 a85	TO REPLY TO SENDER BY MAIL, DIAL 1.
f487	a33	TO DELETE TIME, DIAL STAR-D. TO DEFAULT REST OF THE DELIVERY TIME, DIAL POUND.
f488	a84	TO SPECIFY IMMEDIATE DELIVERY, DIAL POUND. OTHERWISE
f491	a124 a924	YOU ARE GETTING YOUR INCOMING MESSAGES. TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RESPOND TO THE MESSAGE, DIAL 1.
f492	f448	OWNER ERASED.
f493	a116 a117 a171 a172 a932 a933 a936 a937	YOU ARE REQUESTING A TRANSFER.
f494	a457	PRIVATE.
f495	a458	PUBLIC.
f496	a532	FILED.
f497		TO REVIEW YOUR MESSAGE, DIAL STAR-1.
f498	a466 a889	PLEASE ENTER A NEW LIST ID
f499	a750	WHEN FINISHED RECORDING, DIAL POUND TO APPROVE, OR 1 TO EDIT YOUR MESSAGE.
f500	a627	THIS IS AUDIX.
f501	a723	TO RECORD MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO ADMINISTER ATTENDANT MENU, DIAL 3.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f502	a24 a246 a96	TO RECORD ATTENDANT MENU, DIAL 1. TO PLAY BACK ATTENDANT MENU, DIAL ZERO.
f503	a24 a96	YOU ARE ADMINISTERING YOUR ATTENDANT MENU.
f504	a252	TRANSFERRING TO AN OPERATOR,
f505	a248	YOU HAVE SELECTED AN INVALID OPTION.
f506	a247	MENU APPROVED AND ACTIVATED.
f507	a282 a297 a298	THE PERSON YOU CALLED IS NOT AVAILABLE. TO LEAVE A MESSAGE, USE TOUCHTONES TO RE-ENTER THE NUMBER YOU CALLED.
f508	a253	ATTENDANT SERVICE NOT AVAILABLE, TRY AGAIN LATER
f509	a601	SYSTEM NOT ADMINISTERED FOR OUTCALLING.
f510	a614 a615 a886	NUMBER
f511	a299 a712	IF YOU DO NOT HAVE A TOUCHTONE TELEPHONE,
f512	a772	YOUR CALL IS BEING TRANSFERRED TO AN OPERATOR.
f513	a279	BEGIN YOUR MESSAGE BY TYPING (NOT DIALING) THE NAME AND TELEPHONE NUMBER OF THE PERSON YOU ARE CALLING. SOMEONE WILL CHECK THE START OF YOUR MESSAGE, AND THEN FORWARD THE COMPLETE MESSAGE TO THE PERSON YOU CALLED.
f514	a712	OTHERWISE
f515	a104 a71 a775 a946 a951	TO BE TRANSFERRED TO AN OPERATOR,
f516	a102 a69 a944 a952	TO LEAVE A MESSAGE THAT WILL BE DELIVERED AS SOON AS POSSIBLE,

Fragment Number	Announcements	Fragment Text
f517	a102 a103 a104 a69 a70 a71 a944 a945 a946 a951 a952 a953	YOU ARE ENTERING THE NUMBER OF THE PERSON FOR WHOM YOU ARE LEAVING A MESSAGE. THIS MAY BE THE COMPLETE NUMBER YOU DIALED OR SIMPLY THE EXTENSION. FOR A FASTER RESPONSE, TERMINATE YOUR ENTRY WITH A POUND SIGN.
f518	a101 a68 a943 a961	YOU ARE CREATING A TDD MESSAGE THAT WILL BE DELIVERED TO THE PERSON SPECIFIED IN YOUR MESSAGE AS SOON AS POSSIBLE. PLEASE BE AWARE THAT, IN ORDER TO FORWARD THIS MESSAGE TO THE RECIPIENT, SOMEONE WILL HAVE TO PLAY BACK THE NAME AND NUMBER PORTION.
f519	a628	YOU ARE NOT AUTHORIZED FOR OUTCALLING.
f520	a629 a630 a631 a632 a633	YOUR OUTCALLING NUMBER,
f521	a618 a619 a630 a631 a632 a633	TURNED ON
f522	a617 a629	TURNED OFF. TO RESTART AT THE ACTIVITY MENU, DIAL STAR-R.
f523	a630 a631 a632 a633	FOR
f524	a22 a237 a625 a626 a631 a633 656 a657 a758	TO
f525	a624 a630 a632	ANYTIME
f526	a624 a625 a626 a630 a631 a632 a633	SUBJECT TO ADMINISTRATOR RESTRICTIONS
f527	a108 a28 a307 a629 a630 a631 a632 a633 a97	TO CHANGE NUMBER, DIAL 1. TO CHANGE TIMES, DIAL 2. FOR INSTRUCTIONS ON ENTERING YOUR OUTCALLING NUMBER, DIAL 3.
f528	a108 a28 a307 a629 a630 a631 a632 a633 a97	TO TURN ON, DIAL "Y". TO TURN OFF, DIAL "N".
f529	a108 a28 a97	YOU ARE CHANGING YOUR OUTCALLING OPTIONS.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f530	a617 a618 a619	OUTCALLING
f531	a621	ENTER OUTCALLING NUMBER
f532	a620	TO CHANGE YOUR OUTCALLING PHONE NUMBER, DIAL 1 AND ENTER THE NUMBER TO BE CALLED FOLLOWED BY THE POUND SIGN. ANYTHING YOU ENTER WILL BE INTERPRETED AS PART OF THE CALLED NUMBER. NO GLOBAL COMMANDS SUCH AS STAR-H WILL BE ACCEPTED AT THIS TIME.
f533	a764	TOO MANY DIGITS.
f534	a623	YOUR OUTCALLING NUMBER IS
f535	a106 a616 a80	FOR OUTCALLING ANY TIME, DIAL 1. FOR OUTCALLING DURING PRIME TIME, DIAL 2. TO SPECIFY YOUR TIMES, DIAL 3. FOR SYSTEM OUTCALLING SCHEDULE, DIAL 4.
f536	a105 a106 a79 a80	YOU ARE SPECIFYING YOUR OUTCALLING TIME PERIOD. THE TIME YOU SPECIFY WILL BE RESTRICTED BY THE TIMES ALLOWED BY THE SYSTEM ADMINISTRATOR.
f537	a734	ENTER THE STARTING HOUR, MINUTES, "A" OR "P", AND POUND SIGN.
f538	a325	ENTER THE ENDING HOUR, MINUTES, "A" OR "P", AND POUND SIGN.
f539	a758	THE SYSTEM ALLOWS OUTCALLS FROM
f540	a237	AND FROM
f541	a781	UP TO
f542	a781	DIGITS MAY BE USED.
f543	a53 a627	TO AVOID FURTHER NOTIFICATION OF THESE MESSAGES, DIAL STAR-POUND.
f544	a624 a625 a626	OUTCALLING SPECIFIED FOR
f545	a105 a79	TO DELETE OWN TIME, DIAL STAR-D.
f546	a825	PAUSE
f547	a197 a872	GOOD-BYE.

Fragment Number	Announcements	Fragment Text
f548	a582	YOU HAVE NO ATTENDANT MENU.
f549	a48 a99	YOU ARE ADMINISTERING YOUR ATTENDANT MENU. TO CREATE ATTENDANT MENU, DIAL 1.
f550	a24 a96	TO REWIND YOUR ATTENDANT MENU, DIAL 2. TO DELETE IT, DIAL STAR-D. TO STOP PLAYBACK OF YOUR ATTENDANT MENU, DIAL 3.
f551	a53 a627	TO ACCESS YOUR MESSAGES,
f552	a334 a335 a336	IS NOT AUTHORIZED TO RECEIVE MESSAGES.
f553	a335	YOU MAY ENTER ANOTHER NUMBER
f555	a101 a102 a103 a104 a15 a17 a18	TO ACCESS YOUR MAILBOX, DIAL STAR-R
f556	a621	TO EXIT, DIAL STAR-POUND NOW.
f557	a620	IN MOST CASES, ENTERING A STAR OR POUND AS THE FIRST DIGIT WILL RESULT IN THE STAR OR POUND BEING OUTPULSED. A STAR ENTERED AS PART OF THE DIGIT STRING WILL BE INTERPRETED AS A PAUSE OF ONE AND A HALF SECONDS. IF A LONGER PAUSE IS REQUIRED, USE MULTIPLE STARS IN A ROW.
f559	a570	A NAME CANNOT BE RECORDED UNTIL THE SIZE OF THE NAMES FILE SYSTEM IS INCREASED.
f560	a620	IF YOU ARE PROGRAMMING A NUMBER TO CALL A PAGER THAT REQUIRES A POUND SIGN TERMINATION, DIAL 'Y' TO RECEIVE FURTHER HELP. OTHERWISE, DIAL 'N' TO RETURN TO OUTCALLING ADMINISTRATION.
f561	a6 a7 a912	YOU ARE ADDRESSING YOUR MESSAGE.
f562	a116 a117 a193 a194 a195 a196 a894 a932 a933	ENTER THE

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f563	a116 a117 a193 a194 a195 a196 a932 a933	DIGIT EXTENSION
f564		THERE IS NO ROOM IN THE MAILBOX TO LEAVE A MESSAGE.
f565	a309	OUTCALL CANCELED FOR NEW MESSAGES CURRENTLY IN MAILBOX.
f566	a53	YOU ARE RESPONDING TO AN OUTCALL NOTIFYING YOU OF NEW MESSAGES.
f567	a53	EITHER LOGGING IN OR DIALING STAR-POUND WILL RESULT IN THE OUTCALL BEING CANCELED FOR THE NEW MESSAGES CURRENTLY IN YOUR MAILBOX. IF ADDITIONAL NEW MESSAGES ARRIVE, ANOTHER OUTCALL WILL BE SCHEDULED.
f569	a697	TO MODIFY, DIAL 1. IF FINISHED, DIAL STAR-POUND.
f570	a512 a883	RECORDED NAME TOO LONG
f571	a610	NON-EXISTENT SUBSCRIBER
f572		TO ACCESS THE OPTIONS MENU, DIAL STAR-M.
		PRIVATE
f575	a590	CANNOT FORWARD A PRIVATE MESSAGE
f576		RECIPIENTS CAN FORWARD THIS MESSAGE
f577	a118 a122 a124 a72 a924 a925 a926 a927	TO HOLD THE MESSAGE IN ITS CURRENT CATEGORY, DIAL STAR-STAR-H.
f578	a924 a925 a926 a927 a928 a929 a930	TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.
f579	a443 a444	PASSWORD MUST BE
f580	a250 a251	CANNOT ATTACH A PRIVATE MESSAGE
f581	a251	DIAL "N" NOW

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f582	a514	AUDIX PASSWORDS MUST NOW BE AT LEAST
f584	a643 a644 a743	MESSAGE NOT DELIVERED BECAUSE SPECIAL FEATURE DENIED ON RECIPIENT'S MACHINE.
f585	a873	ZERO
f586	a180 a42	TO SKIP, DIAL POUND.
f587	a42	YOU ARE REVIEWING A LIST.
f588	a514	OR MORE DIGITS.
f589	a622	FOR PAGERS REQUIRING A POUND SIGN TERMINATION, START YOUR NUMBER WITH A DOUBLE POUND SIGN. THIS WILL RESULT IN A SINGLE POUND BEING OUTPUTTED AT THE END OF THE DIGIT STRING. THEN, A STAR OR POUND IN THE NEXT POSITION WILL BE INTERPRETED AS PART OF THE OUTCALLING NUMBER.
f590	a622	A STAR ENTERED AS PART OF THE DIGIT STRING WILL BE INTERPRETED AS A PAUSE OF ONE AND A HALF SECONDS. IF A LONGER PAUSE IS REQUIRED, USE MULTIPLE STARS IN A ROW.
f591	a52	TO CHANGE YOUR OUTCALLING PHONE NUMBER, DIAL 1. TO SEE FURTHER INSTRUCTIONS ON PROGRAMMING A PAGER, DIAL "Y". TO RETURN TO OUTCALLING ADMINISTRATION, DIAL "N".
f592	a199	AUDIX PASSWORDS MUST NOW BE
f593	a199 a514	PLEASE CHOOSE A NEW PASSWORD OF
f600	a557	NEW BROADCAST MESSAGES.
f601	a183 a184 a190 a235 a875	PRIORITY
f602	a210 a236 a273 a342 a343 a344 a345 a493 a673 a675 a767 a838 a839 a840 a841	OTHER

Fragment Number	Announcements	Fragment Text
f603	a538 a540 a541 a543 a545 a547 a549 a551 a553 a555	YOU ALSO HAVE
f604	a690	AS YOU USE AUDIX YOUR NAME WILL BE INCLUDED IN SYSTEM ANNOUNCEMENTS THAT YOU AND OTHER TDD USERS WILL SEE. DIAL 1, WAIT FOR THE "GA" PROMPT, AND THEN TYPE YOUR NAME ON YOUR TDD. AFTER TYPING YOUR NAME, DIAL 1 AGAIN.
f606	a241	TO RE-RECORD YOUR NAME, DIAL 1. TO APPROVE, DIAL POUND.
f607	a650	NAME CANNOT BE SAVED AT THIS TIME, PLEASE CONTINUE
f608	a167 a599 a692 a883	WAIT FOR THE "GA PROMPT, THEN TYPE YOUR NAME. WHEN YOU HAVE FINISHED TYPING YOUR NAME, DIAL 1.
f609	a583	NO ROOM TO SAVE BROADCAST MESSAGE. IT WILL BE RETAINED IN THE NEW MESSAGE CATEGORY.
f610	a150	YOU ARE RECORDING YOUR NAME. YOU CAN ACCESS OTHER AUDIX FEATURES AFTER YOU RECORD YOUR NAME. AS YOU USE AUDIX YOUR NAME WILL BE INCLUDED IN SYSTEM ANNOUNCEMENTS THAT YOU AND OTHER TDD USERS WILL SEE. DIAL 1 AND, AFTER YOU SEE THE "GA PROMPT, PLEASE USE YOUR TDD TO TYPE YOUR FIRST AND LAST NAME AS YOU WOULD LIKE OTHERS TO SEE IT'. AFTER TYPING YOUR NAME, DIAL 1 AGAIN. NOTE: YOU MUST FINISH TYPING YOUR NAME IN TWELVE SECONDS OR LESS.
f611	a151	YOU ARE RECORDING YOUR NAME. TO RECORD YOUR NAME, DIAL 1. AFTER RECORDING, DIAL 1 AGAIN. TO PLAY BACK YOUR RECORDING, DIAL 2-3. TO APPROVE YOUR RECORDING, DIAL POUND.
f612	a149 a519	TO MAKE PRIVATE, DIAL 1.
f613	a518	TO MAKE PRIORITY, DIAL 2.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f614	a515	TO MAKE BROADCAST, DIAL 8.
f615	a516	TO MAKE A LOGIN ANNOUNCEMENT, DIAL 9.
f617	a705 a919	TO REMOVE PRIVATE STATUS, DIAL 1.
f618	a704	TO REMOVE PRIORITY STATUS, DIAL 2.
f619	a700	TO REMOVE BROADCAST STATUS, DIAL 8.
f620	a701	17) REMOVE LOGIN ANNOUNCEMENT STATUS, DIAL 9.
f621	a866	PRIVATE.
f622	a876	NOT PRIORITY.
f623	a275	BROADCAST.
f624	a495	LOGIN ANNOUNCEMENT.
f625	a208 a209 a831 a833	TO ACTIVATE MESSAGE WAITING NOTIFICATION, DIAL 1.
f626	a143 a146 a209 a731 a732 a831 a832 a833	TO SPECIFY EXPIRATION DATE, DIAL 2.
f627	a239 a832 a833	TO APPROVE BROADCAST OPTIONS, DIAL POUND.
f628	a146 a311 a832	TO DEACTIVATE MESSAGE WAITING NOTIFICATION, DIAL 1.
f629	a716	PLEASE ENTER MONTH, DAY, AND POUND SIGN.
f630	a303	TO CHANGE EXPIRATION DATE FROM
f631	a227 a536	MESSAGE WAITING NOTIFICATION ACTIVATED.
f632	a227 a333	EXPIRATION DATE WILL BE
f633	a517	TO MAKE NON-INTERRUPTIBLE, DIAL 1.
f634	a240 a732	TO APPROVE LOGIN ANNOUNCEMENT OPTIONS, DIAL POUND.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f635	a702	TO REMOVE NON-INTERRUPTIBLE STATUS, DIAL 1.
f636	a564	LOGIN ANNOUNCEMENT WILL BE NON-INTERRUPTIBLE.
f637	a438 a439 a440	INVALID DATE.
f638	f638	IS PRIOR TO DELIVERY DATE, PLEASE RE-SCHEDULE.
f639	a260	MESSAGE CANNOT BE BOTH BROADCAST AND PRIORITY.
f640	a256	MESSAGE CANNOT BE BOTH A LOGIN ANNOUNCEMENT AND PRIORITY.
f641	a257	MESSAGE CANNOT BE BOTH A LOGIN ANNOUNCEMENT AND PRIVATE.
	a259	MESSAGE CANNOT BE BOTH BROADCAST AND A LOGIN ANNOUNCEMENT.
f643	a149	YOU ARE CHOOSING OPTIONS FOR THIS MESSAGE. THERE ARE NO OPTIONS CURRENTLY SET.
f644	a155	YOU ARE CHOOSING OPTIONS FOR THIS MESSAGE. WITH THE CURRENT SETTINGS,
f645	a145 a149	PRIVATE MESSAGES CANNOT BE FORWARDED BY THE RECIPIENTS.
f646	a144	A PRIORITY MESSAGE WILL BE DELIVERED BEFORE OTHER MESSAGES AND WILL BE FLAGGED FOR SPECIAL ATTENTION IN THE RECIPIENT'S MAILBOX.
f647	a842	THE MESSAGE WILL BE PRIVATE.
f648	a156	THE MESSAGE WILL BE PRIORITY.
f649	a135	THE MESSAGE WILL BE BROADCAST.
f650	a139	THE MESSAGE WILL BE A LOGIN ANNOUNCEMENT.
f651	a164	THE MESSAGE WILL BE PRIVATE AND PRIORITY.

Fragment Number	Announcements	Fragment Text
f652	a140	A BROADCAST MESSAGE IS DELIVERED TO EVERY SUBSCRIBER ON THIS MACHINE. YOU MAY ALSO ADDRESS BROADCAST MESSAGES TO SUBSCRIBERS ON OTHER MACHINES.
f653	a274	FOR BROADCAST OPTIONS, DIAL STAR-M.
f654	a134	THE MESSAGE WILL BE BROADCAST AND PRIVATE.
f655	a141	A LOGIN ANNOUNCEMENT WILL BE PLAYED EACH TIME ANY SUBSCRIBER LOGS ONTO THIS MACHINE. YOU MAY ALSO ADDRESS A LOGIN MESSAGE TO SUBSCRIBERS ON OTHER MACHINES.
f656	a494	FOR LOGIN ANNOUNCEMENT OPTIONS, DIAL STAR-M.
f657	a133	YOU ARE CHOOSING OPTIONS FOR THIS BROADCAST MESSAGE.
f658	a831	MESSAGE WAITING NOTIFICATION IS CURRENTLY NOT ACTIVE.
f659	a130 a146 a209 a831	MESSAGE WAITING NOTIFICATION WILL ALERT ALL LOCAL SUBSCRIBERS ABOUT THIS MESSAGE. THIS OPTION SHOULD BE USED SPARINGLY, BECAUSE IT CAN IMPACT SYSTEM PERFORMANCE.
f660	a160 a161	EXPIRATION DATE SPECIFIES THE LAST DAY THIS BROADCAST MESSAGE WILL BE AVAILABLE TO SUBSCRIBERS. THE EXPIRATION DATE DOES NOT APPLY TO A BROADCAST MESSAGE ALREADY RECEIVED BY A SUBSCRIBER AND SAVED IN THEIR MAILBOX. THE DEFAULT EXPIRATION DATE IS THE SECOND DAY AFTER THE SCHEDULED DELIVERY DATE.
f661	a143 a160 a163	TO APPROVE THESE OPTIONS, DIAL POUND.
f662	a146	MESSAGE WAITING NOTIFICATION IS ACTIVE.

Fragment Number	Announcements	Fragment Text
f663	a110	MESSAGE WAITING NOTIFICATION IS NOT ACTIVE AND THIS MESSAGE HAS AN EXPIRATION DATE OF
f664	a112	MESSAGE WAITING NOTIFICATION IS ACTIVE AND THIS MESSAGE HAS AN EXPIRATION DATE OF
f665	a138	YOU ARE CHOOSING OPTIONS FOR THIS LOGIN ANNOUNCEMENT.
f666	a148	WITH THE CURRENT SETTINGS, THIS LOGIN ANNOUNCEMENT WILL BE NON-INTERRUPTIBLE.
f667		WITH THE CURRENT SETTINGS, THIS LOGIN ANNOUNCEMENT WILL BE INTERRUPTIBLE.
f668	a111	WITH THE CURRENT SETTINGS, THIS LOGIN ANNOUNCEMENT WILL BE NON-INTERRUPTIBLE AND THE LOGIN ANNOUNCEMENT HAS AN EXPIRATION DATE OF
f669	a109	WITH THE CURRENT SETTINGS, THIS LOGIN ANNOUNCEMENT WILL BE INTERRUPTIBLE AND THE LOGIN ANNOUNCEMENT HAS AN EXPIRATION DATE OF
f670	a142 a143	NON-INTERRUPTIBLE STATUS FORCES EACH SUBSCRIBER TO PLAY BACK THE ENTIRE LOGIN ANNOUNCEMENT' EVERY TIME THEY LOG ONTO THIS MACHINE.
f671	a143 a162 a163	EXPIRATION DATE SPECIFIES THE LAST DAY THIS LOGIN ANNOUNCEMENT' WILL BE AVAILABLE TO SUBSCRIBERS. THE DEFAULT EXPIRATION DATE IS THE SECOND DAY AFTER THE SCHEDULED DELIVERY DATE.
f674	a729 a931	DUE TO SENDING RESTRICTIONS, YOU CANNOT SEND MESSAGES TO
f678	a439	IS PAST THE EXPIRATION DATE, PLEASE RESCHEDULE.
f679	a182 5293	IS NOT AVAILABLE. SORRY, YOU CANNOT LEAVE A MESSAGE BECAUSE THIS USER'S MAILBOX IS FULL.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f680	a177 8288	IS BUSY. SORRY, YOU CANNOT LEAVE A MESSAGE BECAUSE THIS USERS MAILBOX IS FULL.
f681	a647	SORRY, CANNOT LEAVE A MESSAGE NOW BECAUSE THIS USER'S MAILBOX IS FULL.
f682	a269 a70 a271 a272	BROADCAST MESSAGE FROM
f683	a268	BROADCASTER HAS DELETED THIS BROADCAST MESSAGE.
f684	a355 a356 a357 a358	PRIVATE, BROADCAST MESSAGE FROM
f685	a676 a677 a678 a679	PRIVATE, PRIORITY MESSAGE FROM
f686	a663 a664 a665 a666	PRIVATE MESSAGE FROM
f687	a779	UNDELIVERABLE MESSAGE NOTIFICATION RECEIVED
f688	a778	AN UNDELIVERABLE MESSAGE WAS RETURNED TO YOUR OUTGOING MAILBOX. TO ACCESS YOUR OUTGOING MAILBOX, DIAL STAR-R-4.
f689	a270 a272 a356 a358 a490 a492 a638 a640 a642 a644 a664 a666 a669 a671 a677 a679 a737 a746 a809 a811	EXPIRATION TIME IS
f690	a668 a669 a670 a671	PRIORITY MESSAGE FROM
f691	a489 a490 a491 a492	LOGIN ANNOUNCEMENT FROM
f692		BROADCAST MESSAGE DELETED.
f693	8273	BROADCAST MESSAGE TO ALL LOCAL SUBSCRIBERS
f694	a675	PRIVATE, BROADCAST MESSAGE TO ALL LOCAL SUBSCRIBERS
f695	a767	PRIVATE, PRIORITY MESSAGE TO

Fragment Number	Announcements	Fragment Text
f696	a841	PRIVATE MESSAGE TO
f697	a493	LOGIN ANNOUNCEMENT TO ALL LOCAL SUBSCRIBERS
f698	a673	PRIORITY MESSAGE TO
f699	a739	MESSAGE NOT DELIVERED BECAUSE ANOTHER LOGIN ANNOUNCEMENT IS ACTIVE.
f700	a165 a166 a755 a756	TO ADMINISTER MAILING LISTS, DIAL 1. TO ADMINISTER PERSONAL DIRECTORY, DIAL 2.
f701	a165 a166 a755 a756	TO CHANGE YOUR PASSWORD, DIAL 4.
f702	a166 a756	TO RECORD YOUR NAME, DIAL 5.
f703	a165 a166	YOU ARE AT SUBSCRIBER ADMINISTRATION
f704	a503	TO CREATE LISTS, DIAL 1. TO SCAN LISTS, DIAL 2. TO REVIEW AND MODIFY LISTS, DIAL 3.
f705	a320	DIRECTORY CONTAINS
f706	a136 a319	TO ADD ENTRIES, DIAL 1. TO REVIEW ALL ENTRIES, DIAL 2. TO REVIEW A SPECIFIC ENTRY, DIAL 3.
f707	a525 a74	IF FINISHED, DIAL STAR-POUND.
f708	a215 a216 a330 a331	IF FINISHED ADDING ENTRIES, DIAL POUND.
f709	a234	ENTER ALIAS FOR
f710	a331 a860	ENTER NEXT NAME AND POUND SIGN.
f711	a224 a225 a226 a228 a229 a917	ALIAS
f712	a224 a225 a226 a228 a917	DEFINED FOR
f713	a330	ENTER NEXT EXTENSION AND POUND SIGN.
f714	a587	DIRECTORY HAS NO ENTRIES.

Fragment Number	Announcements	Fragment Text
f715	a360 a361	CANNOT ADD NEW ENTRIES BECAUSE YOUR DIRECTORY IS FULL.
f716	a231 a232	ALIAS MUST BE TENOR FEWER NUMERALS.
f717	a233	ALIAS ALREADY DEFINED.
f718	a653	NAME ENTERED NOT FOLLOWED BY POUND AND NOT ADDED TO THE DIRECTORY.
f719	a652	EXTENSION ENTERED NOT FOLLOWED BY POUND AND NOT ADDED TO THE DIRECTORY.
f720	a651	ALIAS ENTERED NOT FOLLOWED BY POUND AND NOT ADDED TO THE DIRECTORY.
f721		DIRECTORY IS FULL.
f722	a188 a361	WAS NOT ADDED TO YOUR PERSONAL DIRECTORY.
f723	a136	YOU ARE ADMINISTERING YOUR PERSONAL DIRECTORY.
f724	a321	PERSONAL DIRECTORY REVIEW COMPLETED.
f725	a131 a132	YOU ARE ADDING ENTRIES TO YOUR PERSONAL DIRECTORY.
f726	a157	YOU ARE REVIEWING ALL ENTRIES IN YOUR PERSONAL DIRECTORY.
f727	a232 a327 a328 a329	ENTER ALIAS AND POUND SIGN.
f728	a189 a225	DELETED.
f729	a158	YOU ARE REVIEWING A SPECIFIC ENTRY IN YOUR PERSONAL DIRECTORY. TO DELETE THE CURRENT ENTRY, DIAL STAR-D. TO REVIEW ANOTHER ENTRY, ENTER THE ALIAS FOLLOWED BY THE POUND SIGN.
f730	a738	MESSAGE NOT DELIVERED BECAUSE THE BROADCAST MAILBOX WAS NOT DEFINED.
f731		TO RECORD MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2.

Fragment Number	Announcements	Fragment Text
f734		PRIVATE AND PRIORITY.
f735		BROADCAST AND PRIVATE.
f736	a167	YOU ARE RECORDING YOUR NAME. AS YOU USE AUDIX YOUR NAME WILL BE INCLUDED IN SYSTEM ANNOUNCEMENTS THAT YOU AND OTHER TDD USERS WILL SEE.
f737	a434	LOGIN ANNOUNCEMENT WILL BE INTERRUPTIBLE.
f738	a740	MESSAGE NOT DELIVERED DUE TO SENDING RESTRICTIONS.
f739	a342	MESSAGE SENT TO ALL LOCAL SUBSCRIBERS.
f740	a343	PRIVATE MESSAGE SENT TO ALL LOCAL SUBSCRIBERS.
f741	a344	PRIVATE, PRIORITY MESSAGE SENT TO
f742	a840	PRIVATE MESSAGE SENT TO
f743	a345	PRIORITY MESSAGE SENT TO
f744	a230	FOR ALL CALLS,
f745	a1 a230 a278 a339 a350 a351 a352 a353 a411 a412 a413 a414 a415 a416 a417 a418 a419 a420 a421 a422 a423 a424 a433 a579 a645	ACTIVE.
f747	a433	FOR INTERNAL CALLS,
f748	a339	FOR EXTERNAL CALLS,
f749	a278	FOR BUSY CALLS,
f750	a579	FOR NO-ANSWER CALLS,
f751	a645	FOR OUT-OF-HOURS CALLS,
f752	a425	TO PLAY BACK A SPECIFIC GREETING, DIAL ZERO. TO CREATE, CHANGE, OR DELETE A GREETING, DIAL 1. TO SCAN ALL YOUR GREETINGS, DIAL 2. TO ACTIVATE A GREETING, DIAL 3. TO ADMINISTER CALL TYPES, DIAL 4. IF FINISHED, DIAL POUND.
f753	a35 a36 a428	ENTER GREETING NUMBER.

Fragment Number	Announcements	Fragment Text
f754	a230 a278 a339 a350 a351 a352 a353 a365 a366 a367 a368 a369 a370 a371 a372 a373 a374 a375 a376 a377 a378 a379 a380 a381 a382 a383 a384 a385 a386 a387 a388 a389 a390 a391 a392 a393 a394 a395 a396 a397 a398 a399 a400 a401 a402 a403 a404 a405 a406 a407 a408 a409 a410 a411 a412 a413 a414 a415 a416 a417 a418 a419 a420 a421 a422 a423 a424 a433 a579 a645 a830 a88 a89 a91	GREETING
f755	a395	NOT RECORDED.
f756	a426 a427 a525 a74	TO SEE GREETING
f757	a1124 a429 a430	TORE-RECORD, DIAL 1.
	a429 a430 a525 a74	TO DELETE, DIAL STAR-D.
	a430	TO REVIEW STATUS, DIAL 2.
	a426 a427 a525 a74	DIAL ZERO.
	a303	DIAL 2.
f764	a787 a788 a828 a91	TO USE THIS GREETING FOR ALL CALLS, DIAL ZERO. FOR INTERNAL CALLS, DIAL 1. FOR EXTERNAL CALLS, DIAL 2.
	a396	RECORDED, BUT NOT ACTIVE.
f766	a783 a88	TO USE THIS GREETING FOR ALL CALLS, DIAL 1.
f767	a785 a786 a829 a89	TO USE THIS GREETING FOR ALL CALLS, DIAL ZERO. FOR BUSY CALLS, DIAL 1. FOR NO-ANSWER CALLS, DIAL 2.
f768	a394	APPROVED.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f769	a591	NOTHING TO APPROVE.
f770	a397 a398 a399 a400 a401 a402 a403 a404 a405 a406 a407 a408 a409 a410	RECORDED AND ACTIVE
f771	a365 a366 a367 a368 a369 a370 a371 a372 a373 a374 a375 a376 a377 a378	APPROVED AND ACTIVE
f772	a426	AGAIN
f773	a828 a829	TO ACTIVATE FOR OUT-OF-HOURS CALLS, DIAL 3.
f774	a143 a160 a161 a162 a163 a341	IF YOU HAVE ADDRESSED THIS MESSAGE AND WISH TO DELIVER IT IMMEDIATELY, DIAL STAR-STAR-POUND.
f775	a728	TO RECORD MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO ADMINISTER PERSONAL GREETINGS, DIAL 3.
f776	a1 a230 a278 a339 a350 a351 a352 a353 a433 a579 a645	THE SYSTEM GREETING
f777	a522	CANNOT PLAY BACK SYSTEM GREETING.
f778	a523	CANNOT MODIFY SYSTEM GREETING.
f779	a596	NO GREETINGS RECORDED.
f780	a524	PERSONAL GREETINGS REVIEW COMPLETED.
f781	a525 a74	TO SKIP TO THE NEXT GREETING, DIAL THE POUND SIGN.
f782	a789	TO ACTIVATE A GREETING, ENTER GREETING NUMBER. TO DEACTIVATE A GREETING, ACTIVATE A DIFFERENT GREETING IN ITS PLACE.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f783	a784	TO ACTIVATE ANOTHER GREETING, ENTER GREETING NUMBER. TO DEACTIVATE A GREETING, ACTIVATE A DIFFERENT GREETING IN ITS PLACE.
f784	a784 a789	TO ACTIVATE SYSTEM GREETING, DIAL ZERO.
f785	a23 a710 a711	SAME GREETING USED FOR ALL CALLS.
f786	a23 a711	TO IDENTIFY CALLS AS INTERNAL AND EXTERNAL, DIAL 1.
f787	a23 a711	TO IDENTIFY CALLS AS BUSY AND NO-ANSWER, DIAL 2.
f788	a22 a432 a657	TO IDENTIFY CALLS AS OUT-OF-HOURS, DIAL 3.
f789	a22 a657	OTHERWISE, DIAL 4.
f790	a244 a245	CALLS IDENTIFIED AS INTERNAL AND EXTERNAL.
f791	a242 a243	CALLS IDENTIFIED AS BUSY AND NO-ANSWER.
f792	a242 a244	CALLS IDENTIFIED AS OUT-OF-HOURS.
f793	a243 a245	CALLS NOT IDENTIFIED AS OUT-OF-HOURS.
f794	a300	TO CHANGE IDENTIFICATION TO BUSY AND NO-ANSWER, DIAL 2.
f795	a304	TO CHANGE IDENTIFICATION TO INTERNAL AND EXTERNAL, DIAL 1.
f796	a703	TO REMOVE OUT-OF-HOURS IDENTIFICATION, DIAL 4.
f797	a791	TO USE SAME GREETING FOR ALL CALLS, DIAL 5.
f798	a22 a656 a657	PRIME TIME IS
f799	a132 a216	ENTER LAST NAME
f800	a161 a162	YOU ARE SPECIFYING THE EXPIRATION DATE.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f801	a314	TO RESPOND TO THIS NOTIFICATION, DIAL 1. TO DELETE, DIAL STAR-D. TO SKIP, DIAL POUND.
f802	a707	CANNOT SEND A MESSAGE TO THE BROADCAST MAILBOX.
f804		NOT DEFINED.
f805	a352 a353	FOR INTERNAL
f806		FOR EXTERNAL
f807	a350 a351	FOR BUSY
f808		FOR NO-ANSWER
f809		INTERNAL
f810	a352 a353 a372 a375 a387 a390 a404 a407 a418 a421 a800 a803	EXTERNAL
f811		BUSY
f812	a350 a351 a366 a369 a381 a384 a398 a401 a412 a415 a794 a797	NO-ANSWER
f813	a351 a353 a367 a369 a370 a373 a375 a376 a382 a384 a385 a388 a390 a391 a399 a401 a402 a405 a407 a408 a413 a415 a416 a419 a421 a422 a795 a797 a798 a801 a803 a804	AND OUT-OF-HOURS

Fragment Number	Announcements	Fragment Text
f814	a350 a351 a352 a353 a366 a367 a368 a369 a370 a371 a372 a373 a374 a375 a376 a377 a378 a381 a382 a383 a384 a385 a386 a387 a388 a389 a390 a391 a392 a393 a398 a399 a400 a401 a402 a403 a404 a405 a406 a407 a408 a409 a410 a412 a413 a414 a415 a416 a417 a418 a419 a420 a421 a422 a423 a424 a794 a795 a796 a797 a798 a799 a800 a801 a802 a803 a804 a805 a806	CALLS.
f815	a46	YOU ARE ADMINISTERING YOUR PERSONAL GREETINGS.
f816	a35	YOU ARE PLAYING BACK A PERSONAL GREETING.
f817	a36	YOU ARE RECORDING A PERSONAL GREETING.
f818	a830 a88 a89 a91	YOU HAVE JUST RECORDED
f819	a74	YOU ARE SCANNING YOUR PERSONAL GREETINGS.
f820	a37	YOU ARE SELECTING WHICH GREETING TO ACTIVATE.
f821	a21 a22 a23	YOU ARE ADMINISTERING CALL TYPES.
f822	a174	AS YOU USE AUDIX YOUR NAME WILL BE INCLUDED IN SYSTEM ANNOUNCEMENTS THAT YOU AND OTHER TDD USERS WILL SEE. WAIT FOR THE "GA" PROMPT, THEN TYPE YOUR NAME. AFTER TYPING YOUR NAME, DIAL 1.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f823	a1 a365 a380 a397 a411 a793	FOR ALL CALLS
f825	a372 a373 a374 a375 a387 a388 a389 a390 a404 a405 a406 a407 a418 a419 a420 a421 a800 a801 a802 a803	FOR INTERNAL
f826	a370 a371 a385 a386 a402 a403 a416 a417 a798 a799	FOR EXTERNAL
f827	a366 a367 a368 a369 a381 a382 a383 a384 a398 a399 a400 a401 a412 a413 a414 a415 a794 a795 a796 a797	FOR BUSY
f828	a376 a377 a391 a392 a408 a409 a422 a423 a804 a805	FOR NO-ANSWER
f829	a378 a393 a410 a424 a806	FOR OUT-OF-HOURS
f830	a560	YOU MUST APPROVE YOUR RECORDING.
f831	a161 a162	TO EXIT THE EXPIRATION DATE OPTIONS, DIAL STAR-POUND.
f832	a131 a215 a859	PLEASE ENTER EXTENSION AND POUND SIGN.
f833	a131 a132 a327 a328 a895	17) DELETE CURRENT ENTRY, DIAL STAR-D.
f835	a618 a630 a631	FOR ALL NEW MESSAGES
f836	a619 a632 a633	ONLY FOR NEW PRIORITY MESSAGES

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f837	a634	TO TURN ON OUTCALLING FOR ALL NEW MESSAGES, DIAL 1. TO TURN ON OUTCALLING ONLY FOR NEW PRIORITY MESSAGES, DIAL 2.
f838	a153	YOU ARE SELECTING WHICH MESSAGES WILL RECEIVE OUTCALLS.
f839	a74	TO REWIND TO THE PREVIOUS GREETING, DIAL 2.
f840	a636	OPTION
f841	a337 a636	NOT DEFINED
f842	a565	ANNOUNCEMENT NOT RECORDED. TRY AGAIN LATER
f843	a254 a837	TO SCAN HEADERS AND MESSAGES, DIAL 1. TO SCAN HEADERS ONLY, DIAL 2. TO SCAN MESSAGES ONLY, DIAL 3.
f844	a529	END OF MESSAGE.
f845	a558	NEXT MESSAGE.
f846	a837	YOU ARE SELECTING AN OPTION FOR AUTOMATIC MESSAGE SCAN.
f847	a118 a927	YOU ARE AUTOMATICALLY SCANNING YOUR INCOMING MESSAGES. TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RESPOND TO OR FORWARD THE MESSAGE, DIAL 1.
f848	a122 a925	YOU ARE AUTOMATICALLY SCANNING YOUR INCOMING MESSAGES. TO PLAY BACK THE MESSAGE, DIAL ZERO. TO RESPOND TO THE MESSAGE, DIAL 1.
f849	a118 a122	TO SKIP TO THE NEXT MESSAGE, DIAL THE POUND SIGN. TO PLAY BACK THE HEADER, REWIND BY DIALING 2, THEN PLAY BY DIALING 3. TO SKIP TO THE NEXT CATEGORY, DIAL STAR-POUND.
f850	a563	BROADCAST AND LOGIN MESSAGE SERVICES ARE NOT AVAILABLE.
f851	a527 a925 a927	TO SKIP, DIAL POUND.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f852	a157	TO REWIND TO THE CURRENT ENTRY, DIAL 2. TO REWIND TO PREVIOUS ENTRIES, DIAL 2 AS MANY TIMES AS NECESSARY.
f853	a962	MESSAGES SKIPPED, RETAINED AS NEW.
f854	a882	SECONDS TO FINISH RECORDING.
f855	a894 a895	REMOTE AMIS MAILBOX ID
f856	a892 a893	THIS ISA RECORDED MESSAGE FROM
f857		FROM
f858	a907	TO REPLAY, DIAL ZERO.
f859	a909	MAILBOX ID NOT FOLLOWED BY POUND.
f860	a910	MAILBOX ID NOT VALID.
f861	a884 a885 a886 a915 a931	AMIS
f862	a896	IT COULD NOT BE DELIVERED BECAUSE THE RECIPIENT APPEARS TO BE A WRONG NUMBER.
f863	a897	IT' COULD NOT BE DELIVERED AFTER MULTIPLE ATTEMPTS TO DELIVER THE MESSAGE.
f864	a898	AUTOMATED CALL, PLEASE DIAL 1 TO DISCONNECT.
f865	a899	YOUR NUMBER WAS DIALED BY MISTAKE. WE ARE SORRY FOR THIS INCONVENIENCE. TO PREVENT THIS FROM RECURRING, THIS CALL HAS BEEN REPORTED AS A MISDIALED CALL.
f866	a911	AMIS CASUAL SUBSCRIBERS CANNOT BE ADDED TO YOUR LIST.
f867	a895	YOU ARE ENTERING THE
f868	a895 a912	MAILBOX ID MUST BE LESS THAN OR EQUAL TO 16 DIGITS.
f869	a912	IF THE EXTENSION ENTERED BELONGS TO A CASUAL AMIS SUBSCRIBER, YOU WILL BE PROMPTED FOR A MAILBOX ID.

Fragment Number	Announcements	Fragment Text
f900	a855	STANDARD U.S. TDD
f901	a856	ANNOUNCEMENT SET DOES NOT EXIST
f902	a857	ANNOUNCEMENT SET
f903		
f904		
f905		
f906	a858	
f907		
f908		
f909	a858	ANNOUNCEMENT
f910	a305 a306 a859 a860 a861 a863 a92	YOU ARE ATTEMPTING TO PLAY AN ANNOUNCEMENT THAT NEEDS ADDITIONAL INPUT BEFORE IT CAN BE PLAYED.
f911	a301 a305	ENTER BUTTONS FOLLOWED BY POUND.
f912	a302 a306	ENTER NUMBER FOLLOWED BY POUND.
f913	a1137 a131 a132 a136 a319 a327 a328 a329 a35 a36 a429 a430 a783 a784 a786 a788 a789 a791 a828 a829 a88	IF FINISHED, DIAL POUND.
f914	a864	NOT FILED.
f915	a865	NO OPTIONS MENU AVAILABLE.
f916	a154	TO SEND MESSAGE, DIAL POUND, OR ENTER A DELIVERY OPTION. TO SEE A LIST OF OPTIONS, DIAL ZERO.
f917	a277	TO SCHEDULE DELIVERY, DIAL 3.
f918	a667	TO RE-SCHEDULE DELIVERY, DIAL 3.
f919	a672	TO FILE A COPY, DIAL 4.
f920	a748	TO NOT FILE A COPY, DIAL 4.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f921	a868	TO MAKE PRIVATE, DIAL 1. TO SEND, DIAL POUND.
f922	a869	TO ACCESS THE DELIVERY OPTIONS MENU, DIAL POUND AFTER RECORDING YOUR MESSAGE.
f923	a870	DIAL POUND TO APPROVE YOUR MESSAGE AND ACCESS THE DELIVERY OPTIONS MENU.
f924	a873 a972	SECONDS
f925	a873	MINUTES
f926	a871	XXXERRORXXX
f927		YOU HAVE NEW
f928	a556	NEW MESSAGES
f929	a635	OLD MESSAGES
f930	a207	ACCESSED MESSAGES
f931	a313	DELIVERED MESSAGES
f932	a347	FILED MESSAGES
f933	a776	UNDELIVERABLE MESSAGES
f934	a777	UNDELIVERED MESSAGES
f935	a780	UNOPENED MESSAGES
f936	a2	PARTIAL ENTRY DELETED.
f937	a872	SORRY YOU ARE HAVING DIFFICULTY. PLEASE GET HELP AND TRY AGAIN LATER.
f938	a905	FIRST
f939		SECOND
f940		THIRD
f941		FOURTH
f942		FIFTH
f943		SIXTH

Fragment Number	Announcements	Fragment Text
f944		SEVENTH
f945		EIGHTH
f946		NINTH
f947		TENTH
f948		ELEVENTH
f949		TWELFTH
f950		THIRTEENTH
f951		FOURTEENTH
f952		FIFTEENTH
f953		SIXTEENTH
f954		SEVENTEENTH
f955		EIGHTEENTH
f956		NINETEENTH
f957		TWENTIETH
f958		TWENTY-FIRST
f959		TWENTY-SECOND
f960		TWENTY-THIRD
f961		TWENTY-FOURTH
f962		TWENTY-FIFTH
f963		TWENTY-SIXTH
f964		TWENTY-SEVENTH
f965		TWENTY-EIGHTH
f966		TWENTY-NINTH
f967		THIRTIETH
f968		THIRTY-FIRST
f969	a867	YOU ARE CHOOSING BETWEEN ANNOUNCEMENT SETS WHOSE NAMES MATCH YOUR ENTRY. TO INDICATE NO ANNOUNCEMENT SETS MATCH, DELETE ENTRY BY DIALING STAR-D.
f970	a476	TO CONTINUE REVIEWING, DIAL 3. TO DELETE AN ENTRY, DIAL STAR-D. IF FINISHED REVIEWING, DIAL FOUND.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f971	a340 a341 a919	TO SEND, DIAL POUND.
f972	a921 a956	TO REACH THE COVERING EXTENSION, DIAL ZERO.
f973	a285 a920 a921 a955 a956	IF YOU ARE FINISHED, PLEASE HANG UP.
f974	a922	NOT BROADCAST.
f975	a923	NOT LOGIN ANNOUNCEMENT.
f976		NAME
f977	a752	NAME NOT FOUND.
f978	a886	UNKNOWN
f979	a878 a880	AFTER RECORDING, DIAL 1 AGAIN.
f980	a878 a880	TO RECORD FROM HERE, DIAL 1.
f981	a974	MESSAGE NOT DELIVERED BECAUSE IT WAS LONGER THAN THE EIGHT-MINUTE AMIS MESSAGE LIMIT.
f983	a127 a76	TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO RECORD OR CHANGE THE TDD GREETING SEEN BY CALLERS, DIAL 3.
f984	a114 a120 a77	TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2.113 ADMINISTER ATTENDANT MENU, DIAL 3.
f985	a119 a125 a129	TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2.
f986	a115 a121 a159	TO RECORD AND SEND TDD MAIL MESSAGES, DIAL 1. TO GET MESSAGES, DIAL 2. TO RECORD OR CHANGE THE TDD GREETINGS SEEN BY CALLERS, DIAL 3.
f987	a171 a172 a936 a937	ENTER LAST NAME OF THE PERSON
f1007	a812	TO PLAY BACK, DIAL 2-3.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f1305	a1112	PLEASE ENTER AN OUTCALLING OPTION. TO SEE A LIST OF OPTIONS, DIAL ZERO.
f1400	a1127	FOR ENGLISH DIAL STAR-1.
f1401	a1128	YOUR PRIMARY GREETING IS IN
f1402	a1123 a1124	TO ADMINISTER YOUR PRIMARY GREETING, DIAL POUND.
f1403	a1130	YOUR SECONDARY GREETING IS IN
f1404	a1121	TO ADMINISTER THIS GREETING, DIAL 1.
f1405	a1123 a1124	TO PLAY BACK YOUR SECONDARY GREETING, DIAL ZERO.
f1406	a1123 a1124	TO PLAY BACK YOUR PRIMARY GREETING, DIAL ZERO.
f1407	a1123	TO RECORD YOUR PRIMARY GREETING, DIAL 1.
f1408	a1122	TO ADMINISTER THIS GREETING, DIAL 2.
f1409	a1123	TO RECORD YOUR SECONDARY GREETING, DIAL 1.
f1410	a1123 a1124	TO ADMINISTER YOUR SECONDARY GREETING, DIAL POUND.
f1411	a1124	TO DELETE YOUR PRIMARY GREETING, AND USE THE SYSTEM GREETING DIAL STAR-D.
f1412	a1124	TO DELETE YOUR SECONDARY GREETING, AND USE THE SYSTEM GREETING, DIAL STAR-D.
f1413	a1125	YOUR NEW PRIMARY GREETING IS NOW ACTIVE.
f1414	al 125	YOUR NEW SECONDARY GREETING IS NOW ACTIVE.
f1415	a1126	RECORDING DELETED.
f1416	a1126	YOUR PRIMARY GREETING HAS NOT CHANGED.

<b>Fragment Number</b>	<b>Announcements</b>	<b>Fragment Text</b>
f1417	a1126	YOUR SECONDARY GREETING HAS NOT CHANGED.
f1418	a1133	YOU ARE ADMINISTERING YOUR PRIMARY GREETING.
f1419	a1133	YOU ARE ADMINISTERING YOUR SECONDARY GREETING.
f1420	a1132	CALLERS WILL BE GREETED AND WILL RECEIVE INSTRUCTIONS IN THE PRIMARY LANGUAGE UNLESS THEY DIAL STAR-1, IN WHICH CASE THEY WILL BE GREETED AND RECEIVE INSTRUCTIONS IN THE SECONDARY LANGUAGE.
f1430	a1134	THE FOLLOWING MESSAGE WAS RESTORED
f1431	a1135	NO MESSAGE TO RESTORE.
f1432	a1136	TO UNDELETE LAST DELETED MESSAGE, DIAL STAR-STAR-U.
f1433	a1138	THE RETURN ADDRESS FOR THIS MESSAGE IS NOT A VALID EXTENSION.
f1434	a1139 a1140 a1141 a123 a126 a128 a168 a169 a170 a62 a85	TO RETURN TO GETTING MESSAGES, DIAL POUND.
f1435	a1142	GA
f1436	a1143	ENGLISH

# Index

---

---

## A

add  
    fragment to announcement 2-4  
Administration  
administration  
    add fragment to an announcement 2-4  
    Customizing system announcements 1-1  
Administrative announcements 1-3  
Administrator  
    Prerequisite skills *vii*  
Announcement Sets  
Announcement sets 1-3  
    creating 2-1  
Announcements  
    Administrative 1-3  
    Eliminating fragments from announcements 2-3  
    Fragments 1-1  
    Sets 1-3  
    System 1-3  
    u. s. English 1-3  
    U.S. English Terse 1-3  
    us-eng 1-1

## C

Call answer  
    changing default greetings 2-2  
changing  
    Default Call Answer Greetings 2-2  
creating  
    Announcement Sets 2-1  
Customizing system announcements 1-1

## D

Defaults  
    Call Answer Greetings 2-2  
Deleting  
    Fragments from announcements 2-3

## F

filesystem  
    add fragment to an announcement 2-4  
Filesystems  
    Customizing announcements 1-1  
Fragments  
fragments  
    add to an announcement 2-4  
    Defined 1-1  
    Eliminating from announcements 2-3  
    Re-recording 2-2

## G

Greetings  
    Default Call Answer 2-2

## P

Prerequisites  
    Administration skills *vii*

## R

Related resources *ix*  
Re-Recording  
    Fragments 2-2

## S

System  
System announcements 1-3  
    customizing greetings 1-1

## U

U.S. English  
    Announcement fragments 1-3  
U.S. English Terse  
    Announcement fragments 1-3  
Useng

Useng--- *Contd*

Announcement fragments *1-1*