




Dyson Ball Animal Power Cord Replacement

This is a step by step guide for the replacement of a broken power cord on the Dyson Ball Animal.

Written By: Jonathan Gong-Guy

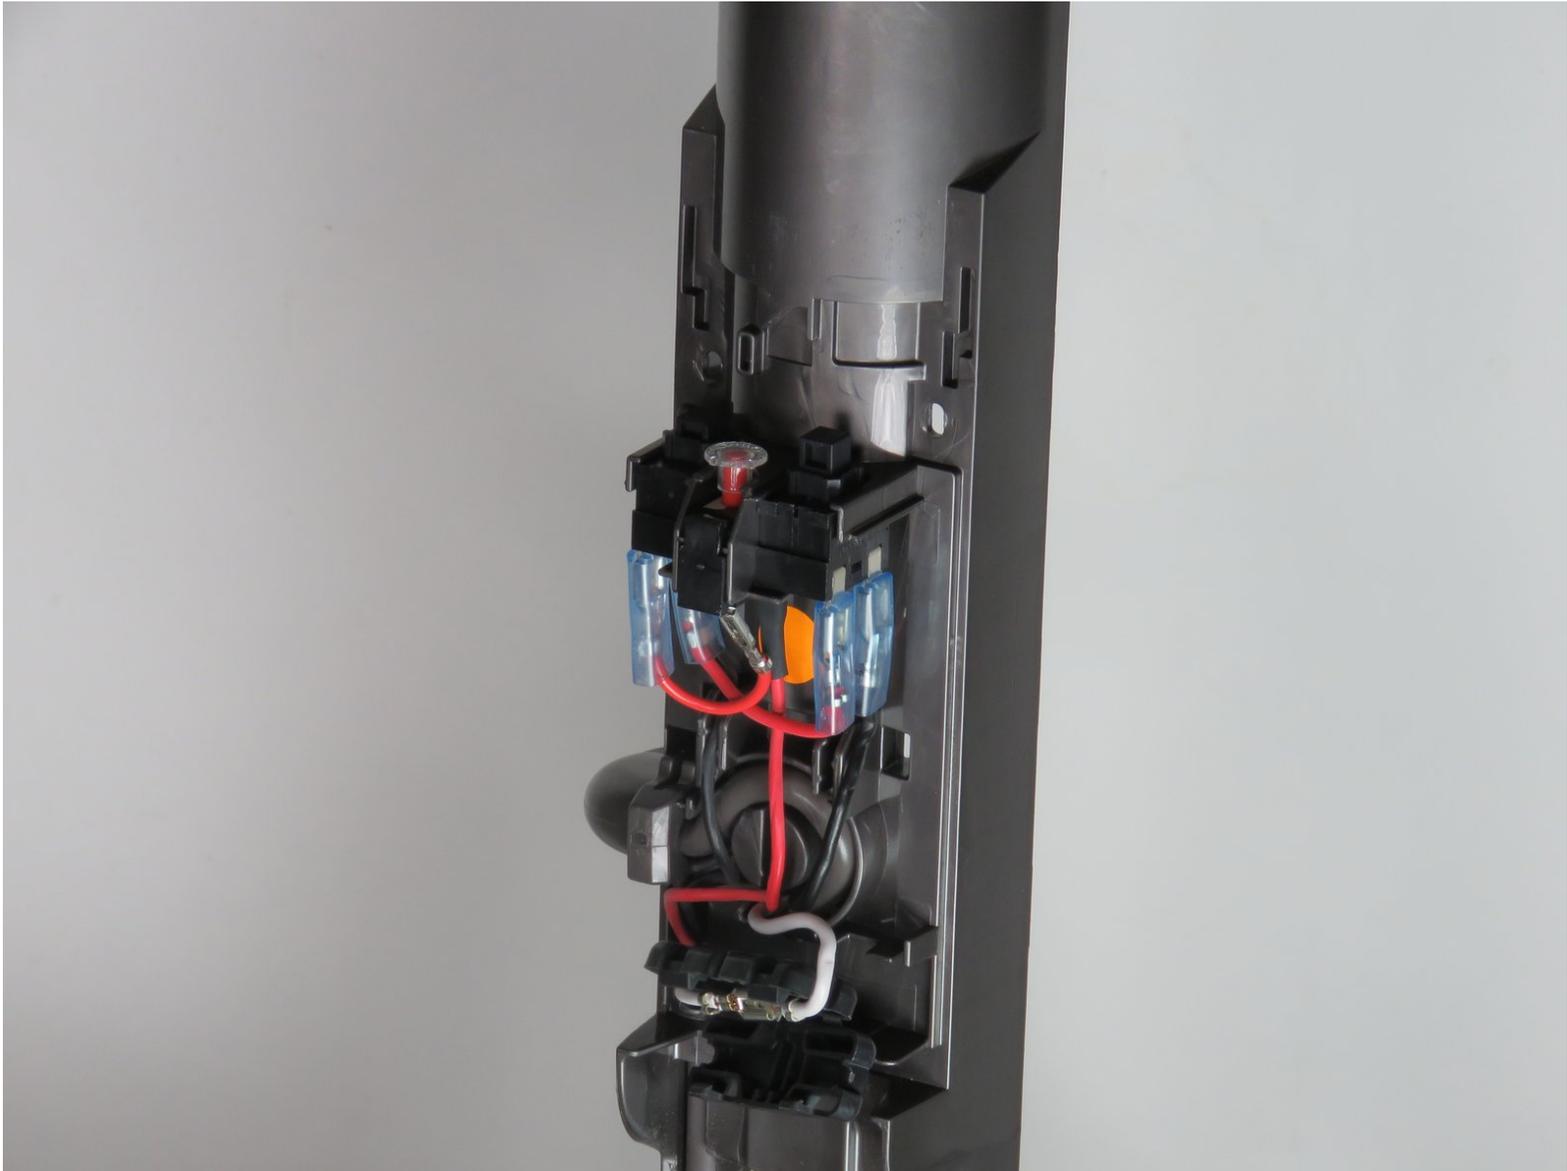

INTRODUCTION

In this guide you will be able to remove the cover on the power cord and remove and reattach the power cord for the Dyson Ball Animal.

TOOLS:

- [T15 Torx Screwdriver](#) (1)
-

Step 1 — Power Cord



- Turn off and unplug the vacuum.
- Remove the vacuum canister from the front of the vacuum.

Step 2




- Flip the vacuum around and remove the hose so it is not blocking the back of the vacuum.

Step 3



- There are four 15mm screws that must be removed with a Torx T15 screwdriver.

Step 4

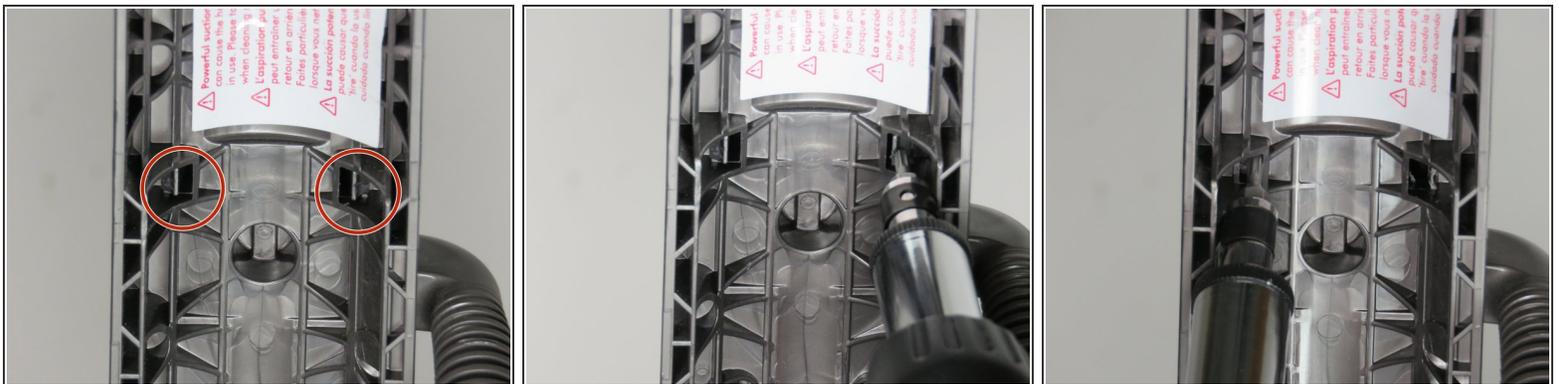

- After all the screws are released there are two tabs that must be pressed in and towards the center.

i The tabs can be pressed in one at a time but may require some force.

Step 5



- After removing the two tabs gently pull the face off the power supply.

Step 6



- Follow the black cord from the power cord.
 - Pinch the plastic piece.
 - Remove from the metal tongue.
- ⚠** When removing the cords, grab them from the plastic parts and not the cord.

Step 7



- There is also a black case that needs to be opened in order to remove the power cord.
 - After opening the case pull apart the wire and attach the new wire.
- ⚠ Again, make sure that you are pulling from the heads of the wires and not the wires themselves.

To reassemble your device, follow these instructions in reverse order.