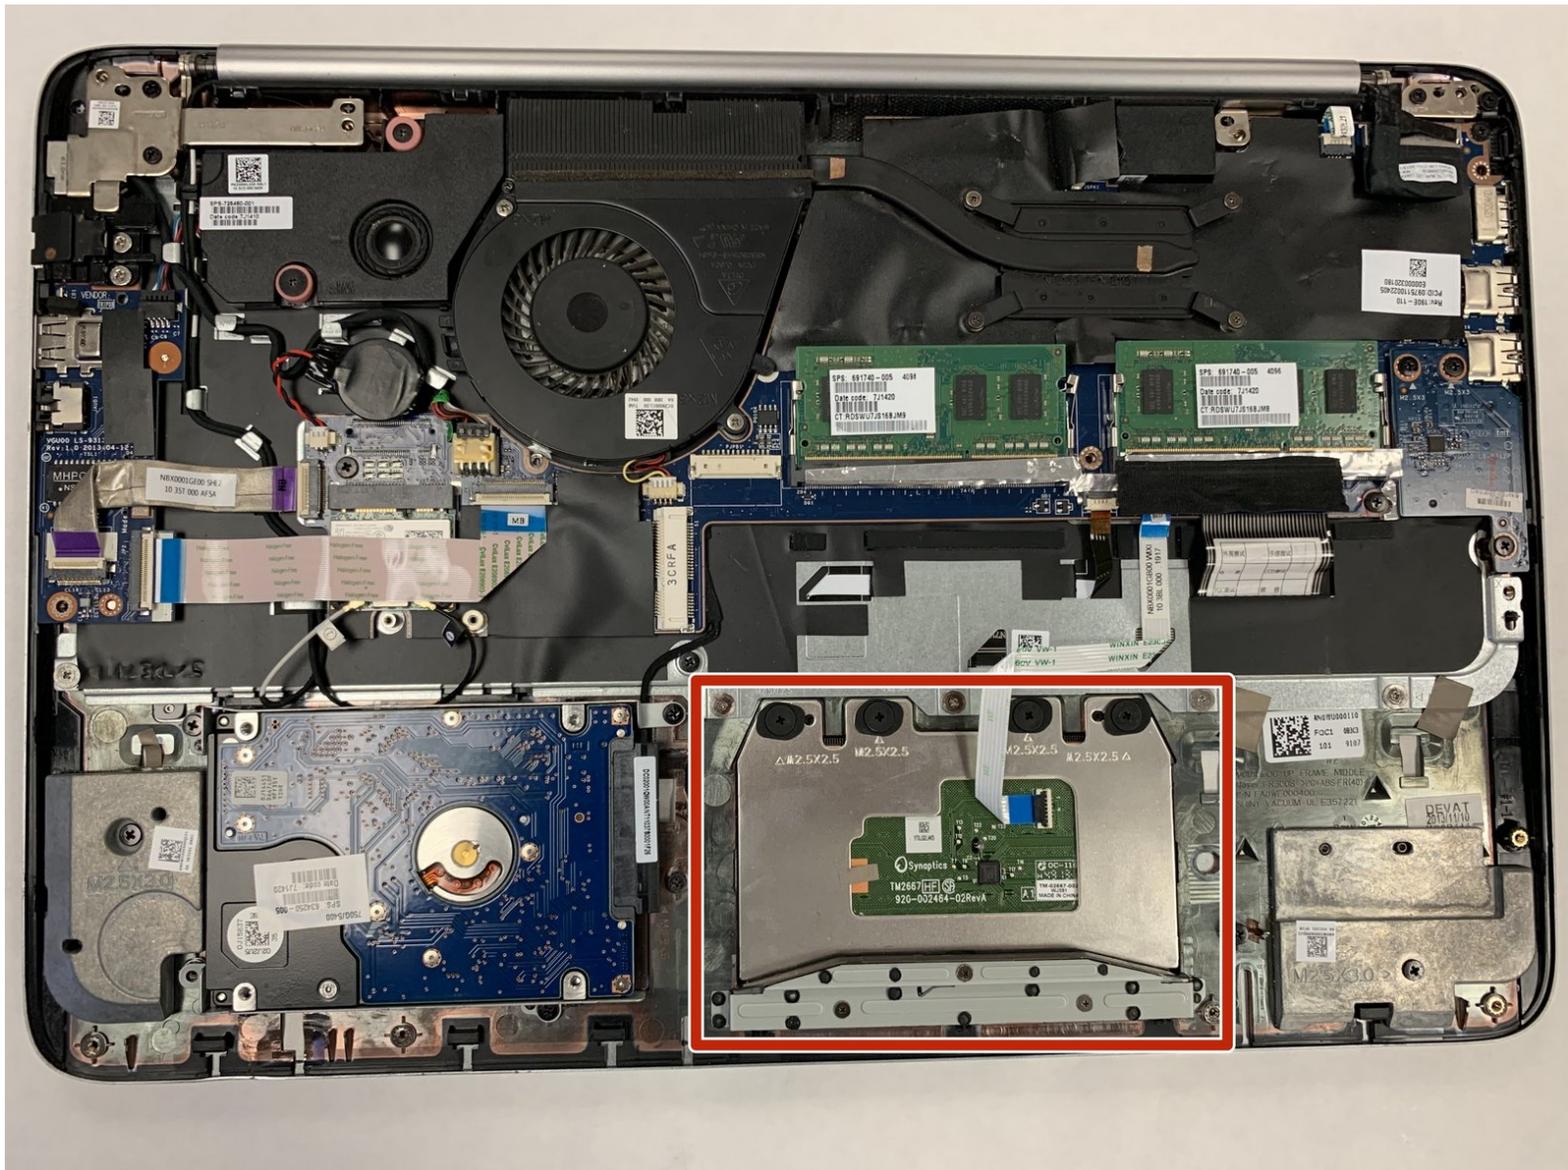# HP Envy Touchsmart m6-k125dx Mouse Touch Pad Replacement

If your mouse touch pad has stopped working completely, it may be time to replace it. This is a repair guide on how to replace the mouse touch pad.

Written By: Aaron Burns

INTRODUCTION

This is a repair guide on how to get to and replace the mouse touch pad.

TOOLS:
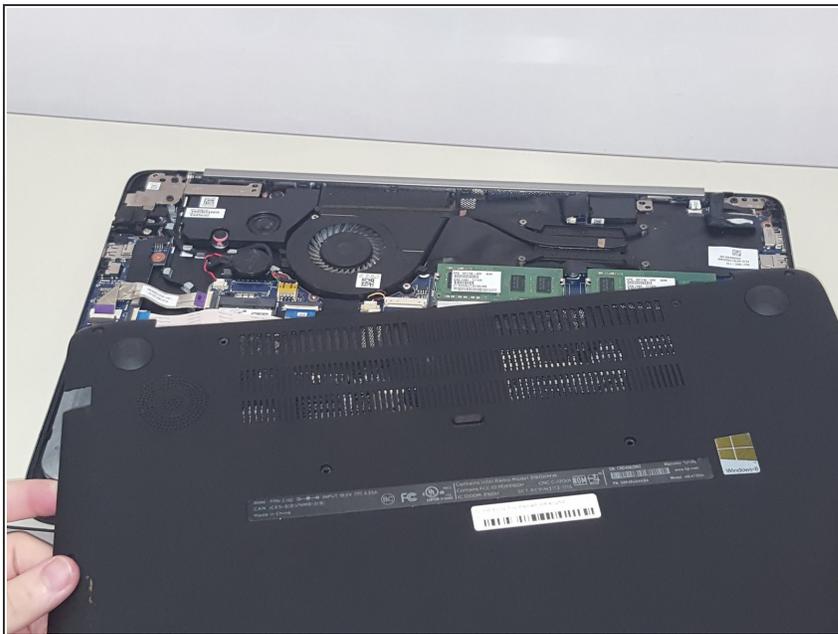
- JIS #0 Screwdriver (1)

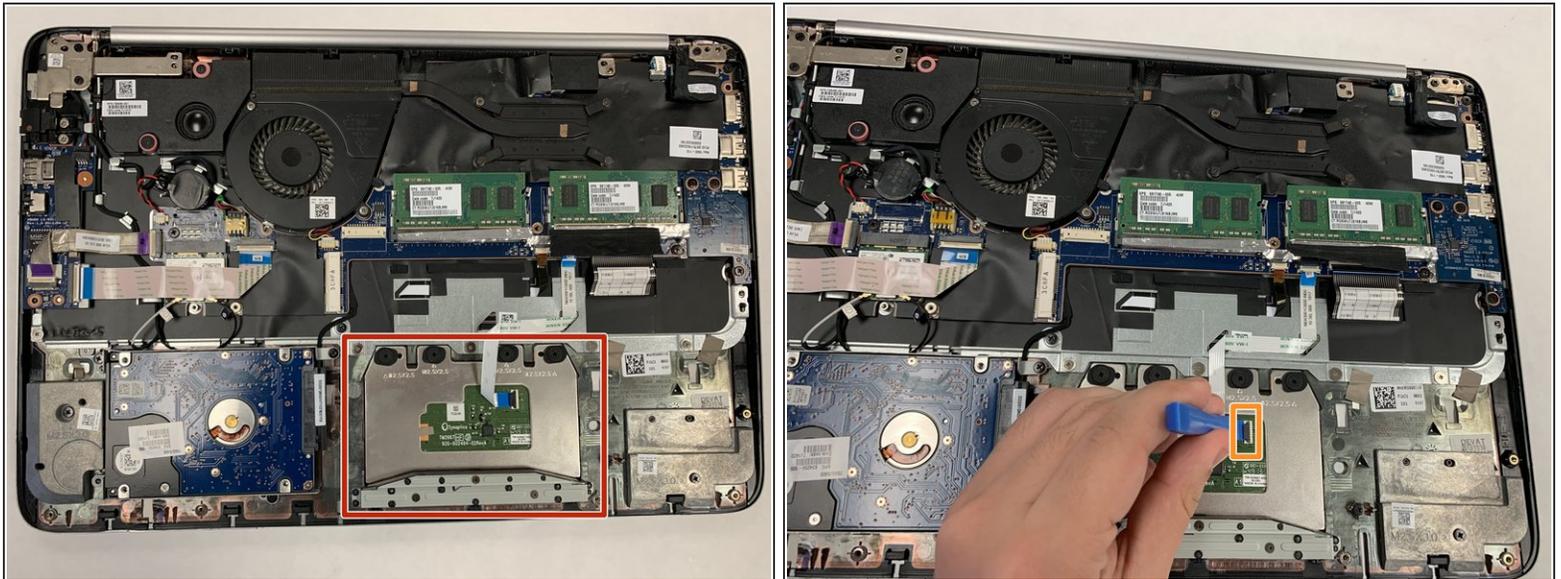## Step 1 — Back Panel

- Turn the laptop over so that the bottom is facing up

- Using the J0 screwdriver, unscrew all 12 M2.5x5.5 screws from the back panel.
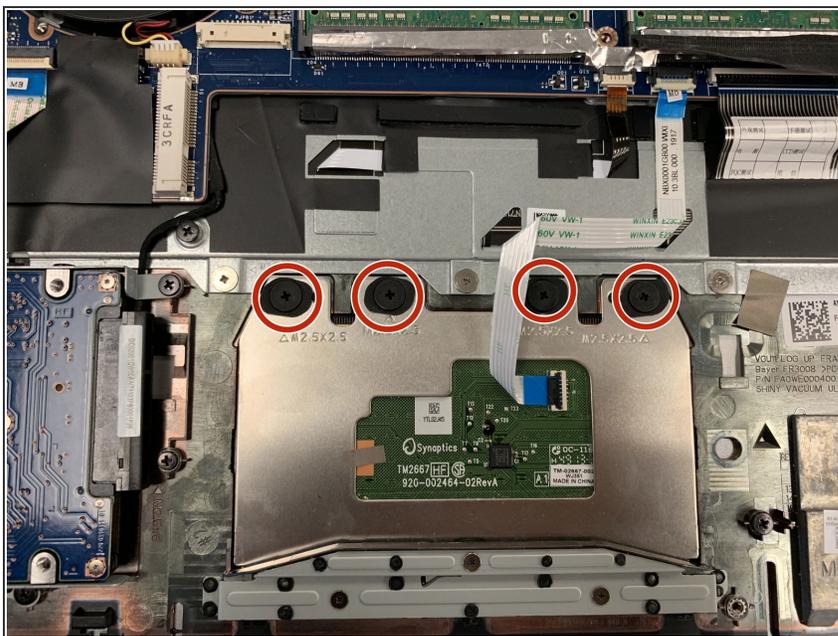
Step 2

- Carefully remove the back panel to reveal the inner components.

This document was generated on 2020-02-18 12:27:57 AM (MST).

© iFixit — CC BY-NC-SA   www.iFixit.com   Page 3 of 5

Step 3 — Mouse Touch Pad

- The mouse touch pad is located in the bottom middle section of the back of the laptop.

- Lift the black ZIF tab and gently pull the ribbon cable free.

Step 4

- There are four M2.5X2.5 screws that need to be removed in order to take the mouse touch pad out.

- Unscrew all four M2.5X2.5 screws with a JIS #0 screwdriver.

This document was generated on 2020-02-18 12:27:57 AM (MST).

Step 5

- Flip the laptop over and open it.

- Gently press on the two top corners of the mouse touch pad, snapping it down and out.

- Remove through the bottom of the laptop and replace.

To reassemble your device, follow these instructions in reverse order.