




TaoTronics TT-SK06 Front Grate and Metal Casing Replacement

This guide will help you to remove the casing and front grate of the device so that you can get to the internal components of the device.

Written By: Niko Fabian

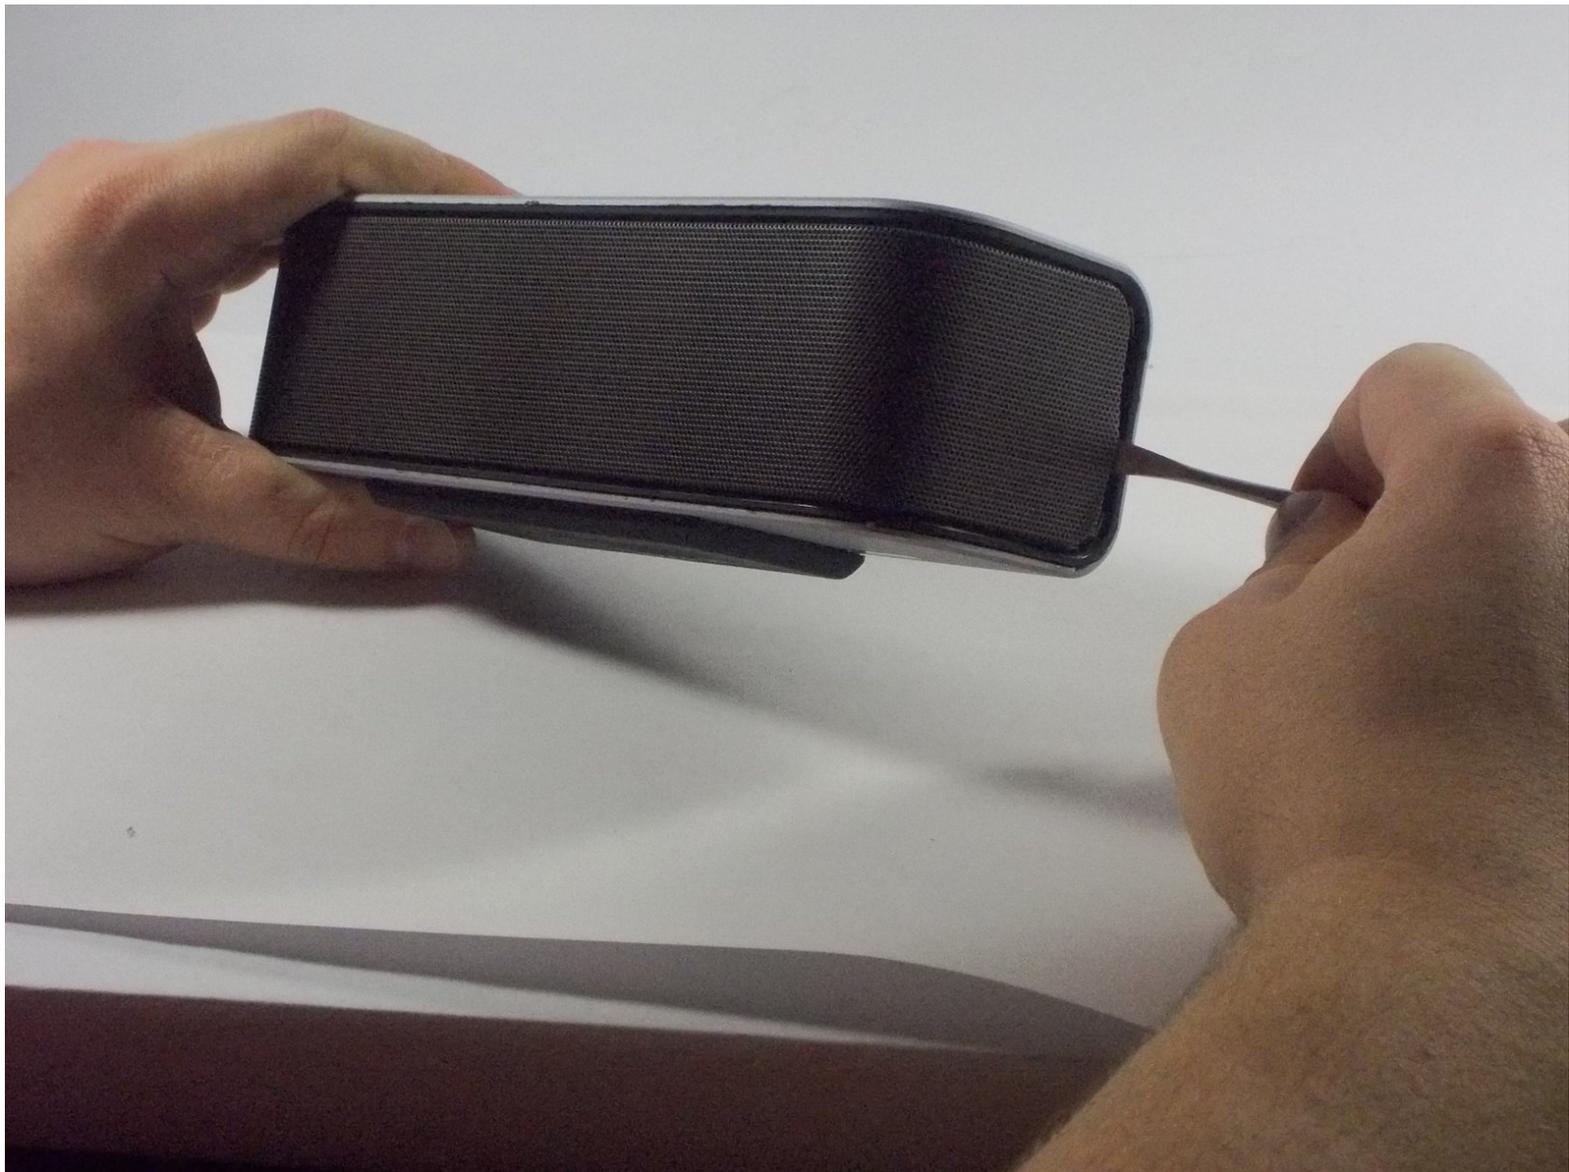


INTRODUCTION

This guide is a prerequisite guide to help you in removing the speaker grate on the front of the device, and the metal casing that surrounds the device. You need to do this step in order to reach the internal components of the device.

TOOLS:

- [Metal Spudger Set](#) (1)


Step 1 — Front Grate

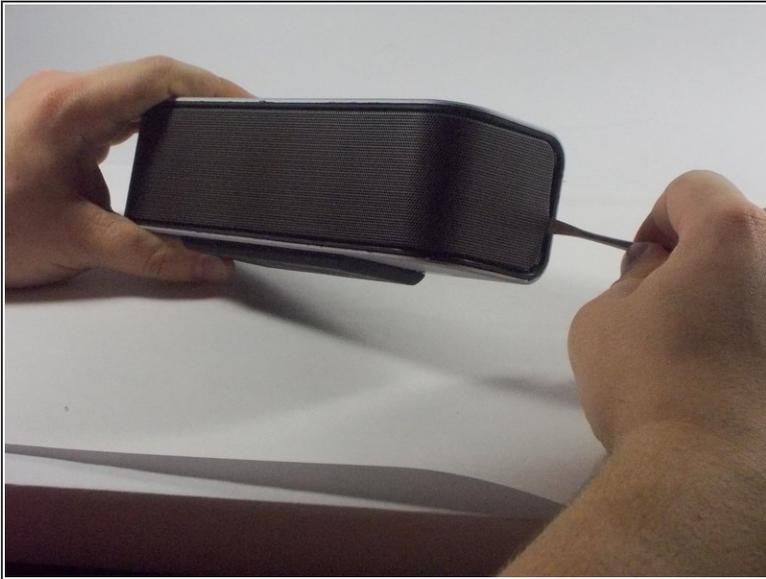

- To remove the front grate of the speaker grab a metal spudger and go to the back corner of the device where the front panel curves around the device. Insert the spudger and pry apart the corner until clips release from panel. Repeat for the other side of the grate. When all clips are released pull grate off from the front of device

 When working with electronics, it's important to choose a tool that's ESD-safe to avoid accidental damage to the device. The metal spudger is great when you need serious prying power, but the regular black nylon spudger or a plastic opening tool should be used whenever possible.

Step 2

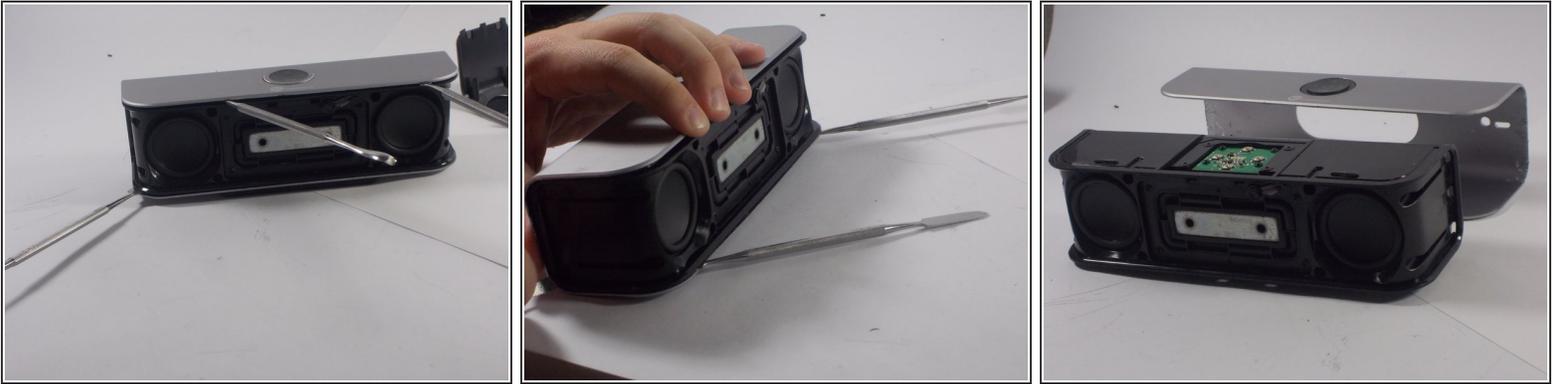

- Grab two metal spudgers and insert one into the slit underneath the silver plating on the top of the device. Pry upward with the spudger until you unhook the two locks on the top. Repeat same step for the bottom of the device. When all four tabs are released, slide device out of the casing

 Use caution when working with the metal spudger, as it can potentially damage your device.

To reassemble your device, follow these instructions in reverse order.