



HP Beats Special Edition 15-p390nr Motherboard Replacement

This is a prerequisite guide to disassembling the motherboard.

Written By: Michelle



INTRODUCTION

If you find yourself needing to replace the motherboard for your HP Beats Special Edition 15-p390nr, this guide will help you do so.

TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [Metal Spudger](#) (1)
-

Step 1 — Keyboard



 Turn computer off before starting.


- Turn computer over and begin removing noticeable 8mm screws with a Phillips #0 screwdriver.

Step 2




- ⓘ Some screws may be hidden under a screw cover.
- Simply use a metal spudger to pop off the screw cover to unveil the hidden 8mm screw.
- ⓘ Screw cover may fly when removing.

Step 3

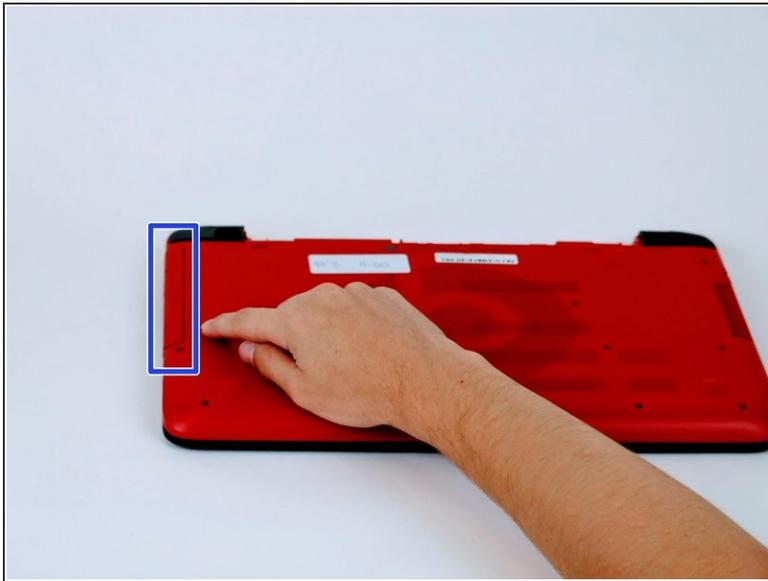

- Once screws are removed you may now remove the optical drive.
- Remove the hidden 3mm screw in the optical drive port.


Step 4

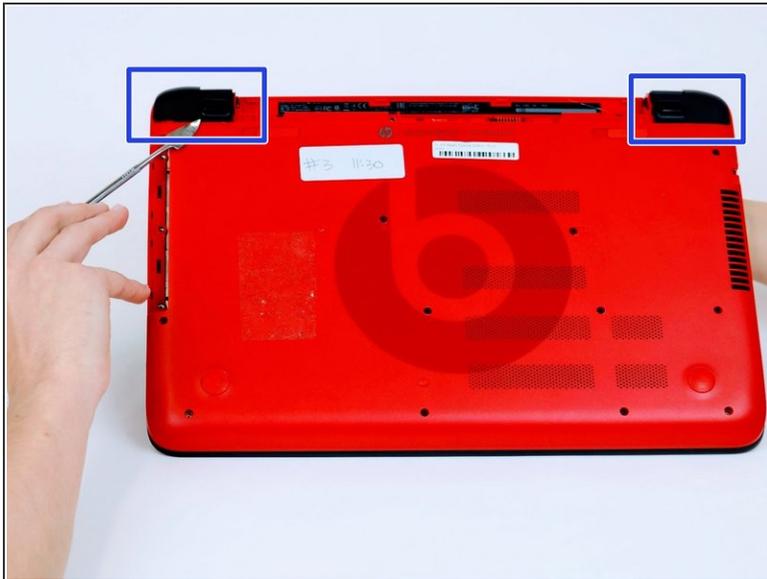

- Remove the rubberized feet located on the left and right shoulder of the computer to uncover hidden 8mm screws.

i Popping noises are normal

Step 5

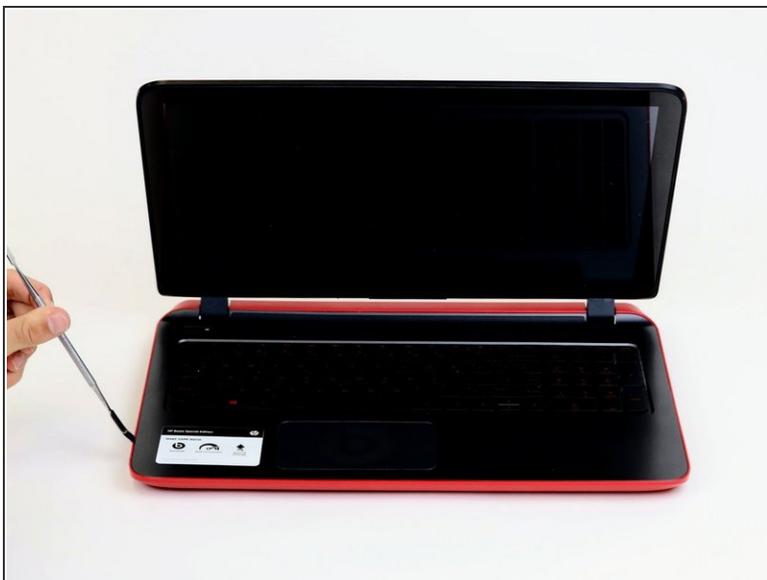

- Flip computer over and wedge metal spudger along the computer to pop off keyboard panel

Step 6



- Unclip wires connected to the motherboard and remove keyboard from the device.

i 17 screws should be removed up to this point.

Step 7 — Motherboard



- Remove screws from the motherboard.


i 11 screws should be removed from the motherboard

Step 8




- Unclamp wire strips from motherboard.

Step 9

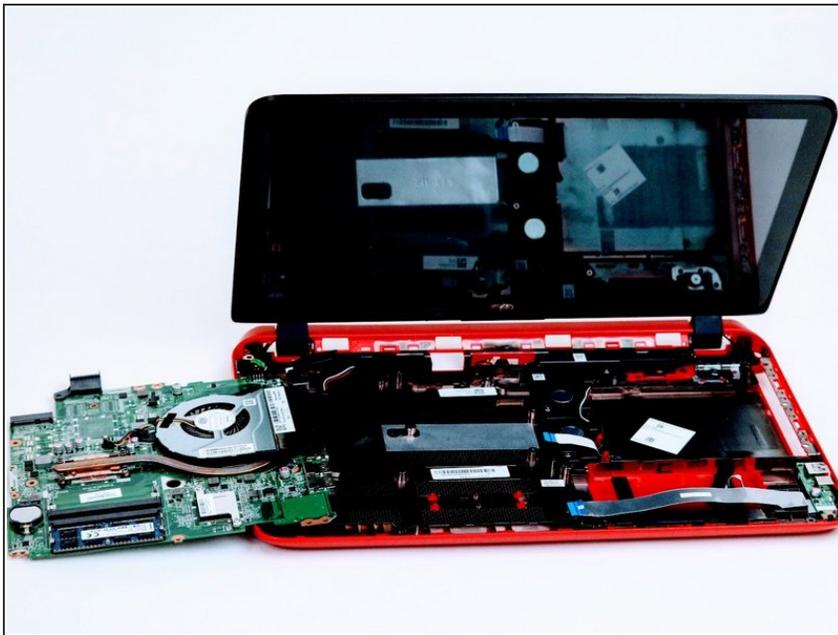

- Detach by lifting the motherboard up and flip the motherboard over.

Step 10

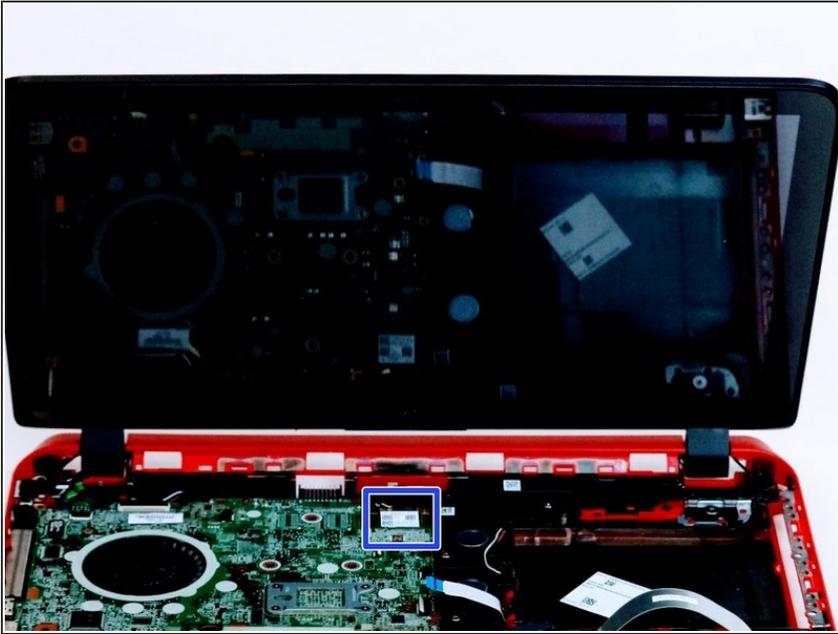

- Unclip wifi card for further procedures

To reassemble your device, follow these instructions in reverse order.