



# Samsung Galaxy Tab 3 Kids Aux Port Replacement

This replacement guide will walk you through how to replace the Aux Port on the Samsung Galaxy Tab 3 Kids.

Written By: ajhoffman



 **TOOLS:**

- [iFixit Opening Tools](#) (1)
  - [Phillips #000 Screwdriver](#) (1)
-

## Step 1 — Aux Port




- Using the plastic opening tool to open up the device, wedge in the seam between the screen and the back cover. Slide the tool around all the edges and remove the screen from the back cover

## Step 2



- Unplug the battery connection carefully using the plastic opening tool.

### Step 3

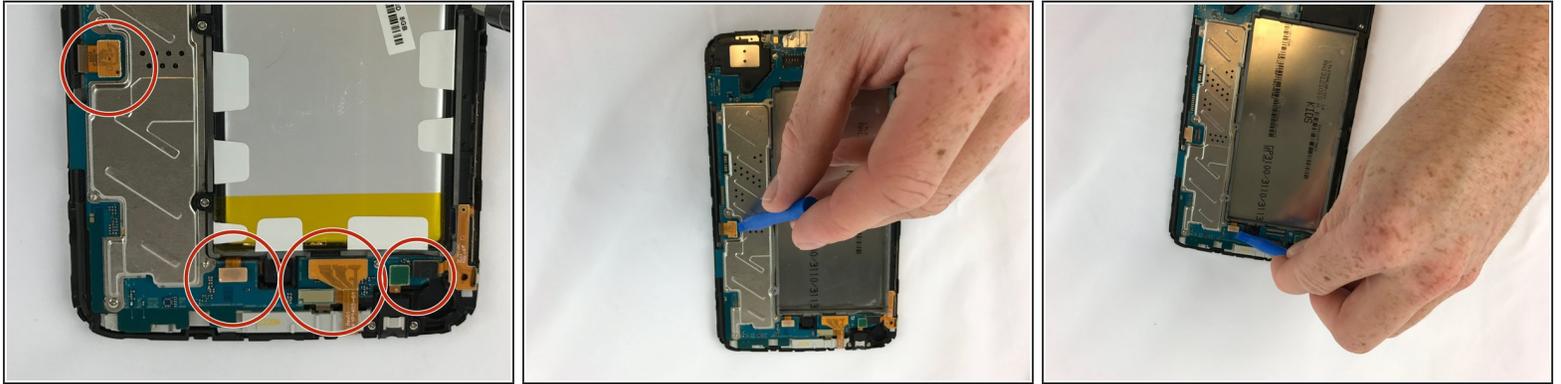


- Before Changing the motherboard, you have to lift up the (ZIF) zero insertion force by using the plastic opening tool, separating the connector from the batter ribbon cable

### Step 4




- Unscrew the ten 4mm PH000 bolts holding the motherboard on the device

## Step 5

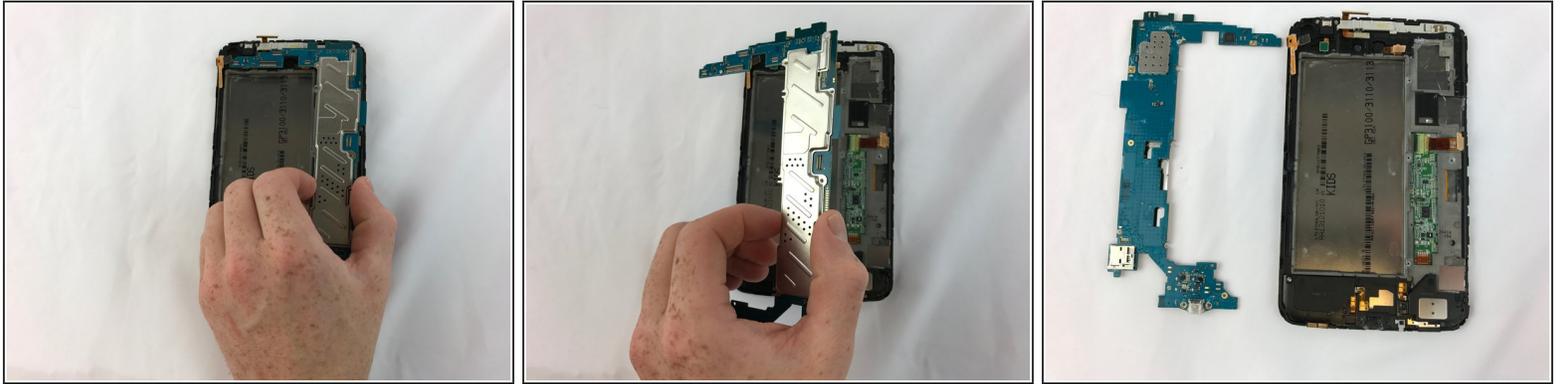


- Remove the motherboard from the device by carefully lifting it out.

## Step 6

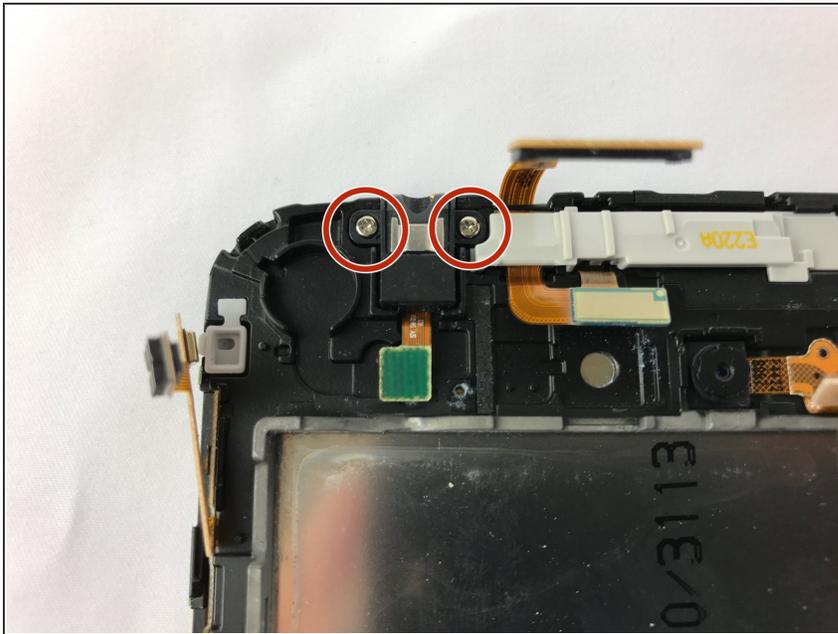

- Remove the two screws holding down the aux port.

## Step 7

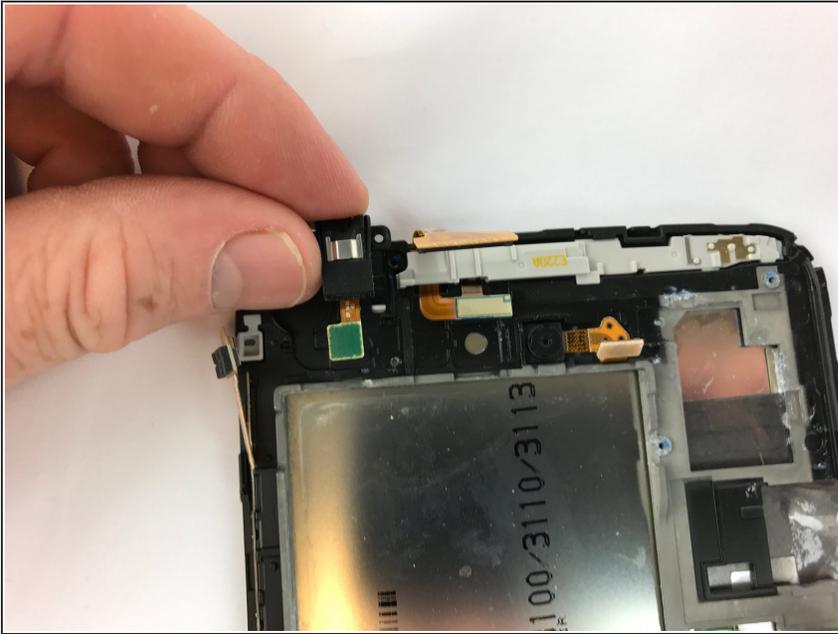

- Remove the Aux Port by gently lifting it out of the device.

To reassemble your device, follow these instructions in reverse order.